

SKU F00315000

PIUSI ST 200 AC Diesel Transfer Unit

High flow diesel transfer unit with two integrated E120 self-priming vane pumps in a metal frame. 230 V 50 Hz, 200 L/min, continuous duty, with bypass valve.

**200 L/min**

Flow rate

2 x E120

Integrated pumps

2.5 bar

Max pressure

Key features

- Two integrated E120 self-priming vane pumps
- Continuous duty
- Bypass valve and on/off switch
- Sturdy metallic frame
- 1 1/2" BSP outlet
- Wheels and handle available on request



Technical data


SPECIFICATION	VALUE
Order code	F00315000 (ST 200 BASIC)
Fluid	Diesel
Flow rate	200 L/min
Supply	230 V 50 Hz
Power	2050 W
Max current	10 A
Pumps	2 x E120
Max pressure	2.5 bar
Outlet	1 1/2" BSP
Body and rotor	Cast iron, sintered steel
Vanes and seal	Acetal resin, Viton
Shaft	Steel
Option	Handy Kit F16860000, handle and wheels

In the box

ST 200 AC unit and instruction manual.



Performance

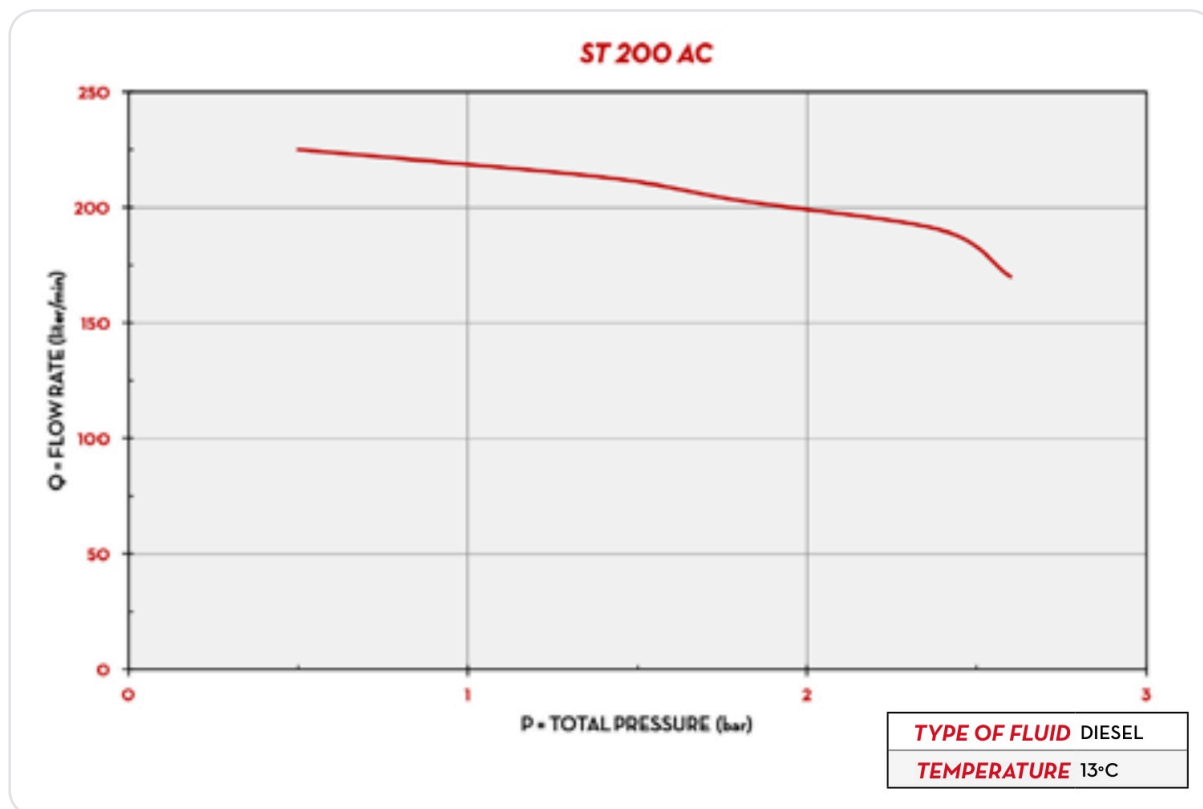

PIUSI ST 200 AC curve on diesel at 13°C.