



**No Waste. More Labels.
Less Effort.**

BradyPrinter i3300 Industrial Label Printer

No waste. More labels.

Less effort.

Picture your ideal label printing scenario – the labels and ribbons snap into place, there's no calibration process, you don't have to throw away blank labels before you actually print one. Ideal is now real with the BradyPrinter i3300 Industrial Label Printer. This mid-volume industrial label printer makes your identification projects easy, fast and affordable. Enjoy a variety of time and money-saving advantages, including:

- **No waste printing** – with print smart technology, you get auto setup and calibration without throwing out blank labels
- **Fast material changeovers** – foolproof drop-in label rolls and ribbons snap into place for 20-second material changeovers
- **Full-facility identification** – complete all of your identification tasks, from wires, panels and products to safety and facility labels, with one convenient and efficient tool

The complete BradyPrinter i3300 solution



BradyPrinter i3300
Industrial Label
Printer

Pages 2-6

Compatible labels
Product and Electronic Labels
Pages 8-11

Wire and Panel Labels
Pages 12-22

Safety and Facility Labels
Pages 23-31

Laboratory Specimen Labels
Pages 32-35

Compatible ribbons
Pages 36-37

Software for label
creation and data
integration


Page 38

Printer technical
specifications

Page 39

BradyPrinter i3300

INDUSTRIAL LABEL PRINTER

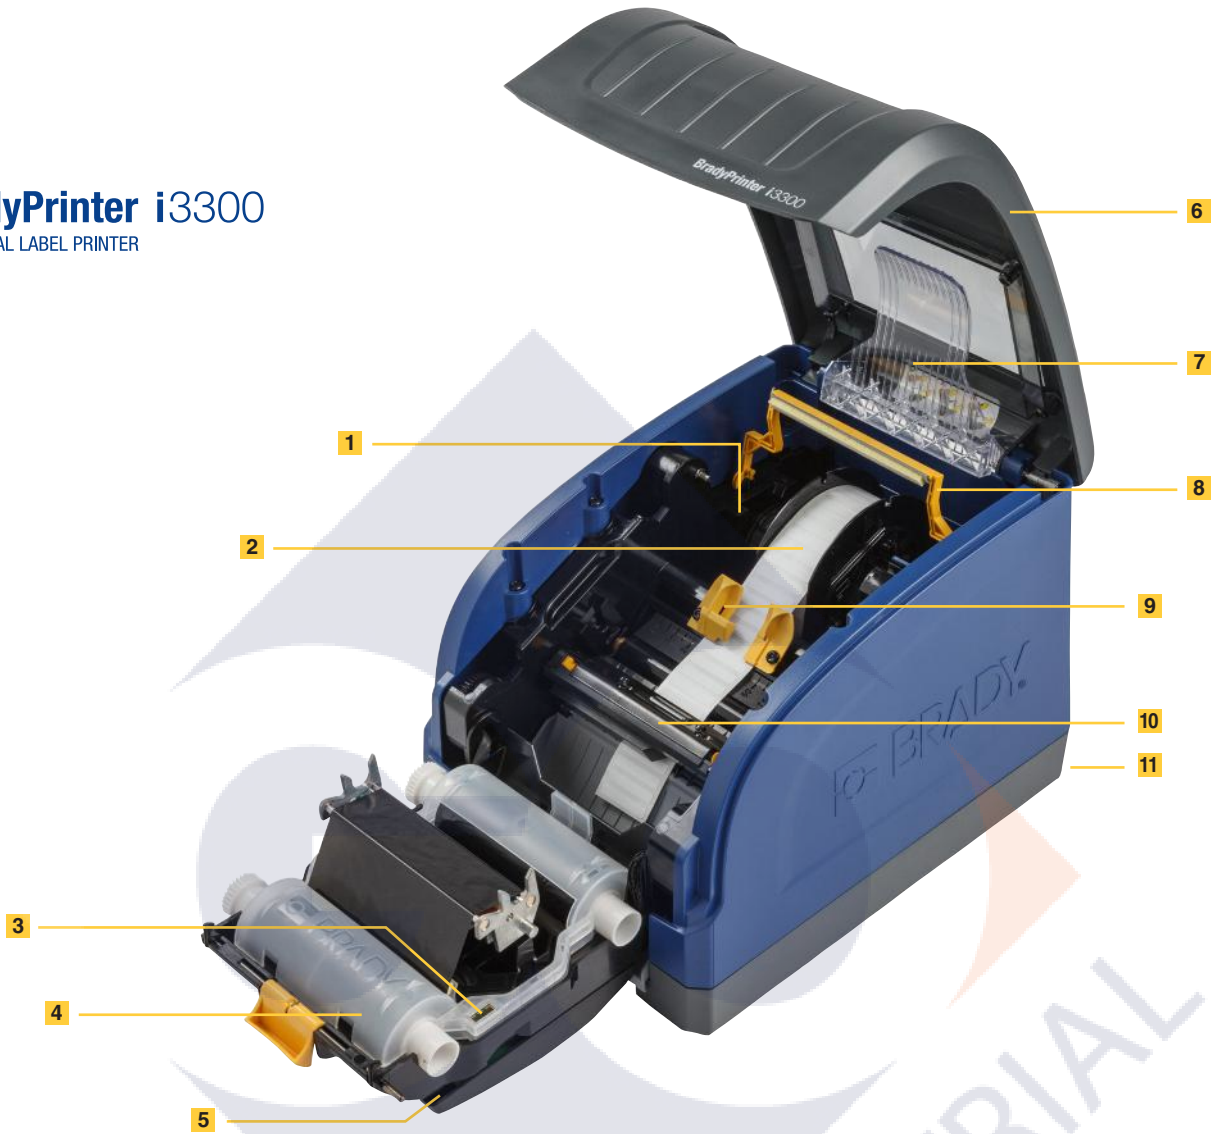

- 1 Media roll cartridge with auto part detection**
Printer auto-detects installed label part, communicating printer setting and part setup information to both printer and Brady software
- 2 15-second media roll changeover**
Media cartridge roll drops in and out of place quickly with minimal thread-through, no sensor adjustment, no calibration and no label waste
- 3 Ribbon cartridge with auto part detection**
Printer auto-detects installed ribbon part, then sets correct print heat level and shows a warning if incorrect ribbon is used
- 4 5-second ribbon changeover**
Ribbon cartridge snaps into place in one quick motion and guarantees the ink always faces the right direction to the print head
- 5 Colour touchscreen control panel**
Icons and sliders for easy printer setting adjustments and on-display part information and amount remaining

- 6 Top-loading design**
Reduces footprint in your work area and simplifies media alignment and loading
- 7 Double-sided PermaSleeve® bridge**
Lowered into place to allow printing second side of double-sided PermaSleeve wire markers
- 8 Media wiper arm**
Ensures dust-free surface and high print quality when printing large ink areas on continuous media. Felt pads are field-replaceable
- 9 Sensors located in guides**
Label sensor is always correctly positioned as guides are closed, meaning no sensor location trial and error, no calibration required and no wasted labels
- 10 Integrated auto cutter**
Built-in cutter for complete cut-through of media between labels, at end of job, or no cut at all
- 11 Interface options**
2x USB, 1x USB 2.0, 1x Ethernet (back of printer)



Prints on first label

No wasting labels with print smart technology

Print on every label or sleeve – no more blank first label. With print smart technology, the printer, labels, ribbons and software all work together for efficient label setup. It's all in the smart chip embedded in our materials – it stores the material size, type, colour, quantity and compatibility, and sets proper burn settings, sensor alignment and print speed. When installed, the chip sends that information to the printer and desktop software and auto calibrates without wasting any labels – and you get fast material setup and creation, without the waste.

Get no-hassle, 20-second material changeovers

Forget fumbling around with ribbon rolls that are great at rolling away or threading material around rollers or print heads. Switch to a new way of material changeovers with the BradyPrinter i3300 Industrial Label Printer. The easy-to-load label rolls and self-contained ribbons snap into place for easy 20-second material changeovers without cumbersome sensor adjustments. Switch materials frequently throughout the day? You'll save time to work on your more important tasks.



Easy drop-in loading

The right label from the right company

Nothing leaves Brady's doors without meeting the highest quality standards. Backed by more than 100 years of identification experience and rigorous R&D testing, Brady manufactures materials you can trust.



That strong background of material development allows us to create materials for all of your applications throughout your facility. Add the printing versatility of the BradyPrinter i3300 Industrial Label Printer, and you get a convenient tool for facility-wide identification that offers more than 825 parts and 70 material options, and additional custom label options for a variety of applications, including:

Product ID and production line applications



- Metallised labels and rating plates
- Work-in-process and barcode labels
- QA testing labels
- Anti-tamper labels
- Product labels

Electronics and PC board applications



- Polyimide labels
- Electrostatic dissipative labels
- Polyester labels
- Removable polyimide labels
- PC board component labels

Electrical and automation applications



- Wire markers and sleeves
- Inside panel labels
- Push button / engraved plate alternative labels
- Panel rating plate materials

Safety, maintenance and facility applications



- Pipe markers
- Safety signs and warnings
- Lean / 5S labels
- Floor marking
- GHS chemical labels

Laboratory and sample tracking applications



- Cryo tube and vial labels
- Labels for humidity, moisture, water bath and autoclave
- Slide labels / solvent-resistant labels
- Removable labels for glassware

BradyPrinter i3300 Label Printer and Accessories

Printer

Part No.	Description
878726	BradyPrinter i3300 Industrial Label Printer - WiFi

Printer ships with Brady Workstation Software (Safety Facility Identification and Product & Wire Identification Suites), power cord, USB cable, cleaning kit, cutter cleaning tool, quickstart guide, product CD with full user manual.

See page 38 for descriptions of Brady Workstation suites.

Brady WorkStation does not require the use of a driver. A Windows® driver for BradyPrinter i3300 is available if needed via free download from BradyID.com.au



Accessories

Part No.	Description
33969	Cleaning swabs soaked in IPA (pkg of 50 swabs)
108365	Rolling case w/ handle and supplies pockets
142114	5-pack of replaceable media wipers (fits BradyPrinter i3300)
142116	Cleaning tool for auto cutter blade




Windows® is a registered trademark of Microsoft Corporation.



Polyester Labels (B-422, B-423, B-430, B-432, B483, B-484A and B-489)

• For product, circuit board and component ID as well as for general purpose industrial identification.

B-423, B-483, B-489: Service temp: -70°C to 120°C

Agency approvals:   

B-430, B-432: Service temp: -40°C to 100°C

Agency approvals:   

B-484: Service temp: -40°C to 115°C

Agency approvals:  

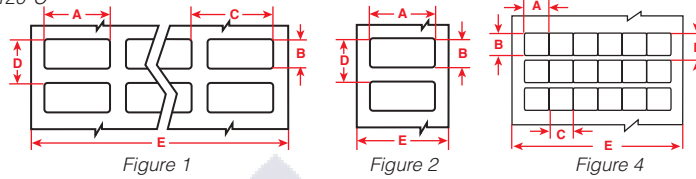


Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):												
Fig. 4	133774	B33-11-423	B-423	Gloss White	6.4	6.4	6.4	9.5	81.3	12	15000	B30-R6000
Fig. 1	133858	B33-38-423	B-423	Gloss White	9.5	9.5	11.1	12.1	81.3	9	5000	B30-R6000
Fig. 1	133801	B33-149-423	B-423	Gloss White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	133788	B33-1-423	B-423	Gloss White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R6000
Fig. 2	133871	B33-46-423	B-423	Gloss White	19.1	6.4	-	8.9	24.1	1	5000	B30-R6000
Fig. 2	133877	B33-49-423	B-423	Gloss White	22.9	6.4	-	8.9	27.9	1	5000	B30-R6000
Fig. 2	133769	B33-103-423	B-423	Gloss White	25.4	6.4	-	8.9	30.5	1	5000	B30-R6000
Fig. 1	133852	B33-3-423	B-423	Gloss White	25.4	9.5	27.3	12.1	85.1	3	5000	B30-R6000
Fig. 1	143076	B33-5-423	B-423	Gloss White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	133864	B33-43-423	B-423	Gloss White	31.8	6.4	-	8.9	36.8	1	5000	B30-R6000
Fig. 1	133845	B33-29-423	B-423	Gloss White	31.8	9.5	33.0	12.1	69.9	2	5000	B30-R6000
Fig. 2	133868	B33-45-423	B-423	Gloss White	38.1	6.4	-	8.9	43.2	1	5000	B30-R6000
Fig. 2	133961	B33-72-423	B-423	Gloss White	44.5	6.4	-	8.9	49.5	1	5000	B30-R6000
Fig. 2	133882	B33-53-423	B-423	Gloss White	50.8	12.7	-	15.2	55.9	1	2500	B30-R6000
Fig. 2	143087	B33-17-423	B-423	Gloss White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	143081	B33-18-423	B-423	Gloss White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	133827	B33-19-423	B-423	Gloss White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133893	B33-55-423	B-423	Gloss White	101.6	50.8	-	54.0	106.7	1	750	B30-R6000
Standard adhesive (B-430 clear):												
Fig. 1	133887	B33-5-430	B-430	Clear	25.4	12.7	27.3	15.9	85.1	3	5000	B30-R6000
Fig. 2	142885	B33-17-430	B-430	Clear	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	142886	B33-18-430	B-430	Clear	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Stronger adhesive for textured surfaces (B-422 gloss white):												
Fig. 1	133800	B33-149-422	B-422	Gloss White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	133886	B33-5-422	B-422	Gloss White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 1	133797	B33-147-422	B-422	Gloss White	38.1	9.5	41.9	12.1	85.1	2	2500	B30-R6000
Fig. 2	133768	B33-102-422	B-422	Gloss White	38.1	9.5	-	12.1	43.2	1	2500	B30-R6000
Fig. 2	133957	B33-136-422	B-422	Gloss White	38.1	19.0	-	22.2	43.2	1	1500	B30-R6000
Fig. 2	133815	B33-17-422	B-422	Gloss White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133822	B33-18-422	B-422	Gloss White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	133826	B33-19-422	B-422	Gloss White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133973	B33-76-422	B-422	Gloss White	101.6	76.2	-	79.4	106.7	1	500	B30-R6000
Stronger adhesive for textured surfaces (B-432 clear):												
Fig. 1	133803	B33-149-432	B-432	Clear	12.7	12.7	15.2	15.9	63.5	4	5000	B30-R6000
Fig. 1	122072	B33-5-432	B-432	Clear	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	143003	B33-17-432	B-432	Clear	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	143004	B33-18-432	B-432	Clear	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	143054	B33-19-432	B-432	Clear	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-483 gloss white):												
Fig. 1	133806	B33-149-483	B-483	Gloss White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	143075	B33-5-483	B-483	Gloss White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	143084	B33-17-483	B-483	Gloss White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133965	B33-7-483	B-483	Gloss White	69.9	31.8	-	34.9	74.9	1	1000	B30-R6000
Fig. 2	143079	B33-18-483	B-483	Gloss White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	142956	B33-19-483	B-483	Gloss White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133897	B33-55-483	B-483	Gloss White	101.6	50.8	-	54.0	106.7	1	750	B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-489 matte white):												
Fig. 1	143062	B33-5-489	B-489	Matte White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 2	142969	B33-17-489	B-489	Matte White	50.8	25.4	-	28.6	55.9	1	1500	B30-R4300
Fig. 2	143052	B33-18-489	B-489	Matte White	76.2	25.4	-	28.6	81.3	1	1500	B30-R4300
Fig. 2	142958	B33-19-489	B-489	Matte White	76.2	50.8	-	54.0	81.3	1	500	B30-R4300
Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A gloss white):												
Fig. 2	133786	B33-125-484	B-484A	Gloss White	22.9	12.7	-	15.2	27.9	1	1500	B30-R6000
Fig. 1	133892	B33-5-484	B-484A	Gloss White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	133787	B33-136-484	B-484A	Gloss White	38.1	19.1	-	22.2	43.2	1	1500	B30-R6000
Fig. 2	133816	B33-17-484	B-484A	Gloss White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133824	B33-18-484	B-484A	Gloss White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	133830	B33-19-484	B-484A	Gloss White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000

All part numbers above are compatible with BradyPrinter i3300 and BBP[®]33. Parts may also be compatible with BradyPrinter S3100, BBP[®]31, BBP[®]35 and BBP[®]37 printers. Visit BradyID.com.au to confirm compatibility.

Metallised Polyester Labels (B-428, B-434, B-435, B-438, B-486 and B-565)

- For product labelling, asset tracking and general industrial ID
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish

B-428: Service temp: -40°C to 145°C
B-434: Service temp: -40°C to 90°C
B-435: Service temp: -40°C to 90°C
B-438: Service temp: -40°C to 40°C
B-486: Service temp: -40°C to 120°C
B-565: Service temp: -40°C to 116°C

Agency approvals:   
 Agency approvals:   
 Agency approvals:   
 Agency approvals:   
 Agency approvals:   





Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive for smooth surfaces (B-428 matte):												
Fig. 1	142880	B33-5-428	B-428	Matte Silver	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 2	133884	B33-53-428	B-428	Matte Silver	50.8	12.7	-	15.2	55.9	1	2500	B30-R4300
Fig. 2	143085	B33-17-428	B-428	Matte Silver	50.8	25.4	-	28.6	55.9	1	1500	B30-R4300
Fig. 2	142881	B33-18-428	B-428	Matte Silver	76.2	25.4	-	28.6	81.3	1	1500	B30-R4300
Fig. 2	133828	B33-19-428	B-428	Matte Silver	76.2	50.8	-	54.0	81.3	1	500	B30-R4300
Fig. 3	133996	B33C-3000-428	B-428	Matte Silver	76.2	25.9m	-	-	86.4	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-565 matte):												
Fig. 3	117922	B30C-1125-565-SL	B-565	Matte Silver	28.6	30.5m	-	-	34.9	1 roll (cont.)		B30-R4300
Fig. 3	117921	B30C-2250-565-SL	B-565	Matte Silver	57.5	30.5m	-	-	63.4	1 roll (cont.)		B30-R4300
Fig. 3	117920	B30C-4000-565-SL	B-565	Matte Silver	101.6	30.5m	-	-	106.7	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-435 gloss):												
Fig. 2	133823	B33-18-435	B-435	Gloss Silver	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	133829	B33-19-435	B-435	Gloss Silver	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133896	B33-55-435	B-435	Gloss Silver	101.6	50.8	-	54.0	106.7	1	750	B30-R6000
Stronger adhesive for rougher surfaces (B-434 gloss):												
Fig. 1	142963	B33-5-434	B-434	Gloss Silver	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	133958	B33-136-434	B-434	Gloss Silver	38.1	19.1	-	22.2	43.2	1	1500	B30-R6000
Fig. 2	142968	B33-17-434	B-434	Gloss Silver	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	142954	B33-18-434	B-434	Gloss Silver	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	142955	B33-19-434	B-434	Gloss Silver	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133895	B33-55-434	B-434	Gloss Silver	101.6	50.8	-	54.0	106.7	1	750	B30-R6000
Ultra-aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486 matte):												
Fig. 2	133954	B33-59-486	B-486	Matte Silver	25.4	12.7	-	15.2	30.5	1	2500	B30-R4300
Fig. 1	142879	B33-5-486	B-486	Matte Silver	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 2	133885	B33-53-486	B-486	Matte Silver	50.8	12.7	-	15.2	55.9	1	2500	B30-R4300
Fig. 2	143083	B33-17-486	B-486	Matte Silver	50.8	25.4	-	28.6	55.9	1	1300	B30-R4300
Fig. 2	133966	B33-7-486	B-486	Matte Silver	69.9	31.8	-	34.9	74.9	1	1000	B30-R4300
Fig. 2	143078	B33-18-486	B-486	Matte Silver	76.2	25.4	-	28.6	81.3	1	1300	B30-R4300
Fig. 2	142957	B33-19-486	B-486	Matte Silver	76.2	50.8	-	54.0	81.3	1	500	B30-R4300
Fig. 2	133975	B33-76-486	B-486	Matte Silver	101.6	76.2	-	79.4	106.7	1	500	B30-R4300
Fig. 2	133812	B33-161-486	B-486	Matte Silver	101.6	101.6	-	104.8	106.7	1	250	B30-R4300

Tamper-Evident Asset ID Labels (B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use






Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 2	118076	B30-17-438	B-438	Matte Silver	50.8	25.4	63.5	28.6	1	1225	B30-R4300
Fig. 2	118077	B30-18-438	B-438	Matte Silver	76.2	25.4	82.6	31.8	1	1225	B30-R4300
Fig. 2	118078	B30-222-438	B-438	Matte Silver	76.2	50.8	82.6	57.2	1	650	B30-R4300
Fig. 3	118014	B30C-3000-438-SL	B-438	Matte Silver	76.2	30.5m	-	82.6	1 roll (cont.)		B30-R4300

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Standard Polyimide Labels (B-724 and B-727)

- Top- or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

B-727: Service temp: -70°C to 100°C (short burst max temp: 80 sec at 300°C, 5 min at 260°C, 2 hrs at 170°C)
Agency approvals:  RoHS

B-724: Service temp: -70°C to 270°C (short burst max temp: 80 sec at 330°C, 5 min at 280°C)
Agency approvals: RoHS

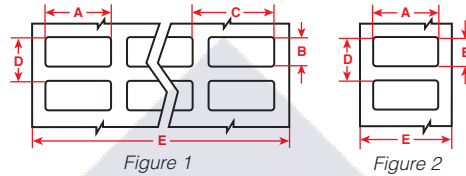


Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard temperature (B-727 gloss white):												
Fig. 1	140725	B33-11-727	B-727	Gloss White	6.35	6.4	6.4	9.5	81.3	12	5000	B30-R6000
Fig. 1	133860	B33-38-727	B-727	Gloss White	9.5	9.5	11.1	12.1	81.3	9	5000	B30-R6000
Fig. 1	133804	B33-149-727	B-727	Gloss White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	140727	B33-1-727	B-727	Gloss White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R6000
Fig. 2	140729	B33-49-727	B-727	Gloss White	22.9	6.4	-	8.9	27.9	1	5000	B30-R6000
Fig. 1	133834	B33-2-727	B-727	Gloss White	22.9	6.4	28.6	8.9	85.1	3	5000	B30-R6000
Fig. 2	140730	B33-103-727	B-727	Gloss White	25.4	6.4	-	8.9	30.5	1	5000	B30-R6000
Fig. 2	140731	B33-58-727	B-727	Gloss White	25.4	9.5	-	12.1	30.5	1	4000	B30-R6000
Fig. 2	140732	B33-59-727	B-727	Gloss White	25.4	12.7	-	15.2	30.5	1	2500	B30-R6000
Fig. 2	140733	B33-43-727	B-727	Gloss White	31.8	6.4	-	8.9	36.8	1	5000	B30-R6000
Fig. 2	140734	B33-44-727	B-727	Gloss White	34.9	6.4	-	8.9	40.6	1	5000	B30-R6000
Fig. 2	140735	B33-45-727	B-727	Gloss White	38.1	6.4	-	8.9	43.2	1	5000	B30-R6000
Fig. 2	133962	B33-72-727	B-727	Gloss White	44.5	6.4	-	8.9	49.5	1	5000	B30-R6000
Extremely high temperature (B-724 matte amber):												
Fig. 1	133802	B33-149-724	B-724	Matte Amber	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R4300
Fig. 2	133872	B33-46-724	B-724	Matte Amber	19.1	6.4	-	8.9	24.1	1	5000	B30-R4300
Fig. 1	133789	B33-1-724	B-724	Matte Amber	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R4300
Fig. 1	140723	B33-2-724	B-724	Matte Amber	22.9	6.4	28.6	8.9	85.1	3	5000	B30-R4300
Fig. 2	133865	B33-43-724	B-724	Matte Amber	31.8	6.4	-	8.9	36.8	1	5000	B30-R4300
Fig. 1	140724	B33-4-724	B-724	Matte Amber	38.1	6.4	-	8.9	85.1	2	5000	B30-R4300

Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40°C to 51°C Agency approvals: RoHS




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 2	133883	B33-53-424	B-424	White	50.8	12.7	-	15.2	55.9	1	2500	B30-R4300
Fig. 2	143086	B33-17-424	B-424	White	50.8	25.4	28.6	55.9	-	1	1500	B30-R4300
Fig. 2	133964	B33-7-424	B-424	White	69.9	31.8	-	34.9	74.9	1	1000	B30-R4300
Fig. 2	143080	B33-18-424	B-424	White	76.2	25.4	28.6	81.3	-	1	1500	B30-R4300
Fig. 2	143070	B33-19-424	B-424	White	76.2	50.8	54.0	81.3	-	1	500	B30-R4300
Fig. 2	133832	B33-20-424	B-424	White	76.2	127	-	130.2	81.3	1	250	B30-R4300
Fig. 2	133894	B33-55-424	B-424	White	101.6	50.8	-	54.0	106.7	1	750	B30-R4300
Fig. 2	143069	B33-25-424	B-424	White	101.6	152.4	155.6	106.7	-	1	350	B30-R4300

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Static Dissipative Polyimide Labels (B-717, B-718 and B-719)

- Circuit board and electronic component ID with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 packaging material standards for ESD sensitive items
- For top or bottom-side component or board identification

All: Service temp: -70°C to 100°C (short burst max temp:
80 sec at 300°C, 5 min at 260°C, 2 hrs at 170°C)

Agency approvals:  

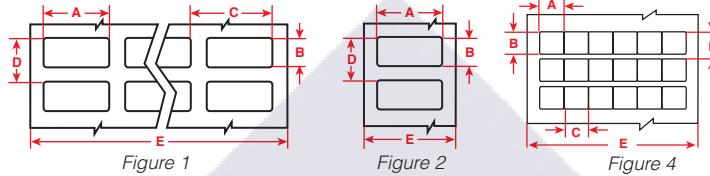







Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard thickness (B-717 gloss white):												
Fig. 2	* 133873	B33-46-717	B-717	Gloss White	19.1	6.4	-	8.9	24.1	1	5000	B30-R6000
Fig. 2	* 133770	B33-103-717	B-717	Gloss White	25.4	6.4	-	8.9	30.5	1	5000	B30-R6000
Fig. 2	* 134343	B33-43-717	B-717	Gloss White	31.8	6.4	-	8.9	36.8	1	5000	B30-R6000
Fig. 2	* 133869	B33-45-717	B-717	Gloss White	38.1	6.4	-	8.9	43.2	1	5000	B30-R6000
Low profile label (B-718 gloss white):												
Fig. 4	* 133779	B33-11-718	B-718	Gloss White	6.4	6.4	6.4	9.5	81.3	12	1500	B30-R6000
Fig. 1	* 133861	B33-38-718	B-718	Gloss White	9.5	9.5	11.1	12.1	81.3	9	5000	B30-R6000
Fig. 1	* 133805	B33-149-718	B-718	Gloss White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	* 133798	B33-1-718	B-718	Gloss White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R6000
Fig. 2	* 133874	B33-46-718	B-718	Gloss White	19.1	6.4	-	8.9	24.1	1	5000	B30-R6000
Fig. 2	* 133878	B33-49-718	B-718	Gloss White	22.9	6.4	-	8.9	27.9	1	5000	B30-R6000
Fig. 2	* 148803	B33-43-718	B-718	Gloss White	31.8	6.4	-	8.9	36.8	1	5000	B30-R6000
Fig. 2	* 133870	B33-45-718	B-718	Gloss White	38.1	6.4	-	8.9	43.2	1	5000	B30-R6000
Fig. 2	* 133963	B33-72-718	B-718	Gloss White	44.5	6.4	-	8.9	49.5	1	5000	B30-R6000
Low profile label to prevent sticking of solder balls (B-719 matte white):												
Fig. 1	* 133862	B33-38-719	B-719	Matte White	9.5	9.5	11.1	12.1	81.3	9	5000	B30-R6000
Fig. 2	* 133875	B33-46-719	B-719	Matte White	19.1	6.4	-	8.9	24.1	1	5000	B30-R6000
Fig. 1	* 133836	B33-2-719	B-719	Matte White	22.9	6.4	28.6	8.9	85.1	3	5000	B30-R6000
Fig. 2	* 134344	B33-43-719	B-719	Matte White	31.8	6.4	-	8.9	36.8	1	5000	B30-R6000

*  **WARNING:** Cancer www.P65Warnings.ca.gov

Polypropylene Labels (B-425)

- General labelling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

Service temp: -70°C to 100°C

Agency approvals:    

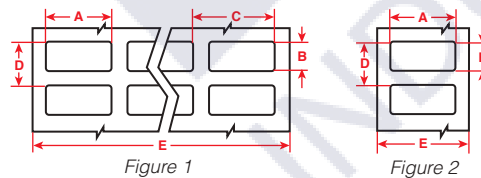


Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 1	142962	B33-5-425	B-425	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 2	142891	B33-17-425	B-425	White	50.8	25.4	-	28.6	55.9	1	1500	B30-R4300
Fig. 2	142892	B33-18-425	B-425	White	76.2	25.4	-	28.6	81.3	1	1500	B30-R4300
Fig. 2	143053	B33-19-425	B-425	White	76.2	50.8	-	54.0	81.3	1	500	B30-R4300

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Raised Profile Labels – Engraved Plate Substitutes – Push Button Style (B-593)

Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates
- 10-year outdoor durability rating
- On-demand labelling: labels print out in fewer than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole dia. keyed)

Service temp: -20°C to 100°C Application temp: 10°C to 100°C

Average outdoor durability: Up to 10 years

Agency approvals:   




Figure 18b
(Without key hole)




Figure 18a



Diagram	Part No.	Catalogue No.	B#	Colour	Label Height A mm	Label Width B mm	Hole Diameter C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18a	118051	B30EP-167-593-WT	B-593	White	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18b	118056	B30EP-167U-593-WT	B-593	White	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18a	118066	B30EP-169-593-WT	B-593	White	45.7	45.7	30.5	50.8	63.5	1	190	B30-R6000
Fig. 18a	118061	B30EP-168-593-WT	B-593	White	48.3	30.5	22.5	54.0	63.5	1	180	B30-R6000
Fig. 18a	118071	B30EP-170-593-WT	B-593	White	60.9	60.9	30.5	66.7	82.6	1	145	B30-R6000
Fig. 18a	118053	B30EP-167-593-YL	B-593	Yellow	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18b	118058	B30EP-167U-593-YL	B-593	Yellow	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18a	118068	B30EP-169-593-YL	B-593	Yellow	45.7	45.7	30.5	50.8	63.5	1	190	B30-R6000
Fig. 18a	118063	B30EP-168-593-YL	B-593	Yellow	48.3	30.5	22.5	54.0	63.5	1	180	B30-R6000
Fig. 18a	118073	B30EP-170-593-YL	B-593	Yellow	60.9	60.9	30.5	66.7	82.6	1	145	B30-R6000
Fig. 18a	118055	B30EP-167-593-BK	B-593	Black	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18b	118060	B30EP-167U-593-BK	B-593	Black	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18a	118070	B30EP-169-593-BK	B-593	Black	45.7	45.7	30.5	50.8	63.5	1	190	B30-R4400-WT
Fig. 18a	118065	B30EP-168-593-BK	B-593	Black	48.3	30.5	22.5	54.0	63.5	1	180	B30-R4400-WT
Fig. 18a	118075	B30EP-170-593-BK	B-593	Black	60.9	60.9	30.5	66.7	82.6	1	145	B30-R4400-WT
Fig. 18a	118054	B30EP-167-593-GN	B-593	Green	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18b	118059	B30EP-167U-593-GN	B-593	Green	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18a	118069	B30EP-169-593-GN	B-593	Green	45.7	45.7	30.5	50.8	63.5	1	190	B30-R4400-WT
Fig. 18a	118064	B30EP-168-593-GN	B-593	Green	48.3	30.5	22.5	54.0	63.5	1	180	B30-R4400-WT
Fig. 18a	118074	B30EP-170-593-GN	B-593	Green	60.9	60.9	30.5	66.7	82.6	1	145	B30-R4400-WT
Fig. 18a	118074	B30EP-167-593-RD	B-593	Red	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18b	118057	B30EP-167U-593-RD	B-593	Red	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18a	118067	B30EP-169-593-RD	B-593	Red	45.7	45.7	30.5	50.8	63.5	1	190	B30-R4400-WT
Fig. 18a	118062	B30EP-168-593-RD	B-593	Red	48.3	30.5	22.5	54.0	63.5	1	180	B30-R4400-WT
Fig. 18a	118072	B30EP-170-593-RD	B-593	Red	60.9	60.9	30.5	66.7	82.6	1	145	B30-R4400-WT

U.S. Patent Nos. US8475914B2; US9005729B2.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Raised Profile Labels – Engraved Plate Substitutes – Rectangular Style (B-593)

Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- Ideal for inside-panel backer board labels and front-of-enclosure labelling
- Costs up to 80% less than engraved plates and prints out in about 4 seconds
- 10-year outdoor durability rating





Figure 18c



Service temp: -20°C to 100°C Application temp: 10°C to 100°C
Average outdoor durability: Up to 10 years
Agency approvals:

Diagram	Part No.	Catalogue No.	B#	Colour	Label Height A mm	Label Width B mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18c	118015	B30EP-171-593-WT	B-593	White	12.5	26.9	19.1	34.9	1	500	B30-R6000
Fig. 18c	118021	B30EP-172-593-WT	B-593	White	15.0	45.0	21.6	63.5	1	450	B30-R6000
Fig. 18c	118039	B30EP-175-593-WT	B-593	White	19.1	76.2	25.4	82.6	1	375	B30-R6000
Fig. 18c	118027	B30EP-173-593-WT	B-593	White	25.4	50.8	31.8	63.5	1	300	B30-R6000
Fig. 18c	118033	B30EP-174-593-WT	B-593	White	25.4	101.6	31.8	108.0	1	300	B30-R6000
Fig. 18c	118043	B30EP-176-593-WT	B-593	White	25.4	76.2	31.8	82.6	1	300	B30-R6000
Fig. 18c	118047	B30EP-177-593-WT	B-593	White	63.5	76.2	69.9	82.6	1	125	B30-R6000
Fig. 18c	118017	B30EP-171-593-YL	B-593	Yellow	12.5	26.9	19.1	34.9	1	500	B30-R6000
Fig. 18c	118023	B30EP-172-593-YL	B-593	Yellow	15.0	45.0	21.6	63.5	1	450	B30-R6000
Fig. 18c	118040	B30EP-175-593-YL	B-593	Yellow	19.1	76.2	25.4	82.6	1	375	B30-R6000
Fig. 18c	118029	B30EP-173-593-YL	B-593	Yellow	25.4	50.8	31.8	63.5	1	300	B30-R6000
Fig. 18c	118035	B30EP-174-593-YL	B-593	Yellow	25.4	101.6	31.8	108.0	1	300	B30-R6000
Fig. 18c	118044	B30EP-176-593-YL	B-593	Yellow	25.4	76.2	31.8	82.6	1	300	B30-R6000
Fig. 18c	118048	B30EP-177-593-YL	B-593	Yellow	63.5	76.2	69.9	82.6	1	125	B30-R6000
Fig. 18c	118020	B30EP-171-593-BK	B-593	Black	12.5	26.9	19.1	34.9	1	500	B30-R4400-WT
Fig. 18c	118026	B30EP-172-593-BK	B-593	Black	15.0	45.0	21.6	63.5	1	450	B30-R4400-WT
Fig. 18c	118042	B30EP-175-593-BK	B-593	Black	19.1	76.2	25.4	82.6	1	375	B30-R4400-WT
Fig. 18c	118032	B30EP-173-593-BK	B-593	Black	25.4	50.8	31.8	63.5	1	300	B30-R4400-WT
Fig. 18c	118038	B30EP-174-593-BK	B-593	Black	25.4	101.6	31.8	108.0	1	300	B30-R4400-WT
Fig. 18c	118046	B30EP-176-593-BK	B-593	Black	25.4	76.2	31.8	82.6	1	300	B30-R4400-WT
Fig. 18c	118050	B30EP-177-593-BK	B-593	Black	63.5	76.2	69.9	82.6	1	125	B30-R4400-WT
Fig. 18c	118018	B30EP-171-593-GN	B-593	Green	12.5	26.9	19.1	34.9	1	500	B30-R4400-WT
Fig. 18c	118024	B30EP-172-593-GN	B-593	Green	15.0	45.0	21.6	63.5	1	450	B30-R4400-WT
Fig. 18c	118041	B30EP-175-593-GN	B-593	Green	19.1	76.2	25.4	82.6	1	375	B30-R4400-WT
Fig. 18c	118030	B30EP-173-593-GN	B-593	Green	25.4	50.8	31.8	63.5	1	300	B30-R4400-WT
Fig. 18c	118036	B30EP-174-593-GN	B-593	Green	25.4	101.6	31.8	108.0	1	300	B30-R4400-WT
Fig. 18c	118045	B30EP-176-593-GN	B-593	Green	25.4	76.2	31.8	82.6	1	300	B30-R4400-WT
Fig. 18c	118049	B30EP-177-593-GN	B-593	Green	63.5	76.2	69.9	82.6	1	125	B30-R4400-WT
Fig. 18c	118016	B30EP-171-593-RD	B-593	Red	12.5	26.9	19.1	34.9	1	500	B30-R4400-WT
Fig. 18c	118022	B30EP-172-593-RD	B-593	Red	15.0	45.0	21.6	63.5	1	450	B30-R4400-WT
Fig. 18c	118028	B30EP-173-593-RD	B-593	Red	25.4	50.8	31.8	63.5	1	300	B30-R4400-WT
Fig. 18c	118034	B30EP-174-593-RD	B-593	Red	25.4	101.6	31.8	108.0	1	300	B30-R4400-WT
Fig. 18c	118019	B30EP-171-593-SL	B-593	Silver	12.5	26.9	19.1	34.9	1	500	B30-R6000
Fig. 18c	118025	B30EP-172-593-SL	B-593	Silver	15.0	45.0	21.6	63.5	1	450	B30-R6000
Fig. 18c	118031	B30EP-173-593-SL	B-593	Silver	25.4	50.8	31.8	63.5	1	300	B30-R6000
Fig. 18c	118037	B30EP-174-593-SL	B-593	Silver	25.4	101.6	31.8	108.0	1	300	B30-R6000

U.S. Patent Nos. US8475914B2; US9005729B2.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Panel ID Labels (B-483, B-484A, B-499, B-593 and B-595)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40°C to 120°C Agency approvals:

B-484A: Service temp: -40°C to 115°C Agency approvals:

B-499: Service temp: -40°C to 89°C Agency approvals:

B-593: Service temp: -4°C to 100°C Agency approvals:

B-595: Service temp: -40°C to 82°C, 8-10 years average outdoor durability Agency approvals:




Figure 1




Figure 2




Figure 3




Figure 18c




Figure 70

Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth - Permanent adhesive (B-499):												
Fig. 1	143018	B33-68-499	B-499	White	12.7	19.1	15.2	22.2	63.5	4	1500	B30-R6000
Fig. 1	143002	B33-165-499	B-499	White	20.3	36.5	22.9	39.7	94.0	4	2500	B30-R6000
Fig. 2	142995	B33-125-499	B-499	White	22.9	12.7	-	-	-	1	1500	B30-R6000
Fig. 1	143011	B33-126-499	B-499	White	22.9	12.7	-	-	-	2	1500	B30-R6000
Fig. 2	143001	B33-163-499	B-499	White	25.4	9.5	-	-	-	1	1500	B30-R6000
Fig. 1	143017	B33-152-499	B-499	White	25.4	9.5	-	-	-	2	1500	B30-R6000
Fig. 2	142997	B33-136-499	B-499	White	38.1	19.1	-	22.2	45.0	1	1500	B30-R6000
Fig. 2	143066	B33-137-499	B-499	White	50.8	25.4	-	28.6	55.9	1	1100	B30-R6000
Fig. 2	142995	B33-125-499	B-499	White	50.8	6.4	-	-	-	1	1500	B30-R6000
Polyester - Ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):												
Fig. 1	133806	B33-149-483	B-483	White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	143075	B33-5-483	B-483	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	143084	B33-17-483	B-483	White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133965	B33-7-483	B-483	White	69.9	31.8	-	34.9	74.9	1	1000	B30-R6000
Fig. 2	143079	B33-18-483	B-483	White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	142956	B33-19-483	B-483	White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133897	B33-55-483	B-483	White	101.6	50.8	-	54.0	106.7	1	750	B30-R6000
Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):												
Fig. 2	133786	B33-125-484	B-484A	White	22.9	12.7	-	15.2	27.9	1	1500	B30-R6000
Fig. 1	133892	B33-5-484	B-484A	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	133787	B33-136-484	B-484A	White	38.1	19.1	-	22.2	43.2	1	1500	B30-R6000
Fig. 2	133816	B33-17-484	B-484A	White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133824	B33-18-484	B-484A	White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	133830	B33-19-484	B-484A	White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Raised Profile Polyester - Thick raised profile label with ultra-aggressive adhesive (B-593):												
Fig. 18c	118015	B30EP-171-593-WT	B-593	White	12.5	26.9	-	19.1	34.9	1	500	B30-R6000
Fig. 18c	118020	B30EP-171-593-BK	B-593	Black	12.5	26.9	-	19.1	34.9	1	500	B30-R6000
Pre-Printed Vinyl - Permanent adhesive, conformable; Indoor / outdoor grade (B-595):												
Fig. 70	142191	B30-241-595-OSHADA	B-595		57.5	76.2	-	-	-	1	300	B30-R10000
Fig. 70	142190	B30-25-595-OSHADA	B-595		101.6	152.4	-	-	-	1	175	B30-R10000
Fig. 70	972946	-	B-595		57.5	76.2	-	-	-	1	300	B30-R10000
Fig. 70	872948	-	B-595		101.6	152.4	-	-	-	1	175	B30-R10000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Self-Laminating Wire and Cable Labels (B-427)

- One of Brady's most popular wire markers!
- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40°C to 70°C

Agency approvals:  




Figure 9a




Figure 12




Figure 14




Figure 15

Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Print Area Height F mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 12	143094	B33-80-427	B-427	White	12.7	19.1	15.2	24.1	63.5	9.5	4	2500	B30-R4300
Fig. 12	143101	B33-113-427	B-427	White	12.7	25.4	15.2	24.1	63.5	9.5	4	2500	B30-R4300
Fig. 12	143092	B33-8-427	B-427	White	12.7	36.5	16.8	41.3	85.1	12.7	5	5000	B30-R4300
Fig. 12	143097	B33-56-427	B-427	White	19.1	23.8	20.3	28.6	85.1	9.5	4	5000	B30-R4300
Fig. 12	143008	B33-73-427	B-427	White	19.1	44.6	20.3	47.6	85.1	12.7	4	3500	B30-R4300
Fig. 12	143096	B33-74-427	B-427	White	20.3	36.5	20.3	41.3	86.4	12.7	4	4000	B30-R4300
Fig. 12	133780	B33-115-427	B-427	White	25.4	19.1	27.9	22.2	58.4	9.5	2	2500	B30-R4300
Fig. 12	143102	B33-116-427	B-427	White	25.4	25.4	27.9	28.6	58.4	9.5	2	2500	B30-R4300
Fig. 12	143091	B33-9-427	B-427	White	25.4	36.5	27.3	41.3	85.1	12.7	3	2500	B30-R4300
Fig. 12	143095	B33-75-427	B-427	White	25.4	57.2	27.9	60.3	58.4	19.1	2	1400	B30-R4300
Fig. 15	142996	B33-131-427	B-427	White	25.4	66.7	-	28.6	71.8	25.4	1	1500	B30-R4300
Fig. 12	143099	B33-10-427	B-427	White	25.4	95.3	27.3	101.6	85.1	25.4	3	1200	B30-R4300
Fig. 12	143093	B33-81-427	B-427	White	25.4	152.4	27.9	157.1	58.4	38.1	2	500	B30-R4300
Fig. 9a	142952	B33-135-427AW	B-427	White	38.1	19.1	-	22.2	43.2	-	1	1500	B30-R4300
Fig. 14	143042	B33-118-427	B-427	White	38.1	25.4	-	28.6	43.2	9.5	1	1250	B30-R4300
Fig. 14	142870	B33-119-427	B-427	White	38.1	38.1	-	44.5	43.2	12.7	1	1000	B30-R4300
Fig. 14	133841	B33-272-427	B-427	White	38.1	57.2	-	63.5	43.2	19.1	1	700	B30-R4300
Fig. 14	142994	B33-120-427	B-427	White	44.5	25.4	-	28.6	49.5	9.5	1	1250	B30-R4300
Fig. 14	142871	B33-121-427	B-427	White	44.5	38.1	-	44.5	49.5	12.7	1	1000	B30-R4300
Fig. 14	133842	B33-273-427	B-427	White	44.5	57.2	-	63.5	49.5	19.1	1	500	B30-R4300
Fig. 9a	143045	B33-137-427AW	B-427	White	50.8	25.4	-	28.6	55.9	-	1	1500	B30-R4300
Fig. 14	143098	B33-27-427	B-427	White	50.8	95.3	-	101.6	55.9	25.4	1	400	B30-R4300
Fig. 14	142882	B33-26-427	B-427	White	63.5	57.2	-	61.9	68.8	19.1	1	500	B30-R4300
Fig. 14	133977	B33-82-427	B-427	White	50.8	152.4	-	157.1	55.9	38.1	1	200	B30-R4300

Zero-Halogen Cable Markers (B-7643)

Thermoplastic Polyether Polyurethane is a zero-halogen high-density, thermoplastic cable marker designed for dot matrix or thermal-transfer printing.

- Meets the requirements of a halogen-free material per IEC 61249-2-21 (2003-11)
- Excellent chemical, oil and water resistance
- RoHS compliant using EU Directive 2002/95/EC
- Operating temperature of -40°C to 90°C




Figure 61



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 61	195554	B33-6010-7643-WT	B-7643	White	60	9.91	1	500	B30-R6000
Fig. 61	195560	B33-7525-7643-WT	B-7643	White	75	24.9	1	250	B30-R6000
Fig. 61	195556	B33-7510-7643-WT	B-7643	White	75	9.91	1	500	B30-R6000
Fig. 61	195558	B33-7515-7643-WT	B-7643	White	75	14.9	1	500	B30-R6000
Fig. 61	195555	B33-6010-7643-YL	B-7643	Yellow	60	9.91	1	500	B30-R6000
Fig. 61	195561	B33-7525-7643-YL	B-7643	Yellow	75	24.9	1	250	B30-R6000
Fig. 61	195557	B33-7510-7643-YL	B-7643	Yellow	75	9.91	1	500	B30-R6000
Fig. 61	195559	B33-7515-7643-YL	B-7643	Yellow	75	14.9	1	500	B30-R6000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

High-Temp Adhesive Topcoated Polyvinylfluoride Wire and Cable Labels (B-437)

- Topcoated polyvinylfluoride label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy duty performance with excellent resistance to water, oil and other fluids
- Meets MIL-M-87958 Standard

Service temp: -70°C to 135°C
Agency approvals: **RoHS**




Figure 1




Figure 3




Figure 4

Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 4	133776	B33-11-437	B-437	White	6.4	6.4	6.4	9.5	81.3	12	15000	B30-R4300
Fig. 1	133791	B33-1-437	B-437	White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R4300
Fig. 1	133833	B33-2-437	B-437	White	22.9	6.4	28.6	8.9	85.1	3	5000	B30-R4300
Fig. 1	133888	B33-5-437	B-437	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 1	133846	B33-29-437	B-437	White	31.8	9.5	33.0	12.1	69.9	2	5000	B30-R4300
Fig. 1	133889	B33-5-437YL	B-437	Yellow	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 1	133847	B33-29-437YL	B-437	Yellow	31.8	9.5	33.0	12.1	69.9	2	5000	B30-R4300
Continuous Rolls:												
Fig. 3	133980	B33C-1000-437	B-437	White	25.4	25.9m	-	-	30.5	1 roll (cont.)		B30-R4300
Fig. 3	133984	B33C-1500-437	B-437	White	38.1	25.9m	-	-	48.3	1 roll (cont.)		B30-R4300
Fig. 3	133990	B33C-2000-437	B-437	White	50.8	25.9m	-	-	55.9	1 roll (cont.)		B30-R4300
Fig. 3	133997	B33C-3000-437	B-437	White	76.2	25.9m	-	-	86.4	1 roll (cont.)		B30-R4300
Fig. 3	133981	B33C-1000-437YL	B-437	Yellow	25.4	25.9m	-	-	30.5	1 roll (cont.)		B30-R4300
Fig. 3	133985	B33C-1500-437YL	B-437	Yellow	38.1	25.9m	-	-	48.3	1 roll (cont.)		B30-R4300
Fig. 3	133991	B33C-2000-437YL	B-437	Yellow	50.8	25.9m	-	-	55.9	1 roll (cont.)		B30-R4300
Fig. 3	133998	B33C-3000-437YL	B-437	Yellow	76.2	25.9m	-	-	86.4	1 roll (cont.)		B30-R4300

▶ Also available in self-laminating format

B-437 High-Temp Adhesive Wire and Cable Labels are available in self-laminating format as a custom order. Contact Brady to order B-642 material and B30-R4300 ribbon.



Vinyl Cloth Adhesive Wire and Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- Repositionable – a highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40°C to 80°C
Agency approvals: **UL** **RoHS** **CE**




Figure 1



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 1	142875	B33-90-498	B-498	White	6.4	36.5	8.9	39.7	55.9	6	2500	B30-R6200
Fig. 1	143074	B33-68-498	B-498	White	12.7	19.1	15.2	22.2	63.5	4	5000	B30-R6200
Fig. 1	143009	B33-87-498	B-498	White	12.7	36.5	15.2	39.7	94	6	2500	B30-R6200
Fig. 1	142872	B33-1-498	B-498	White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R6200
Fig. 1	143073	B33-91-498	B-498	White	19.1	23.8	21.6	27.0	88.9	4	2500	B30-R6200
Fig. 1	142876	B33-95-498	B-498	White	20.3	36.5	22.9	39.7	71.1	3	2300	B30-R6200
Fig. 1	142966	B33-5-498	B-498	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6200
Fig. 1	142874	B33-88-498	B-498	White	25.4	19.1	27.9	22.2	58.4	2	2500	B30-R6200
Fig. 1	142967	B33-89-498	B-498	White	25.4	36.5	27.9	39.7	86.4	3	2300	B30-R6200

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. arts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

High-Temp Adhesive Wire and Cable Labels – Polyimide (B-472)

- Topcoated Polyimide label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy duty performance with excellent resistance to water, oil and other fluids

Service temp: -70°C to 160°C

Agency approvals: **RoHS**

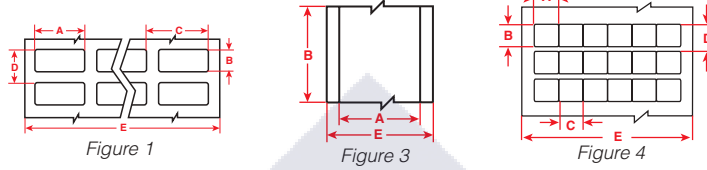


Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 4	133778	B33-11-472	B-472	White	6.4	6.4	6.4	9.5	81.3	12	15000	B30-R4300
Fig. 1	133796	B33-1-472	B-472	White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R4300
Fig. 1	133835	B33-2-472	B-472	White	22.9	6.4	28.6	8.9	85.1	3	5000	B30-R4300
Fig. 1	133890	B33-5-472	B-472	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 1	133849	B33-29-472	B-472	White	31.8	9.5	33.0	12.1	69.9	2	5000	B30-R4300
Fig. 1	133891	B33-5-472YL	B-472	Yellow	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 1	133850	B33-29-472YL	B-472	Yellow	31.8	9.5	33.0	12.1	69.9	2	5000	B30-R4300
Continuous Rolls:												
Fig. 3	133982	B33C-1000-472	B-472	White	25.4	25.9m	-	-	30.5	1 roll (cont.)		B30-R4300
Fig. 3	133986	B33C-1500-472	B-472	White	38.1	25.9m	-	-	48.3	1 roll (cont.)		B30-R4300
Fig. 3	133992	B33C-2000-472	B-472	White	50.8	25.9m	-	-	55.9	1 roll (cont.)		B30-R4300
Fig. 3	133999	B33C-3000-472	B-472	White	76.2	25.9m	-	-	86.4	1 roll (cont.)		B30-R4300
Fig. 3	133983	B33C-1000-472YL	B-472	Yellow	25.4	25.9m	-	-	30.5	1 roll (cont.)		B30-R4300
Fig. 3	133987	B33C-1500-472YL	B-472	Yellow	38.1	25.9m	-	-	48.3	1 roll (cont.)		B30-R4300
Fig. 3	133993	B33C-2000-472YL	B-472	Yellow	50.8	25.9m	-	-	55.9	1 roll (cont.)		B30-R4300
Fig. 3	134002	B33C-3000-472YL	B-472	Yellow	76.2	25.9m	-	-	86.4	1 roll (cont.)		B30-R4300

Terminal Block Adhesive Strips (B-498)

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and vinyl cloth construction gives excellent holding power and still allows for clean removal and reapplication

Service temp: -40°C to 80°C

Agency approvals: **UL RoHS CE**




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B Feet (m)	Web Width E mm	Labels Per Roll	Rec. Ribbon
Fig. 3	143064	B33C-312-498	B-498	White	7.9	25.9	25.4	1 roll (cont.)	B30-R6200
Fig. 3	143072	B33C-375-498	B-498	White	9.5	25.9	25.4	1 roll (cont.)	B30-R6200

Patch Panel Adhesive Strips (B-422)

- Continuous supply in 3 widths to make labelling patch panels and other datacomm components quick and easy
- Aggressive adhesive suitable for rough, highly textured and powder-coated surfaces as well as smooth surfaces

Service temp: -40°C to 100°C

Agency approvals: **UL RoHS CE**




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B Feet (m)	Web Width E mm	Labels Per Roll	Rec. Ribbon
Fig. 3	134003	B33C-312-422	B-422	White	7.9	25.9	25.4	1 roll (cont.)	B30-R6000
Fig. 3	134004	B33C-375-422	B-422	White	9.5	25.9	25.4	1 roll (cont.)	B30-R6000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

PermaSleeve® PS Polyolefin Wire Marking Sleeves (B-342)

Standard Military/Industrial Grade. 3:1 Shrink ratio.

- A 3:1 heat-shrinkable wire marker sleeve that fits snugly around wires
- Can be used for identification or wire protection
- Fade-resistant and flame-retardant
- Meets the following insulating and physical property specifications:
 - SAE-AS-23053/5 and SAE-AS-81531
 - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -40°C to 130°C
 (short burst max temp: 5 min at 260°C, 24 hrs at 177°C)
 Agency approvals:  

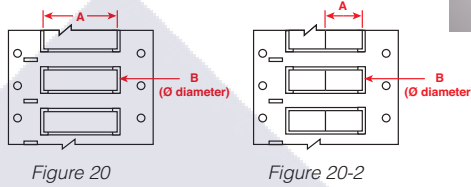



Diagram	Part No.	Catalogue No.	Material	Colour	For Wire Gauge (approx.)	Range For Wire Diameters mm	Supplied Diameter B mm	Recovered Diameter mm	Recovered Wall Thickness mm	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio single-side printable, 50mm sleeve width (dimension A):												
Fig. 20	* 142926	B33-94-2-342	B-342	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143034	B33-125-2-342	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143036	B33-187-2-342	B-342	White	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750	B30-R4300
Fig. 20	* 143038	B33-250-2-342	B-342	White	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 143039	B33-375-2-342	B-342	White	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 143040	B33-500-2-342	B-342	White	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350	B30-R4300
Fig. 20	* 143041	B33-750-2-342	B-342	White	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250	B30-R4300
Fig. 20	* 143032	B33-1000-2-342	B-342	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250	B30-R4300
Fig. 20	* 142992	B33-1500-2-342	B-342	White	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150	B30-R4300
Fig. 20	* 142932	B33-94-2-342YL	B-342	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143035	B33-125-2-342YL	B-342	Yellow	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143037	B33-187-2-342YL	B-342	Yellow	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750	B30-R4300
Fig. 20	* 142930	B33-250-2-342YL	B-342	Yellow	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 142931	B33-375-2-342YL	B-342	Yellow	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 142927	B33-500-2-342YL	B-342	Yellow	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350	B30-R4300
Fig. 20	* 142934	B33-750-2-342YL	B-342	Yellow	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250	B30-R4300
Fig. 20	* 143033	B33-1000-2-342YL	B-342	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250	B30-R4300
Fig. 20	* 142993	B33-1500-2-342YL	B-342	Yellow	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150	B30-R4300
Fig. 20	* 142991	B33-1500-2-342BK	B-342	Black	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150	B30-R4500-SV
3:1 Shrink ratio single-side printable, 25mm sleeve width in "2-up pre-cut" configuration (dimension A):												
Fig. 20-2	* 133978	B33-94-2-342-2	B-342	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	2	2000	B30-R4300
Fig. 20-2	* 133784	B33-125-2-342-2	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	2	2000	B30-R4300
Fig. 20-2	* 142944	B33-187-2-342-2	B-342	White	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	2	1500	B30-R4300
Fig. 20-2	* 142945	B33-250-2-342-2	B-342	White	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	2	1000	B30-R4300
Fig. 20-2	* 142946	B33-375-2-342-2	B-342	White	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	2	1000	B30-R4300
Fig. 20-2	* 133879	B33-500-2-342-2	B-342	White	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.07	2	700	B30-R4300
Fig. 20-2	* 141658	B33-750-2-342-2	B-342	White	6 to 4/0	6.4 - 17.8	19.1	6.35	0.6 +/- 0.07	2	500	B30-R4300
Fig. 20-2	* 133766	B33-1000-2-342-2	B-342	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	2	500	B30-R4300
Fig. 20-2	* 133808	B33-1500-2-342-2	B-342	White	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	2	150	B30-R4300
Fig. 20-2	* 133979	B33-94-2-342YL-2	B-342	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	2	2000	B30-R4300
Fig. 20-2	* 133785	B33-125-2-342YL-2	B-342	Yellow	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	2	2000	B30-R4300
Fig. 20-2	* 145570	B33-750-2-342YL-2	B-342	Yellow	6 to 4/0	6.4 - 17.8	19.1	6.35	0.6 +/- 0.07	2	500	B30-R4300
Fig. 20-2	* 133880	B33-500-2-342YL-2	B-342	Yellow	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.07	2	700	B30-R4300
Fig. 20-2	* 133767	B33-1000-2-342YL-2	B-342	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	2	500	B30-R4300
Fig. 20-2	* 133809	B33-1500-2-342YL-2	B-342	Yellow	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	2	300	B30-R4300

*  **WARNING:** Cancer www.P65Warnings.ca.gov

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

B-342 PermaSleeve® PS Polyolefin Wire Marking Sleeves (Continued)

Diagram	Part No.	Catalogue No.	Material	Colour	For Wire Gauge (approx.)	Range For Wire Diameters mm	Supplied Diameter B mm	Recovered Diameter mm	Recovered Wall Thickness mm	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):												
Fig. 20	* 143019	B33D-94-2-342	B-342	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143021	B33D-125-2-342	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 140882	B33D-125-2-342-2	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	2	2000	B30-R4300
Fig. 20	* 143023	B33D-187-2-342	B-342	White	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750	B30-R4300
Fig. 20	* 143025	B33D-250-2-342	B-342	White	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 143027	B33D-375-2-342	B-342	White	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 143029	B33D-500-2-342	B-342	White	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350	B30-R4300
Fig. 20	* 143031	B33D-750-2-342	B-342	White	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250	B30-R4300
Fig. 20	* 142937	B33D-1000-2-342	B-342	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250	B30-R4300
Fig. 20	* 142989	B33D-1500-2-342	B-342	White	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150	B30-R4300
Fig. 20	* 143020	B33D-94-2-342YL	B-342	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143022	B33D-125-2-342YL	B-342	Yellow	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000	B30-R4300
Fig. 20	* 143024	B33D-187-2-342YL	B-342	Yellow	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750	B30-R4300
Fig. 20	* 143026	B33D-250-2-342YL	B-342	Yellow	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 143028	B33D-375-2-342YL	B-342	Yellow	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500	B30-R4300
Fig. 20	* 143030	B33D-500-2-342YL	B-342	Yellow	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350	B30-R4300
Fig. 20	* 142928	B33D-750-2-342YL	B-342	Yellow	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250	B30-R4300
Fig. 20	* 142933	B33D-1000-2-342YL	B-342	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250	B30-R4300
Fig. 20	* 142990	B33D-1500-2-342YL	B-342	Yellow	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150	B30-R4300
Fig. 20	* 142935	B33D-94-2-342BK	B-342	Black	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000	B30-R4500-SV
Fig. 20	* 142921	B33D-125-2-342BK	B-342	Black	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000	B30-R4500-SV
Fig. 20	* 142923	B33D-187-2-342BK	B-342	Black	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750	B30-R4500-SV
Fig. 20	* 142924	B33D-250-2-342BK	B-342	Black	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500	B30-R4500-SV
Fig. 20	* 142922	B33D-375-2-342BK	B-342	Black	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500	B30-R4500-SV
Fig. 20	* 142925	B33D-500-2-342BK	B-342	Black	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350	B30-R4500-SV
Fig. 20	* 142929	B33D-750-2-342BK	B-342	Black	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250	B30-R4500-SV
Fig. 20	* 142869	B33D-1000-2-342BK	B-342	Black	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250	B30-R4500-SV
Fig. 20	* 142988	B33D-1500-2-342BK	B-342	Black	N/A	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150	B30-R4500-SV

* **WARNING:** Cancer www.P65Warnings.ca.gov

QuickSleeve Handheld Sleeve Applicator

The QuickSleeve Handheld Sleeve Applicator is an intuitive multi-tool designed to help you quickly apply sleeves on to wires in three simple steps – just pick, slip and apply. This tool includes:

- Four specially designed slanted tubes sized for sleeve sizes 2.4, 3.2, 4.8 and 6.4mm
- Built-in LED flashlight for use in low-lit conditions
- Terminal block sized screwdriver



Part No.	Catalogue No.	Description	Qty.
149474	QS	QuickSleeve multi-tool	1 Set



Pick

Slip

Apply

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

PermaSleeve® HT High-Temperature PVDF Wire Marking Sleeves (B-345)

High temperature, low outgassing. 2:1 Shrink ratio.

- A 2:1 shrink ratio wire marker sleeve specifically designed for high-temperature and low-vacuum outgassing applications
- Made from irradiated high-temp polyvinylidene fluoride (PVDF) heat-shrink tubing
- Fade-resistant and flame-retardant
- Meets the following industry specifications:
 - NASA SP-R-0022A Outgassing Performance
 - SAE-AS-81531
 - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -55°C to 225°C Agency approvals: **RoHS**




Figure 20



Diagram	Part No.	Catalogue No.	Material	Colour	For Wire Gauge (approx.)	Range For Wire Diameters mm	Supplied Diameter B mm	Recovered Diameter mm	Recovered Wall Thickness mm	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):												
Fig. 20	142987	B33D-94-2-345	B-345	White	26 to 20	0.8 - 2.0	2.4	0.8	0.4 +/- 0.07	1	1000	B30-R6000
Fig. 20	142986	B33D-94-2-345BK	B-345	Black	26 to 20	0.8 - 2.0	2.4	0.8	0.4 +/- 0.07	1	1000	B30-R4400-WT
2:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):												
Fig. 20	142973	B33D-125-2-345	B-345	White	20 to 16	1.6 - 2.8	3.2	1.6	0.4 +/- 0.07	1	1000	B30-R6000
Fig. 20	142977	B33D-187-2-345	B-345	White	16 to 10	2.4 - 3.8	4.7	2.4	0.4 +/- 0.07	1	750	B30-R6000
Fig. 20	142979	B33D-250-2-345	B-345	White	12 to 8	3.2 - 5.5	6.4	3.2	0.4 +/- 0.07	1	500	B30-R6000
Fig. 20	142981	B33D-375-2-345	B-345	White	8 to 4	3.2 - 8.1	9.5	4.7	0.4 +/- 0.07	1	500	B30-R6000
Fig. 20	142983	B33D-500-2-345	B-345	White	6 to 1	6.4 - 11.4	12.7	6.4	0.4 +/- 0.07	1	350	B30-R6000
Fig. 20	142985	B33D-750-2-345	B-345	White	2 to 4/0	9.5 - 17.8	19.0	9.5	0.4 +/- 0.07	1	250	B30-R6000
Fig. 20	142971	B33D-1000-2-345	B-345	White	2/0 to 0.950 dia	11.4 - 24.1	25.4	12.7	0.4 +/- 0.01	1	250	B30-R6000
Fig. 20	142975	B33D-1500-2-345	B-345	White	N/A	19.1 - 35.6	38.1	19.1	0.6 +/- 0.01	1	150	B30-R6000
Fig. 20	142972	B33D-125-2-345BK	B-345	Black	20 to 16	1.6 - 2.8	3.2	1.6	0.4 +/- 0.07	1	1000	B30-R4400-WT
Fig. 20	142976	B33D-187-2-345BK	B-345	Black	16 to 10	2.4 - 3.8	4.7	2.4	0.4 +/- 0.07	1	750	B30-R4400-WT
Fig. 20	142978	B33D-250-2-345BK	B-345	Black	12 to 8	3.2 - 5.5	6.4	3.2	0.4 +/- 0.07	1	500	B30-R4400-WT
Fig. 20	142980	B33D-375-2-345BK	B-345	Black	8 to 4	3.2 - 8.1	9.5	4.7	0.4 +/- 0.07	1	500	B30-R4400-WT
Fig. 20	142982	B33D-500-2-345BK	B-345	Black	6 to 1	6.4 - 11.4	12.7	6.4	0.4 +/- 0.07	1	350	B30-R4400-WT
Fig. 20	142984	B33D-750-2-345BK	B-345	Black	3 to 4/0	9.5 - 17.8	19.0	9.5	0.4 +/- 0.07	1	250	B30-R4400-WT
Fig. 20	142970	B33D-1000-2-345BK	B-345	Black	2/0 to 0.950 dia	11.4 - 24.1	25.4	12.7	0.4 +/- 0.01	1	250	B30-R4400-WT
Fig. 20	142974	B33D-1500-2-345BK	B-345	Black	N/A	19.1 - 35.6	38.1	19.1	0.6 +/- 0.01	1	150	B30-R4400-WT

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

PermaSleeve® HX Polyolefin Wire Marking Sleeves (B-7642)

Military/Industrial Grade. 2:1 Shrink ratio.

- Flame retardant and high-temp rated but not as high temp as B-345 "HT" sleeves
- Meets the following industry specifications:
 - SAE-AS23053/5 and SAE-AS-81531
 - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -40°C to 120°C (short burst max temp: 5 min at 240°C, 24 hrs at 160°C)
Agency approval: **RoHS**




Figure 20



Diagram	Part No.	Catalogue No.	Material	Colour	For Wire Gauge (approx.)	Range For Wire Diameters mm	Supplied Diameter B mm	Recovered Diameter mm	Recovered Wall Thickness mm	Sleeves Per Row	Per Roll	Rec. Ribbon
2:1 Shrink ratio single-side printable, 50mm sleeve width (dimension A):												
Fig. 20	142897	B33-94-2-7642	B-7642	White	24 to 20	1.2 - 2.0	2.4	1.2	0.5 +/- 0.07	1	500	B30-R4300
Fig. 20	142898	B33-125-2-7642	B-7642	White	20 to 16	1.6 - 2.8	3.2	1.6	0.5 +/- 0.07	1	500	B30-R4300
Fig. 20	142899	B33-187-2-7642	B-7642	White	16 to 10	2.4 - 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R4300
Fig. 20	142900	B33-250-2-7642	B-7642	White	12 to 8	3.2 - 5.5	6.4	3.2	0.6 +/- 0.07	1	400	B30-R4300
Fig. 20	142901	B33-375-2-7642	B-7642	White	8 to 4	4.8 - 8.1	9.5	4.8	0.6 +/- 0.07	1	250	B30-R4300
Fig. 20	142902	B33-500-2-7642	B-7642	White	6 to 1	6.4 - 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R4300
Fig. 20	142903	B33-750-2-7642	B-7642	White	2 to 4/0	9.5 - 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R4300
Fig. 20	142904	B33-1000-2-7642	B-7642	White	2/0 to 0.950 dia	11.4 - 24.1	25.4	12.7	0.9 +/- 0.01	1	150	B30-R4300
Fig. 20	142905	B33-1500-2-7642	B-7642	White	N/A	19.0 - 35.6	38.1	19.1	1.0 +/- 0.02	1	50	B30-R4300
Fig. 20	142906	B33-2000-2-7642	B-7642	White	N/A	25.4 - 48.3	50.8	25.4	1.1 +/- 0.02	1	50	B30-R4300
2:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):												
Fig. 20	142907	B33D-94-2-7642	B-7642	White	24 to 20	1.2 - 2.0	2.4	1.2	0.5 +/- 0.07	1	500	B30-R4300
Fig. 20	142908	B33D-125-2-7642	B-7642	White	20 to 16	1.6 - 2.8	3.2	1.6	0.5 +/- 0.07	1	500	B30-R4300
Fig. 20	142909	B33D-187-2-7642	B-7642	White	16 to 10	2.4 - 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R4300
Fig. 20	142910	B33D-250-2-7642	B-7642	White	12 to 8	3.2 - 5.5	6.4	3.2	0.6 +/- 0.07	1	400	B30-R4300
Fig. 20	142911	B33D-375-2-7642	B-7642	White	8 to 4	4.8 - 8.1	9.5	4.8	0.6 +/- 0.07	1	250	B30-R4300
Fig. 20	142912	B33D-500-2-7642	B-7642	White	6 to 1	6.4 - 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R4300
Fig. 20	142913	B33D-750-2-7642	B-7642	White	2 to 4/0	9.5 - 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R4300
Fig. 20	142914	B33D-1000-2-7642	B-7642	White	2/0 to 0.950 dia	11.4 - 24.1	25.4	12.7	0.9 +/- 0.01	1	150	B30-R4300
Fig. 20	142915	B33D-1500-2-7642	B-7642	White	N/A	19.0 - 35.6	38.1	19.1	1.0 +/- 0.02	1	50	B30-R4300
Fig. 20	142916	B33D-2000-2-7642	B-7642	White	N/A	25.4 - 48.3	50.8	25.4	1.1 +/- 0.02	1	50	B30-R4300

PermaSleeve® LSZH Low Smoke Zero Halogen Polyolefin Wire Marking Sleeves (B-7641)

Military/Industrial Grade. 2:1 Shrink ratio.

- Low halogen wire marking sleeves offer outstanding fire safety properties and minimal smoke emission
- Meets the following industry specifications:
 - SAE-AS-81531 and EN45545-2
 - Tested per ASTM E162, ASTM E662 and MIL-STD-202

Service temp: -30°C to 105°C Agency approval: **RoHS**




Figure 20



Diagram	Part No.	Catalogue No.	Material	Colour	Range For Wire Diameters mm	Supplied Diameter B mm	Recovered Diameter mm	Recovered Wall Thickness mm	Sleeves Per Row	Per Roll	Rec. Ribbon
2:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):											
Fig. 20	140928	B33D-94-2-7641	B-7641	White	1.2 - 2.0	2.4	1.2	0.5 +/- 0.07	1	1000	B30-R6000
Fig. 20	140929	B33D-125-2-7641	B-7641	White	1.6 - 2.8	3.2	1.6	0.5 +/- 0.07	1	1000	B30-R6000
Fig. 20	140930	B33D-187-2-7641	B-7641	White	2.4 - 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R6000
Fig. 20	140931	B33D-250-2-7641	B-7641	White	3.2 - 5.5	6.4	3.2	0.6 +/- 0.07	1	500	B30-R6000
Fig. 20	140932	B33D-375-2-7641	B-7641	White	4.8 - 8.1	9.5	4.8	0.6 +/- 0.07	1	500	B30-R6000
Fig. 20	140933	B33D-500-2-7641	B-7641	White	6.4 - 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R6000
Fig. 20	140934	B33D-750-2-7641	B-7641	White	9.5 - 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R6000
Fig. 20	140935	B33D-1000-2-7641	B-7641	White	11.4 - 24.1	25.4	12.7	0.9 +/- 0.01	1	150	B30-R6000
Fig. 20	140936	B33D-1500-2-7641	B-7641	White	19.0 - 35.6	38.1	19.1	1.0 +/- 0.02	1	50	B30-R6000
Fig. 20	140919	B33D-94-2-7641Y	B-7641	Yellow	1.2 - 2.0	2.4	1.2	0.5 +/- 0.07	1	1000	B30-R6000
Fig. 20	140920	B33D-125-2-7641Y	B-7641	Yellow	1.6 - 2.8	3.2	1.6	0.5 +/- 0.07	1	1000	B30-R6000
Fig. 20	140921	B33D-187-2-7641Y	B-7641	Yellow	2.4 - 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R6000
Fig. 20	140922	B33D-250-2-7641Y	B-7641	Yellow	3.2 - 5.5	6.4	3.2	0.6 +/- 0.07	1	500	B30-R6000
Fig. 20	140923	B33D-375-2-7641Y	B-7641	Yellow	4.8 - 8.1	9.5	4.8	0.6 +/- 0.07	1	500	B30-R6000
Fig. 20	140924	B33D-500-2-7641Y	B-7641	Yellow	6.4 - 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R6000
Fig. 20	140925	B33D-750-2-7641Y	B-7641	Yellow	9.5 - 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R6000
Fig. 20	140926	B33D-1000-2-7641Y	B-7641	Yellow	11.4 - 24.1	25.4	12.7	0.9 +/- 0.01	1	150	B30-R6000
Fig. 20	140927	B33D-1500-2-7641Y	B-7641	Yellow	19.0 - 35.6	38.1	19.1	1.0 +/- 0.02	1	50	B30-R6000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

PermaSleeve® FR Fluid Resistant Wire Marking Sleeves (B-344)

Military / Industrial Grade. 3:1 Shrink ratio.

- Designed for labelling wires in applications where they will be exposed to fuels, lubricants and harsh chemicals such as in the installation of hydrogen fuel cells in aerospace
- Resistant to harsh chemicals including JP8 Jet Fuel, Skydrol® and DOT 3 brake fluid
- Meets the following industry specifications:
 - SAE-AS23053/5
 - Tested per: ASTM E162, ASTM E662, MIL-STD-202G

Service temp: -23°C to 131°C
Agency approvals: **RoHS**




Figure 20



Diagram	Part No.	Catalogue No.	Material	Colour	For Wire Gauge (approx.)	Range For Wire Diameters mm	Supplied Diameter B mm	Recovered Diameter mm	Recovered Wall Thickness mm	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):												
Fig. 20	* 118999	B33D-94-2-344	B-344	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.1	1	1000	B30-R6600
Fig. 20	* 119010	B33D-125-2-344	B-344	White	22 to 16	1.2 - 2.8	3.1	1.2	0.5 +/- 0.1	1	1000	B30-R6600
Fig. 20	* 119021	B33D-187-2-344	B-344	White	20 to 10	1.6 - 3.81	4.8	1.6	0.5 +/- 0.1	1	750	B30-R6600
Fig. 20	* 119032	B33D-250-2-344	B-344	White	16 to 8	2.4 - 5.5	6.35	2.4	0.6 +/- 0.1	1	500	B30-R6600
Fig. 20	* 119043	B33D-375-2-344	B-344	White	12 to 4	3.2 - 8.1	9.5	3.2	0.6 +/- 0.1	1	500	B30-R6600
Fig. 20	* 119054	B33D-500-2-344	B-344	White	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.1	1	350	B30-R6600
Fig. 20	* 119065	B33D-750-2-344	B-344	White	6 to 4/0	6.4 - 17.8	19.05	6.35	0.6 +/- 0.1	1	250	B30-R6600
Fig. 20	* 139829	B33D-1000-2-344	B-344	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.1	1	250	B30-R6600
Fig. 20	* 119087	B33D-1500-2-344	B-344	White	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.1	1	150	B30-R6600
Fig. 20	* 119000	B33D-94-2-344YL	B-344	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.1	1	1000	B30-R6600
Fig. 20	* 119011	B33D-125-2-344YL	B-344	Yellow	22 to 16	1.2 - 2.8	3.1	1.2	0.5 +/- 0.1	1	1000	B30-R6600
Fig. 20	* 119022	B33D-187-2-344YL	B-344	Yellow	20 to 10	1.6 - 3.81	4.8	1.6	0.5 +/- 0.1	1	750	B30-R6600
Fig. 20	* 119033	B33D-250-2-344YL	B-344	Yellow	16 to 8	2.4 - 5.5	6.35	2.4	0.6 +/- 0.1	1	500	B30-R6600
Fig. 20	* 119044	B33D-375-2-344YL	B-344	Yellow	12 to 4	3.2 - 8.1	9.5	3.2	0.6 +/- 0.1	1	500	B30-R6600
Fig. 20	* 119055	B33D-500-2-344YL	B-344	Yellow	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.1	1	350	B30-R6600
Fig. 20	* 119066	B33D-750-2-344YL	B-344	Yellow	6 to 4/0	6.4 - 17.8	19.05	6.35	0.6 +/- 0.1	1	250	B30-R6600
Fig. 20	* 119077	B33D-1000-2-344YL	B-344	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.1	1	250	B30-R6600
Fig. 20	* 119088	B33D-1500-2-344YL	B-344	Yellow	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.1	1	150	B30-R6600
Fig. 20	* 119005	B33D-94-2-344BK	B-344	Black	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.1	1	1000	B30-R6700-WT
Fig. 20	* 119016	B33D-125-2-344BK	B-344	Black	22 to 16	1.2 - 2.8	3.1	1.2	0.5 +/- 0.1	1	1000	B30-R6700-WT
Fig. 20	* 119027	B33D-187-2-344BK	B-344	Black	20 to 10	1.6 - 3.81	4.8	1.6	0.5 +/- 0.1	1	750	B30-R6700-WT
Fig. 20	* 119038	B33D-250-2-344BK	B-344	Black	16 to 8	2.4 - 5.5	6.35	2.4	0.6 +/- 0.1	1	500	B30-R6700-WT
Fig. 20	* 119049	B33D-375-2-344BK	B-344	Black	12 to 4	3.2 - 8.1	9.5	3.2	0.6 +/- 0.1	1	500	B30-R6700-WT
Fig. 20	* 119060	B33D-500-2-344BK	B-344	Black	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.1	1	350	B30-R6700-WT
Fig. 20	* 119071	B33D-750-2-344BK	B-344	Black	6 to 4/0	6.4 - 17.8	19.05	6.35	0.6 +/- 0.1	1	250	B30-R6700-WT
Fig. 20	* 119082	B33D-1000-2-344BK	B-344	Black	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.1	1	250	B30-R6700-WT
Fig. 20	* 119093	B33D-1500-2-344BK	B-344	Black	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.1	1	150	B30-R6700-WT

* **WARNING:** Cancer www.P65Warnings.ca.gov

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolour signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME/ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured and difficult-to-adhere-to surfaces

Service temp: -40°C to 82°C
 Application temp: -18°C to 82°C
 Average outdoor durability: 8-10 years
 Agency approvals: **RoHS**




Figure 70



Diagram	B#	Material	Part No.	Header	Height A (mm)	Width B (mm)	Labels Per Roll	Rec. Ribbon
Fig. 70	B-595	Vinyl	142190		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	142191		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	872948		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	972946		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142188		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	142189		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142196		28.58	72.39	300	B30-R10000
Fig. 70	B-595	Vinyl	142195		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142197		57.15	97.79	250	B30-R10000
Fig. 70	B-595	Vinyl	142194		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	142199		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142198		57.15	97.79	250	B30-R10000

Non-Adhesive Tags (B-551)

- Non-adhesive semi-rigid card stock in pre-cut and continuous styles
- Tags are pre-cut with hole or easy to hole punch, are micro-perforated between tags to separate cleanly and some feature chamfered corners

Service temp: -40°C to 90°C
 Average outdoor durability: Up to 2 years




Figure 3




Figure 69



Diagram	Part No.	Catalogue No.	B#	Header	Tag Width A mm	Tag Height B mm	Tags Per Row	Tags Per Roll	Rec. Ribbon
Fig. 69	142223	B30-255-551-OSHADA	B-551		82.6	146.1	1	100	B30-R10000
Fig. 69	142226	B30-255-551-WHT	B-551		82.6	146.1	1	100	B30-R10000
Fig. 3	118013	B30C-2500-551-WT	B-551		63.5	15.2m	1 roll (cont.)		B30-R10000
Fig. 3	118012	B30C-3250-551-WT	B-551		82.6	15.2m	1 roll (cont.)		B30-R10000
Fig. 3	118011	B30C-4250-551-WT	B-551		107.9	15.2m	1 roll (cont.)		B30-R10000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Indoor and Outdoor Vinyl (B-595)

- For general facility and safety identification
- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to “difficult” low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)

Service temp: -40°C to 83°C
 Application temp: -18°C to 83°C
 Average outdoor durability: 8-10 years
 Agency approvals: RoHS




Figure 3



Facility and Safety Applications

- Lean / 5S Labels
- Pipe Markers
- Safety and Warning Labels
- Equipment and Panel Labels
- Arc Flash and Chemical Labels
- And more

Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	142031	B30C-500-595-WT	B-595	White	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142030	B30C-1125-595-WT	B-595	White	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142029	B30C-2250-595-WT	B-595	White	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142028	B30C-3000-595-WT	B-595	White	76.2	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142027	B30C-4000-595-WT	B-595	White	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142036	B30C-500-595-YL	B-595	Yellow	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142035	B30C-1125-595-YL	B-595	Yellow	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142034	B30C-2250-595-YL	B-595	Yellow	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142033	B30C-3000-595-YL	B-595	Yellow	76.2	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142032	B30C-4000-595-YL	B-595	Yellow	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142026	B30C-500-595-RD	B-595	Red	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142025	B30C-1125-595-RD	B-595	Red	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142024	B30C-2250-595-RD	B-595	Red	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142023	B30C-4000-595-RD	B-595	Red	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141994	B30C-500-595-BL	B-595	Blue	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141993	B30C-1125-595-BL	B-595	Blue	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141992	B30C-2250-595-BL	B-595	Blue	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141991	B30C-4000-595-BL	B-595	Blue	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142010	B30C-500-595-GN	B-595	Green	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142009	B30C-1125-595-GN	B-595	Green	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142008	B30C-2250-595-GN	B-595	Green	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142007	B30C-4000-595-GN	B-595	Green	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142018	B30C-500-595-OR	B-595	Orange	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142017	B30C-1125-595-OR	B-595	Orange	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142016	B30C-2250-595-OR	B-595	Orange	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142015	B30C-4000-595-OR	B-595	Orange	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	141990	B30C-500-595-BK	B-595	Black	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141989	B30C-1125-595-BK	B-595	Black	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141988	B30C-2250-595-BK	B-595	Black	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141987	B30C-4000-595-BK	B-595	Black	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141998	B30C-500-595-BR	B-595	Brown	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141997	B30C-1125-595-BR	B-595	Brown	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141996	B30C-2250-595-BR	B-595	Brown	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	141995	B30C-4000-595-BR	B-595	Brown	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142006	B30C-500-595-GD	B-595	Gold	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142005	B30C-1125-595-GD	B-595	Gold	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142004	B30C-2250-595-GD	B-595	Gold	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142003	B30C-4000-595-GD	B-595	Gold	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142014	B30C-500-595-GY	B-595	Grey	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142013	B30C-1125-595-GY	B-595	Grey	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142012	B30C-2250-595-GY	B-595	Grey	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142011	B30C-4000-595-GY	B-595	Grey	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142022	B30C-500-595-PL	B-595	Purple	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142021	B30C-1125-595-PL	B-595	Purple	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142020	B30C-2250-595-PL	B-595	Purple	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142019	B30C-4000-595-PL	B-595	Purple	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	142002	B30C-500-595-CL	B-595	Clear	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142001	B30C-1125-595-CL	B-595	Clear	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	142000	B30C-2250-595-CL	B-595	Clear	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	141999	B30C-4000-595-CL	B-595	Clear	101.6	30.5	1 roll (cont.)	B30-R10000

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Low-Halide Polyester (B-569)

- Low-halide content for labelling stainless steel pipes and surfaces. Applies best to very smooth surfaces and ideal for mounting to rigid panels

Service temp: -40°C to 100°C

Application temp: -18°C to 100°C

Average outdoor durability: 3-5 years




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	117989	B30C-500-569-WT	B-569	White	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117988	B30C-1125-569-WT	B-569	White	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117987	B30C-2250-569-WT	B-569	White	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117986	B30C-3000-569-WT	B-569	White	76.2	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117985	B30C-4000-569-WT	B-569	White	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117993	B30C-500-569-YL	B-569	Yellow	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117992	B30C-1125-569-YL	B-569	Yellow	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117991	B30C-2250-569-YL	B-569	Yellow	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117990	B30C-4000-569-YL	B-569	Yellow	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117976	B30C-500-569-RD	B-569	Red	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117975	B30C-1125-569-RD	B-569	Red	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117974	B30C-2250-569-RD	B-569	Red	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117973	B30C-4000-569-RD	B-569	Red	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117936	B30C-500-569-BL	B-569	Blue	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117935	B30C-1125-569-BL	B-569	Blue	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117934	B30C-2250-569-BL	B-569	Blue	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117933	B30C-4000-569-BL	B-569	Blue	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117956	B30C-500-569-LB	B-569	Light Blue	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117955	B30C-1125-569-LB	B-569	Light Blue	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117954	B30C-2250-569-LB	B-569	Light Blue	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117953	B30C-4000-569-LB	B-569	Light Blue	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117980	B30C-500-569-SB	B-569	Sky Blue	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117979	B30C-1125-569-SB	B-569	Sky Blue	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117978	B30C-2250-569-SB	B-569	Sky Blue	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117977	B30C-4000-569-SB	B-569	Sky Blue	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117948	B30C-500-569-GN	B-569	Green	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117947	B30C-1125-569-GN	B-569	Green	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117946	B30C-2250-569-GN	B-569	Green	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117945	B30C-4000-569-GN	B-569	Green	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117964	B30C-500-569-OR	B-569	Orange	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117963	B30C-1125-569-OR	B-569	Orange	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117962	B30C-2250-569-OR	B-569	Orange	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117961	B30C-4000-569-OR	B-569	Orange	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117932	B30C-500-569-BK	B-569	Black	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117931	B30C-1125-569-BK	B-569	Black	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117930	B30C-2250-569-BK	B-569	Black	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117929	B30C-4000-569-BK	B-569	Black	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117940	B30C-500-569-BR	B-569	Brown	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117939	B30C-1125-569-BR	B-569	Brown	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117938	B30C-2250-569-BR	B-569	Brown	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117937	B30C-4000-569-BR	B-569	Brown	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117960	B30C-500-569-OC	B-569	Ochre	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117959	B30C-1125-569-OC	B-569	Ochre	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117958	B30C-2250-569-OC	B-569	Ochre	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117957	B30C-4000-569-OC	B-569	Ochre	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117984	B30C-500-569-TN	B-569	Tan	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117983	B30C-1125-569-TN	B-569	Tan	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117982	B30C-2250-569-TN	B-569	Tan	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117981	B30C-4000-569-TN	B-569	Tan	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117952	B30C-500-569-GY	B-569	Grey	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117951	B30C-1125-569-GY	B-569	Grey	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117950	B30C-2250-569-GY	B-569	Grey	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117949	B30C-4000-569-GY	B-569	Grey	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117972	B30C-500-569-PL	B-569	Purple	12.7	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117971	B30C-1125-569-PL	B-569	Purple	28.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117970	B30C-2250-569-PL	B-569	Purple	57.5	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117969	B30C-4000-569-PL	B-569	Purple	101.6	30.5	1 roll (cont.)	B30-R10000-WT
Fig. 3	117968	B30C-500-569-PK	B-569	Pink	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117967	B30C-1125-569-PK	B-569	Pink	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117966	B30C-2250-569-PK	B-569	Pink	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117965	B30C-4000-569-PK	B-569	Pink	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117944	B30C-500-569-CL	B-569	Clear	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117943	B30C-1125-569-CL	B-569	Clear	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117942	B30C-2250-569-CL	B-569	Clear	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117941	B30C-4000-569-CL	B-569	Clear	101.6	30.5	1 roll (cont.)	B30-R10000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®30, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

ToughWash® Washdown Resistant Labels (B-854 and B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream

Service temp: -40°C to 110°C
Agency approvals: RoHS





Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Length B mm	Labels Per Roll	Rec. Ribbon
ToughWash Metal Detectable Material (B-854):								
Fig. 3	133119	B30C-4000-854-YL	B-854		101.06	15.2m	1 roll (cont.)	B30-R6000
Fig. 3	133120	B30C-4000-854-WT	B-854		101.06	15.2m	1 roll (cont.)	B30-R6000
Fig. 73	139804	B30-25-854-OSHADA	B-854		101.06	158.8	100	B30-R6000
ToughWash Material (B-855):								
Fig. 3	133146	B30C-1125-855-YL	B-855		28.6	15.2m	1 roll (cont.)	B30-R6000
Fig. 3	133142	B30C-2250-855-YL	B-855		57.5	15.2m	1 roll (cont.)	B30-R6000
Fig. 3	133144	B30C-4000-855-YL	B-855		101.06	15.2m	1 roll (cont.)	B30-R6000
Fig. 3	133147	B30C-1125-855-WT	B-855		28.6	15.2m	1 roll (cont.)	B30-R6000
Fig. 3	133143	B30C-2250-855-WT	B-855		57.5	15.2m	1 roll (cont.)	B30-R6000
Fig. 3	133145	B30C-4000-855-WT	B-855		101.06	15.2m	1 roll (cont.)	B30-R6000
Fig. 73		B30-25-855-OSHADA	B-855		101.06	158.8	100	B30-R6000

TOUGHWASH™ Harsh Washdown Labels

ToughWash™ washdown resistant labels can handle the pressures of high heat, harsh chemicals, high pressure sprays and multiple washdown cycles found in food and beverage processors. An ideal labelling solution for the Food & Beverage manufacturing plants.

Developed and tested by Brady material scientists using real washdown processes, these labels combine superior print durability with long lasting label constructions that won't fall apart or fall off.







All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Chemical and Solvent Resistant Polypropylene Labels (B-425, B-7425)

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

B-425: Service temp: -70°C to 100°C

B-7425: Service temp: -196°C to 120°C

Agency approvals:    

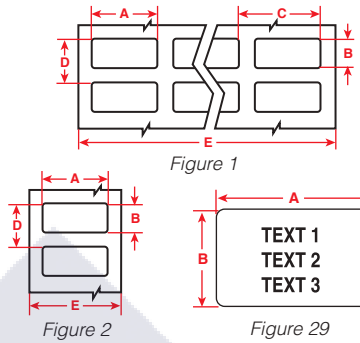


Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 1	142962	B33-5-425	B-425	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R4300
Fig. 2	142891	B33-17-425	B-425	White	50.8	25.4	—	28.6	55.9	1	1500	B30-R4300
Fig. 2	142892	B33-18-425	B-425	White	76.2	25.4	—	28.6	81.3	1	1500	B30-R4300
Fig. 2	143053	B33-19-425	B-425	White	76.2	50.8	—	54.0	81.3	1	500	B30-R4300
Fig. 29	148680	B33-88-7425	B-7425	White	25.4	19.1	—	—	—	2	2000	B30-R4300
Fig. 29	148675	B33-179-7425	B-7425	White	25.4	25.4	—	—	—	1	1500	B30-R4300
Fig. 29	148679	B33-37-7425	B-7425	White	38.1	12.7	—	—	—	2	1500	B30-R4300
Fig. 29	148676	B33-136-7425	B-7425	White	38.1	19.1	—	—	—	1	1500	B30-R4300
Fig. 29	148672	B33-235-7425	B-7425	White	38.1	25.4	—	—	—	1	1250	B30-R4300
Fig. 29	148684	B33-258-7425	B-7425	White	38.1	44.5	—	—	—	1	900	B30-R4300
Fig. 29	148674	B33-53-7425	B-7425	White	50.8	12.7	—	—	—	1	2000	B30-R4300

Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labelling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40°C to 70°C

Application temp: -18°C to 70°C (yellow and orange), 10°C to 70°C (silver)

Average outdoor durability: 4 to 6 years




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	117999	B30C-1125-584-SL	B-584	Silver	28.6	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117998	B30C-2250-584-SL	B-584	Silver	57.5	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117997	B30C-4000-584-SL	B-584	Silver	101.6	15.2	1 roll (cont.)	B30-R10000
Fig. 3	118002	B30C-1125-584-YL	B-584	Yellow	28.6	15.2	1 roll (cont.)	B30-R10000
Fig. 3	118001	B30C-2250-584-YL	B-584	Yellow	57.5	15.2	1 roll (cont.)	B30-R10000
Fig. 3	118000	B30C-4000-584-YL	B-584	Yellow	101.6	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117996	B30C-1125-584-OR	B-584	Orange	28.6	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117995	B30C-2250-584-OR	B-584	Orange	57.5	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117994	B30C-4000-584-OR	B-584	Orange	101.6	15.2	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40°C to 60°C

Application temp: 40°C to 60°C




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	117928	B30C-1125-526	B-526	Luminous Green	28.6	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117926	B30C-2250-526	B-526	Luminous Green	57.5	15.2	1 roll (cont.)	B30-R10000
Fig. 3	117924	B30C-4000-526	B-526	Luminous Green	101.6	15.2	1 roll (cont.)	B30-R10000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable, repositionable and Lean / 5S identification applications

Service temp: -18°C to 70°C
Average outdoor durability: 3 to 5 years




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	117917	B30C-2500-509-WT	B-509	White	63.5	7.62	1 roll (cont.)	B30-R10000
Fig. 3	117916	B30C-4250-509-WT	B-509	White	107.8	7.62	1 roll (cont.)	B30-R10000
Fig. 3	117919	B30C-2500-509-YL	B-509	Yellow	63.5	7.62	1 roll (cont.)	B30-R10000
Fig. 3	117918	B30C-4250-509-YL	B-509	Yellow	107.8	7.62	1 roll (cont.)	B30-R10000

Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as Lean / 5S inventory labels

Service temp: -40°C to 82°C
Application temp: 10°C to 82°C
Average outdoor durability: 5 years




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	118006	B30C-500-581-WT	B-581	White	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118005	B30C-1125-581-WT	B-581	White	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118004	B30C-2250-581-WT	B-581	White	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118003	B30C-4000-581-WT	B-581	White	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118010	B30C-500-581-YL	B-581	Yellow	12.7	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118009	B30C-1125-581-YL	B-581	Yellow	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118008	B30C-2250-581-YL	B-581	Yellow	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	118007	B30C-4000-581-YL	B-581	Yellow	101.6	30.5	1 roll (cont.)	B30-R10000

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labelling vials, tubes or general glassware, temporary asset tracking, animal housing identification, and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B mm	Labels Per Roll	Rec. Ribbon
Fig. 3	149268	B30C-1125-403-WT	B-403	White	28.575	30.5	1 (cont.)	B30-R4300
Fig. 3	149269	B30C-2250-403-WT	B-403	White	57.15	30.5	1 (cont.)	B30-R4300
Fig. 3	149270	B30C-3000-403-WT	B-403	White	76.2	30.5	1 (cont.)	B30-R4300
Fig. 3	149271	B30C-4000-403-WT	B-403	White	101.6	30.5	1 (cont.)	B30-R4300

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Pre-Printed GHS Chemical Labels (B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-colour GHS labels in one print pass
- 3 sizes of labels, each with 6 diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling

Service temp: -20°C to 82°C

Application temp: 10°C to 82°C

Average outdoor durability: 3-5 years



Part No.	Catalogue No.	B#	Material	Legend		Label Height mm	Label Width mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
121633	B30-260-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	55.0	85.0	1	340	B30-R10000
121639	B30-261-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	75.0	110.0	1	270	B30-R10000
121645	B30-262-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	105.0	155.0	1	200	B30-R10000
121634	B30-260-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	55.0	85.0	1	340	B30-R10000
121640	B30-261-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	75.0	110.0	1	270	B30-R10000
121646	B30-262-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	105.0	155.0	1	200	B30-R10000
121635	B30-260-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	55.0	85.0	1	340	B30-R10000
121641	B30-261-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	75.0	110.0	1	270	B30-R10000
121647	B30-262-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	105.0	155.0	1	200	B30-R10000
121636	B30-260-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	55.0	85.0	1	340	B30-R10000
121642	B30-261-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	75.0	110.0	1	270	B30-R10000
121648	B30-262-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	105.0	155.0	1	200	B30-R10000
121637	B30-260-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	55.0	85.0	1	340	B30-R10000
121643	B30-261-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	75.0	110.0	1	270	B30-R10000
121649	B30-262-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	105.0	155.0	1	200	B30-R10000
121638	B30-260-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	55.0	85.0	1	340	B30-R10000
121644	B30-261-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	75.0	110.0	1	270	B30-R10000
121650	B30-262-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	105.0	155.0	1	200	B30-R10000
149209	B30-18-7569-CLP4C	B-7569	Vinyl		L4C Diamond + Text	25.4	76.2	1	1000	B30-R10000



Easily create your GHS labels with Brady Workstation GHS App














- Use built-in pre-formatted label layouts with approved GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes
- No driver required when using the BradyPrinter i3300



All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

General ID Labels for Lean / 5S, Bins and Production Areas (B-483, B-484A, B-498, B-499 and B-595)

- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40°C to 120°C Agency approvals:   
B-484A: Service temp: -40°C to 116°C Agency approvals:   
B-498: Service temp: -40°C to 80°C Agency approvals:   
B-499: Service temp: -40°C to 90°C Agency approvals:   
B-595: Service temp: -40°C to 82°C, 8-10 years average outdoor durability Agency approvals: 




Figure 1




Figure 2




Figure 3





Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Vinyl Cloth - Aggressive but repositionable adhesive (B-498):												
Fig. 1	142875	B33-90-498	B-498	White	6.4	36.5	8.9	39.7	55.9	6	2500	B30-R6200
Fig. 1	143074	B33-68-498	B-498	White	12.7	19.1	15.2	22.2	63.5	4	5000	B30-R6200
Fig. 1	143009	B33-87-498	B-498	White	12.7	36.5	15.2	39.7	94.0	6	2500	B30-R6200
Fig. 1	142872	B33-1-498	B-498	White	19.1	6.4	20.3	8.9	85.1	4	5000	B30-R6200
Fig. 1	142876	B33-95-498	B-498	White	20.3	36.5	22.9	39.7	71.1	3	2300	B30-R6200
Fig. 1	142966	B33-5-498	B-498	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6200
Fig. 1	142874	B33-88-498	B-498	White	25.4	19.1	27.9	22.2	58.4	2	2500	B30-R6200
Fig. 1	142967	B33-89-498	B-498	White	25.4	36.5	27.9	39.7	86.4	3	2300	B30-R6200
Nylon Cloth - Permanent adhesive (B-499):												
Fig. 1	143018	B33-68-499	B-499	White	12.7	19.1	15.2	22.2	63.5	4	1500	B30-R6000
Fig. 1	143002	B33-165-499	B-499	White	20.3	36.5	22.9	39.7	94.0	4	2500	B30-R6000
Fig. 2	142995	B33-125-499	B-499	White	22.9	12.7	-	-	-	1	1500	B30-R6000
Fig. 1	143011	B33-126-499	B-499	White	22.9	12.7	-	-	-	2	1500	B30-R6000
Fig. 2	143001	B33-163-499	B-499	White	25.4	9.5	-	-	-	1	1500	B30-R6000
Fig. 1	143017	B33-152-499	B-499	White	25.4	9.5	-	-	-	2	1500	B30-R6000
Fig. 2	142997	B33-136-499	B-499	White	38.1	19.1	-	22.2	45.0	1	1500	B30-R6000
Fig. 2	143066	B33-137-499	B-499	White	50.8	25.4	-	28.6	55.9	1	1100	B30-R6000
Fig. 2	142995	B33-125-499	B-499	White	50.8	6.4	-	-	-	1	1500	B30-R6000
Polyester - Ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):												
Fig. 1	133806	B33-149-483	B-483	White	12.7	12.7	15.2	15.2	63.5	4	5000	B30-R6000
Fig. 1	143075	B33-5-483	B-483	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	143084	B33-17-483	B-483	White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133965	B33-7-483	B-483	White	69.9	31.8	-	34.9	74.9	1	1000	B30-R6000
Fig. 2	143079	B33-18-483	B-483	White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	142956	B33-19-483	B-483	White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Fig. 2	133897	B33-55-483	B-483	White	101.6	50.8	-	54.0	106.7	1	750	B30-R6000
Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):												
Fig. 2	133786	B33-125-484	B-484A	White	22.9	12.7	-	15.2	27.9	1	1500	B30-R6000
Fig. 1	133892	B33-5-484	B-484A	White	25.4	12.7	27.3	15.2	85.1	3	5000	B30-R6000
Fig. 2	133787	B33-136-484	B-484A	White	38.1	19.1	-	22.2	43.2	1	1500	B30-R6000
Fig. 2	133816	B33-17-484	B-484A	White	50.8	25.4	-	28.6	55.9	1	1500	B30-R6000
Fig. 2	133824	B33-18-484	B-484A	White	76.2	25.4	-	28.6	81.3	1	1500	B30-R6000
Fig. 2	133830	B33-19-484	B-484A	White	76.2	50.8	-	54.0	81.3	1	500	B30-R6000
Continuous cut-to-length vinyl - Permanent adhesive, conformable; indoor / outdoor grade (B-595*):												
Fig. 3	142031	B30C-500-595-WT	B-595	White	12.7	30.5m	-	-	17.8	1 roll (cont.)		B30-R10000
Fig. 3	142030	B30C-1125-595-WT	B-595	White	28.6	30.5m	-	-	34.9	1 roll (cont.)		B30-R10000
Fig. 3	142036	B30C-500-595-YL	B-595	Yellow	12.7	30.5m	-	-	17.8	1 roll (cont.)		B30-R10000
Fig. 3	142035	B30C-1125-595-YL	B-595	Yellow	28.6	30.5m	-	-	34.9	1 roll (cont.)		B30-R10000

* 46 additional sizes and colours available for B-595 (page 24)

All part numbers above are compatible with BradyPrinter i3300 and BBP[®]33. Parts may also be compatible with BradyPrinter S3100, BBP[®]31, BBP[®]35 and BBP[®]37 printers. Visit BradyID.com.au to confirm compatibility.

ToughStripe® Printable Floor Marking Tape (B-483 with overlamine)

- Revolutionary B-483 material has ultra-aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Each roll ships with a roll of clear overlamine which must be applied over printed label and on to appropriate surface for best performance

Service temp: -40°C to 120°F
Agency approvals:  




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	139950	B30C-1125-483WT-KT	B-483	White	28.6	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139949	B30C-2250-483WT-KT	B-483	White	57.5	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139948	B30C-3000-483WT-KT	B-483	White	76.2	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139947	B30C-4000-483WT-KT	B-483	White	101.6	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139946	B30C-1125-483YL-KT	B-483	Yellow	28.6	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139945	B30C-2250-483YL-KT	B-483	Yellow	57.5	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139944	B30C-3000-483YL-KT	B-483	Yellow	76.2	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139943	B30C-4000-483YL-KT	B-483	Yellow	101.6	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139942	B30C-1125-483RD-KT	B-483	Red	28.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139941	B30C-2250-483RD-KT	B-483	Red	57.5	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139940	B30C-4000-483RD-KT	B-483	Red	101.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139939	B30C-1125-483BL-KT	B-483	Blue	28.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139938	B30C-2250-483BL-KT	B-483	Blue	57.5	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139937	B30C-4000-483BL-KT	B-483	Blue	101.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139936	B30C-1125-483GN-KT	B-483	Green	28.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139935	B30C-2250-483GN-KT	B-483	Green	57.5	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139934	B30C-4000-483GN-KT	B-483	Green	101.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139933	B30C-1125-483BK-KT	B-483	Black	28.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139932	B30C-2250-483BK-KT	B-483	Black	57.5	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139931	B30C-4000-483BK-KT	B-483	Black	101.6	30.5	1 roll (cont.)	B30-R4400-WT
Fig. 3	139930	B30C-1125-483OR-KT	B-483	Orange	28.6	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139929	B30C-2250-483OR-KT	B-483	Orange	57.5	30.5	1 roll (cont.)	B30-R6000
Fig. 3	139928	B30C-4000-483OR-KT	B-483	Orange	101.6	30.5	1 roll (cont.)	B30-R6000

ToughStripe part numbers above are compatible with BradyPrinter i3300, BradyPrinter S3100, and BBP®35 and BBP®37 printers. ToughStripe material is not compatible with BBP®33 and BBP®31 printers.

Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -23°C and lasts in -40°C
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service temp: -40°C to 100°C
Application temp: -23°C to 100°C
Average outdoor durability: Up to 1 year




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B metres	Labels Per Roll	Rec. Ribbon
Fig. 3	117862	B30C-1125-549-WT	B-549	White	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117861	B30C-2250-549-WT	B-549	White	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117860	B30C-4000-549-WT	B-549	White	101.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117865	B30C-1125-549-YL	B-549	Yellow	28.6	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117864	B30C-2250-549-YL	B-549	Yellow	57.5	30.5	1 roll (cont.)	B30-R10000
Fig. 3	117863	B30C-4000-549-YL	B-549	Yellow	101.6	30.5	1 roll (cont.)	B30-R10000

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Cryogenic Tube and Vial Labels (B-461, B-490, B-492 and B-7425)

FreezerBondz™ labels can be applied to room temperature or already frozen samples, with a small overlap. The label remains legible and will stick to the tube during processing, even when immersed in liquid or vapor phase nitrogen and ultra-low temperature freezer storage.



- **B-461 Self-Laminating Polyester:** Ultra-thin polyester label with clear overlaminated tail that protects print and allows liquid levels to be visible
- **B-490 Polyester:** White FreezerBondz label ideal for flat frozen surfaces. Adheres to frozen tubes and vials when wrapped around itself by at least 3.2mm
- **B-492 Polyester:** FreezerBondz ultra-thin white polyester label for labelling of frosted/frozen or room temperature vials, tubes and canes. Superior chemical and abrasion resistance
- **B-7425 Polypropylene:** Ideal for labelling dry, room temperature specimen containers. Material withstands temperature ranges from -196°C to 121°C. Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene









Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Print-On Height C mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Self-Laminating Polyester (B-461):										
Fig. 15c	143012	B33-127-461	B-461	White	12.7	55.9	19.1	1	1500	B30-R4300
Fig. 15c	143014	B33-133-461	B-461	White	15.2	41.3	25.4	1	1500	B30-R4300
Fig. 14c	143046	B33-139-461	B-461	White	25.4	133.4	38.1	2	650	B30-R4300
Fig. 15c	143010	B33-123-461	B-461	White	45.7	9.5	19.1	1	1500	B30-R4300
Fig. 15c	143043	B33-122-461	B-461	White	45.7	12.7	19.1	1	1500	B30-R4300
Fig. 14c	143013	B33-276-461	B-461	White	66.7	25.4	25.4	1	1500	B30-R4300
Fig. 15c	143044	B33-134-461	B-461	White	88.9	38.1	31.8	1	1000	B30-R4300
Polyester (B-490):										
Fig. 7	143239	B33-126-490	B-490	White	22.9	12.7	12.7 dia.	1	2500	B30-R4300
Fig. 2	143893	B33-154-490	B-490	White	31.8	9.5	-	1	1500	B30-R4300
Fig. 2	143089	B33-155-490	B-490	White	41.3	15.2	-	1	1500	B30-R4300
Fig. 2	142894	B33-156-490	B-490	White	48.2	25.4	-	1	1500	B30-R4300
Fig. 2	142895	B33-157-490	B-490	White	55.9	38.1	-	1	1000	B30-R4300
Fig. 2	142896	B33-158-490	B-490	White	95.3	44.4	-	1	1100	B30-R4300
Polyester (B-492):										
Fig. 5	142918	B33-143-492	B-492	White	9.5 dia.	-	-	4	1500	B30-R6400
Fig. 7	143082	B33-182-492	B-492	White	12.7	25.4	11.17 dia	1	1500	B30-R6400
Fig. 2	143051	B33-180-492	B-492	White	22.9	25.4	-	1	1500	B30-R6400
Fig. 25a	142942	B33-152-492	B-492	White	25.4	9.5	-	2	2500	B30-R6400
Fig. 7	143000	B33-163-492	B-492	White	25.4	9.5	9.5 dia.	1	1500 sets	B30-R6400
Fig. 7	143100	B33-181-492	B-492	White	25.4	12.7	12.7 dia	1	1500 sets	B30-R6400
Fig. 2	143063	B33-59-492	B-492	White	25.4	12.7	-	1	5000	B30-R6400
Fig. 2	143067	B33-179-492	B-492	White	25.4	25.4	-	1	1900	B30-R6400
Fig. 2	142917	B33-156-492	B-492	White	48.3	25.4	-	1	1500	B30-R6400
Polypropylene (B-7425):										
Fig. 2	148677	B33-257-7425	B-7425	White	21.0	6.4	-	1	1500	B30-R4300
Fig. 25a	148681	B33-152-7425	B-7425	White	25.4	9.5	-	2	2000	B30-R4300
Fig. 2	148673	B33-59-7425	B-7425	White	25.4	12.7	-	1	2000	B30-R4300
Fig. 25a	148680	B33-88-7425	B-7425	White	25.4	19.1	-	2	2000	B30-R4300
Fig. 2	148671	B33-256-7425	B-7425	White	33.0	15.2	-	1	1500	B30-R4300
Fig. 25a	148679	B33-37-7425	B-7425	White	38.1	12.7	-	2	1500	B30-R4300

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Centrifuge and PCR Tube Labels (B-499 and B-7425)

Designed with ultra-thin material that prevents vials from jamming in centrifuges or racks, these labels withstand harsh temperatures and chemicals without falling off, fading or smearing.

- **B-499 Nylon Cloth:** Thick white nylon cloth for easy handling and conformability
- **B-7425 Polypropylene:** Moderate chemical resistance, ideal for labelling dry, room temperature specimen containers that withstand temperature ranges from -196°C to 121°C. Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

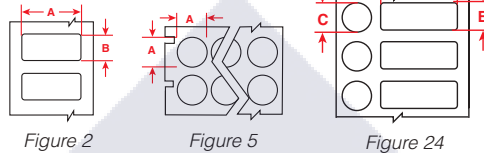


Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Vial Top Dia. C mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth (B-499):										
Fig. 5	143015	B33-143-499	B-499	White	9.5	-	-	4	1500	B30-R6000
Fig. 5	143016	B33-144-499	B-499	White	12.7	-	-	3	1500	B30-R6000
Polypropylene (B-7425):										
Fig. 2	148677	B33-257-7425	B-7425	White	21.0	6.4	-	1	1500	B30-R4300
Fig. 2	148681	B33-152-7425	B-7425	White	25.4	9.5	-	2	2000	B30-R4300
Fig. 24	148682	B33-249-7425	B-7425	White	25.4	9.5	9.5 dia.	1	1500	B30-R4300
Fig. 2	148673	B33-59-7425	B-7425	White	25.4	12.7	-	1	2000	B30-R4300
Fig. 24	148670	B33-251-7425	B-7425	White	25.4	12.7	11.1 dia.	1	1500	B30-R4300
Fig. 2	148675	B33-179-7425	B-7425	White	25.4	25.4	-	1	1500	B30-R4300
Fig. 2	148671	B33-256-7425	B-7425	White	33.0	15.2	-	1	1500	B30-R4300
Fig. 2	148679	B33-37-7425	B-7425	White	38.1	12.7	-	2	1500	B30-R4300
Fig. 2	148676	B33-136-7425	B-7425	White	38.1	19.1	-	1	1500	B30-R4300
Fig. 2	148684	B33-258-7425	B-7425	White	38.1	44.5	-	1	900	B30-R4300
Fig. 2	148683	B33-137-7425	B-7425	White	50.8	25.4	-	1	1500	B30-R4300

Microscope Slide Labels (B-481)

- Designed specifically to identify slides and to resist exposure to harsh chemicals during the slide-staining process
- Performs well in stains such as hematoxylin and eosin
- Extreme chemical resistance withstands the rigors of typical deparaffinisation, including ethanol, xylene and H&E staining processes




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 2	143055	B33-194-481	B-481	White	22.9	19.1	1	2000	B30-R6400
Fig. 25	143047	B33-141-481	B-481	White	22.9	22.9	2	1500	B30-R6400

All part numbers above are compatible with BradyPrinter i3300 and BBP@33. Parts may also be compatible with BradyPrinter S3100, BBP@31, BBP@35 and BBP@37 printers. Visit BradyID.com.au to confirm compatibility.

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labelling vials, tubes or general glassware, temporary asset tracking, animal housing identification, and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue





Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Roll Length B mm	Labels Per Roll	Rec. Ribbon
Fig. 3	149268	B30C-1125-403-WT	B-403	White	28.575	30.5	1 (cont.)	B30-R4300
Fig. 3	149269	B30C-2250-403-WT	B-403	White	57.15	30.5	1 (cont.)	B30-R4300
Fig. 3	149270	B30C-3000-403-WT	B-403	White	76.2	30.5	1 (cont.)	B30-R4300
Fig. 3	149271	B30C-4000-403-WT	B-403	White	101.6	30.5	1 (cont.)	B30-R4300

Sterilisation Indicating Labels (B-7425-AC)

- Specially designed with a pre-printed "sterilized" header that indicates steam sterilisation with a colour-changing pre-printed header when autoclaved at 121.5° C for 10 minutes
- Withstands temperature ranges from -196° C to 121° C
- For use in LN2, freezers, autoclave and hot water baths
- Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene



Note: Label dimensions include the "Sterilized" indicating area.

Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 29a	149261	B33-235-7425-AC	B-7425-AC	White	38.1	25.4 *	1	1250	B30-R4300
Fig. 29a	149262	B33-137-7425-AC	B-7425-AC	White	50.8	25.4 *	1	1500	B30-R4300

Tissue Cassette Labels (B-482)

- White polyester label with superior resistance to tissue processing chemicals and embedding procedures. Use with the BSP™31 Label Attachment system for pre-process tissue cassette ID




Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A mm	Label Height B mm	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 2	142936	B33-199-482	B-482	White	26.7	6.4	1	3000	B30-R6400
Fig. 2	143057	B33-213-482	B-482	White	26.7	8	1	3000	B30-R6400

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

General Identification for Laboratory Storage, Equipment and Safety Labels (B-499, B-595, B-7569)

- Super strong adhesives and colours ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put!

B-499: Service temp: -40°C to 90°C

B-595: Service temp: -40°C to 82°C

B-7569: Service temp: -20 °C to 75°C

Agency approvals:   

Agency approvals: 




Figure 1




Figure 2




Figure 3









Figure 70

Diagram	Part No.	Catalogue No.	B#	Colour / Legend	Label Width A mm	Label Height B mm	Horiz. Repeat C mm	Vert. Repeat D mm	Web Width E mm	Roll Length B metres	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth - Permanent adhesive (B-499):													
Fig. 1	143018	B33-68-499	B-499	White	12.7	19.1	15.2	22.2	63.5	–	4	1500	B30-R6000
Fig. 1	143002	B33-165-499	B-499	White	20.3	36.5	22.9	39.7	94.0	–	4	2500	B30-R6000
Fig. 2	142995	B33-125-499	B-499	White	22.9	12.7	–	–	–	–	1	1500	B30-R6000
Fig. 1	143011	B33-126-499	B-499	White	22.9	12.7	–	–	–	–	2	1500	B30-R6000
Fig. 2	143001	B33-163-499	B-499	White	25.4	9.5	–	–	–	–	1	1500	B30-R6000
Fig. 1	143017	B33-152-499	B-499	White	25.4	9.5	–	–	–	–	2	1500	B30-R6000
Fig. 2	142997	B33-136-499	B-499	White	38.1	19.1	–	22.2	45.0	–	1	1500	B30-R6000
Fig. 2	143066	B33-137-499	B-499	White	50.8	25.4	–	28.6	55.9	–	1	1100	B30-R6000
Fig. 2	142995	B33-125-499	B-499	White	50.8	6.4	–	–	–	–	1	1500	B30-R6000
Indoor/Outdoor Vinyl (B-595):													
Fig. 3	142031	B30C-500-595-WT	B-595	White	12.7	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000
Fig. 3	142030	B30C-1125-595-WT	B-595	White	28.6	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000
Fig. 3	142036	B30C-500-595-YL	B-595	Yellow	12.7	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000
Fig. 3	142035	B30C-1125-595-YL	B-595	Yellow	28.6	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000
Fig. 3	142026	B30C-500-595-RD	B-595	Red	12.7	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000-WT
Fig. 3	142025	B30C-1125-595-RD	B-595	Red	28.6	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000-WT
Fig. 3	141994	B30C-500-595-BL	B-595	Blue	12.7	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000-WT
Fig. 3	141993	B30C-1125-595-BL	B-595	Blue	28.6	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000-WT
Fig. 3	142010	B30C-500-595-GN	B-595	Green	12.7	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000-WT
Fig. 3	142009	B30C-1125-595-GN	B-595	Green	28.6	–	–	–	–	30.5	–	1 roll (cont.)	B30-R10000-WT
Pre-Printed Pre-Cut Blank Sign Headers (B-595):													
Fig. 70	142190	B30-241-595-OSHADA	B-595		57.5	76.2	–	–	–	–	1	300	B30-R10000
Fig. 70	142191	B30-25-595-OSHADA	B-595		101.6	152.4	–	–	–	–	1	175	B30-R10000
Pre-Printed GHS/CLP Chemical (B-7569):													
L4B	121638	B30-260-7569-CLP4B	B-7569		55.0	85.0	–	–	–	–	1	340	B30-R10000
Diamond + Text	121644	B30-261-7569-CLP4B	B-7569		75.0	110.0	–	–	–	–	1	270	B30-R10000
L4C	149209	B30-18-7569-CLP4C	B-7569		25.4	76.2	–	–	–	–	1	1000	B30-R10000
Diamond + Text													


(B-595) U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending, more parts on page 24. For more sign headers see pages 23 and 26. And for more GHS labels see page 29.

All part numbers above are compatible with BradyPrinter i3300 and BBP®33. Parts may also be compatible with BradyPrinter S3100, BBP®31, BBP®35 and BBP®37 printers. Visit BradyID.com.au to confirm compatibility.

Print ribbons

“Drop and Click” print ribbons for 5-second ribbon supply changes

- Tough, smear-proof ribbons that produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- Self-contained cartridges drop straight into printer with a “click”
- No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction!
- Printer notifies user if installed ribbon is not recommended for installed labels

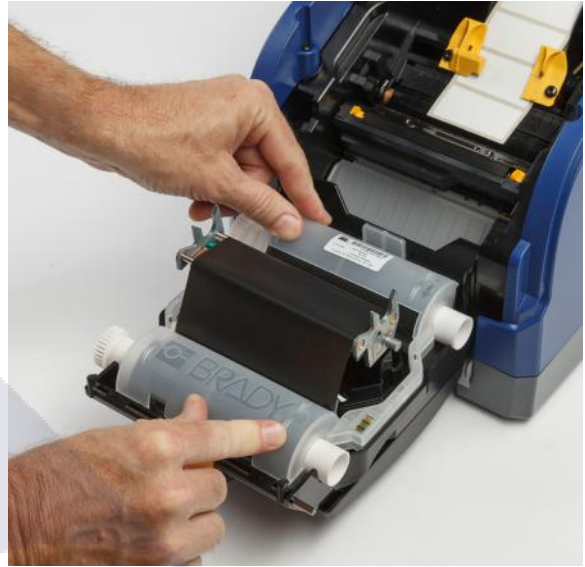

Installs in 5 seconds...just snap into place!

Single Colour Print Ribbons

Part No.	Catalogue No.	Colour	Size mm	Length Feet (m)
118084	B30-R10000	Black	109.9	60.9
118093	B30-R6000	Black	109.9	60.9
143119	B30-R6200	Black	109.9	60.9
143118	B30-R6400	Black	109.9	60.9
118095	B30-R6600	Black	109.9	60.9
118094	B30-R4300	Black	109.9	60.9
118090	B30-R10000-WT	White	109.9	60.9
118097	B30-R4400-WT	White	109.9	60.9
133357	B30-R6700-WT	White*	109.9	60.9
118923	B30-R4500-SV	Silver*	109.9	60.9
118089	B30-R10000-RD	Red	109.9	60.9
118086	B30-R10000-GN	Green	109.9	60.9
118085	B30-R10000-BL	Blue	109.9	60.9
118091	B30-R10000-YL	Yellow**	109.9	60.9
143501	B30-R10000-YL2	Yellow**	109.9	60.9
118088	B30-R10000-OR	Orange	109.9	60.9
118087	B30-R10000-MA	Magenta	109.9	60.9
140856	B30-R10000-PRCCY	Process Cyan***	109.9	60.9
140854	B30-R10000-PRCYEL	Process Yellow***	109.9	60.9
140853	B30-R10000-PRCMAG	Process Magenta***	109.9	60.9

* B30-R4500-SV ribbon for use with B-342 black sleeves only; B30-R6700-WT ribbon for use with B-345 black sleeves only.

** B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colours of B-595.

*** Process ribbons print a much lighter shade. They are designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing “blended” colours and process colour objects with the BBP35 or BBP37 printers.



Print ribbon / label material compatibility

B-# Material		B30-R4300 (Black)	B30-R6000 (Black)	B30-R6200 (Black)	B30-R6400 (Black)	B30-R6600 (Black)	B30-R10000 (Black)	B30-R4500-SV* (Silver)	B30-R4400-WT (White)	B30-R6700-WT* (White)	B30-R10000-WT (White)	B30-R10000-YL (Yellow)	B30-R10000-YL2 (Yellow)	B30-R10000 (Colours)
B-342	Polyolefin	●	-	-	-	-	-	●	-	-	-	-	-	-
B-344	Polyolefin	-	-	-	-	●	-	-	-	●	-	-	-	-
B-345	Polyolefin	-	●	-	-	-	-	-	●	-	-	-	-	-
B-403	Paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-422	Polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-423	Glossy White Polyester	-	●	●	-	-	-	-	-	-	-	-	-	-
B-424	Matte White Paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-425	Polypropylene	●	-	-	●	-	-	-	-	-	-	-	-	-
B-427	Vinyl	●	-	-	-	-	-	-	-	-	-	-	-	-
B-428	Metallised Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-430	Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-432	Glossy Clear Polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-434	Glossy Metallised Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-437	Polyvinylfluoride	●	-	-	-	-	-	-	-	-	-	-	-	-
B-438	Tamper Evident Metallised Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-461	Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-472	Polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-481	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-482	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-483	Glossy White Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-483	ToughStripe® Printable Floor Marking Tape	-	●	-	-	-	-	-	●	-	-	-	-	-
B-484A	Glossy White Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-486	Matte Metallised Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-489	Matte White Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-490	Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-492	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-498	Cloth	-	-	●	-	-	-	-	-	-	-	-	-	-
B-499	Nylon	●	●	-	-	-	-	-	-	-	-	-	-	-
B-509	Printable Magnetic	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-526	Photoluminescent Polyester	-	-	-	-	-	●	-	-	-	-	-	-	●***
B-549	Cold Temperature Polyester	-	-	-	-	-	●	-	-	●	-	-	-	●**
B-551	Non-Adhesive Tag	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-565	Metallised Polyester	-	-	-	-	-	●	-	-	-	-	-	-	-
B-569	Low-Halide Polyester	-	-	-	-	-	●	-	-	●	-	-	-	●**
B-581	Repositionable Vinyl	-	-	-	-	-	●	-	-	●	-	-	-	●**
B-584	Retro Reflective	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-593	Raised Panel	-	●	-	-	-	-	-	●	-	-	-	-	-
B-595	Outdoor Vinyl	-	-	-	-	-	●	-	-	-	●	●***	●***	●**
B-717	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-718	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-719	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-724	Matte Amber Polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-727	Glossy White Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-854	ToughWash® Metal Detectable	-	●	-	-	-	-	-	-	-	-	-	-	-
B-855	ToughWash	-	●	-	-	-	-	-	-	-	-	-	-	-
B-7425	Polypropylene	-	-	-	●	-	-	-	-	-	-	-	-	-
B-7425-AC	Polypropylene	-	-	-	●	-	-	-	-	-	-	-	-	-
B-7569	Vinyl Film	-	-	-	-	-	●	-	-	-	-	-	-	-
B-7641	Polyolefin	●	●	-	-	●	-	-	-	-	-	-	-	-
B-7642	Polyolefin	●	-	-	●	-	-	-	-	-	-	-	-	-
B-7643	Polyurethane	-	●	-	-	-	-	●	-	-	-	-	-	-

Refer to the corresponding B-number Tech Data Sheet for complete material information at BradyID.com.au/techdata.

* B30-R4500-SV ribbon for use with B-342 black sleeves only; B30-R6700-WT ribbon for use with B-345 black sleeves only.

** Coloured ribbons optimised for use on white material. Test use on other material colours for suitability to your application.

*** Use B30-R10000-YL for printing yellow onto white. Use B30-R10000-YL2 for printing yellow onto other colours of B-595.

Software for easier label creation

Innovation is at the core of our business. And software is no exception. Our intuitive software options make label creation even easier and more efficient. When you pair the BradyPrinter i3300 Industrial Label Printer with these software options, you get automatic label setup and guidance through the label creation process to minimise errors and make label creation a snap.



Brady Workstation Label Creation Software

Brady Workstation revolutionises label and sign creation and printing by offering a variety of suites and apps that are easy and efficient to use. Choose and customise the tools you use to complete tasks exactly as you want without having to use print drivers. Try these software options:



Product and Wire Identification Suite (included) – When you need to create product labels, wire and cable markers, and panel labels this suite is your go-to solution. It allows you to create basic text labels or labels with graphics and custom formatting and serialise and import data. The 'PWID' Suite is also the recommended "equivalent" to Labelmark Software.



Safety and Facility Identification Suite (included) – Keep your facility safe and compliant with the Safety and Facility Identification Suite. This group of apps makes it easy to create custom signs, labels, pipemarkers, Lean / 5S labels and outdoor-grade facility labels. Choose this suite to add visual safety guidance to your facility. The 'SFID' Suite is also the recommended "equivalent" to Markware Software.



Scan and Print Suite (149445 - sold separately) – This suite allows you to consume data from a barcode scanner, keyboard or custom script to quickly populate your own custom label templates as part of a labelling workflow. Whether you need to replicate labels for lab specimens, re-label supplied parts for product assembly or label products based off work orders, this software suite can solve your workflow needs.



Laboratory Identification Suite (150498 - sold separately) – Ensure labels for all your lab samples and equipment are crisp, clear and contain all necessary information. Easily design and create labels for your cryovials, centrifuge tubes and bottles, conicals, slides and other samples in your laboratory.



GHS Labels App (145449 - sold separately) – Creating GHS labels is now surprisingly simple. We've streamlined the process so you can easily enter the data once from your SDS sheets, then create and print any size GHS label at any time. You can also auto-populate your GHS label using the built-in chemical database. Need labels with multiple languages? Those are also supported in the app.

Other apps and suites are available:



1. Go to **Workstation.BradyID.com.au**.



2. Place your Apps/ Suite order with Brady AU Customer Service team .

For more information on Brady Workstation apps and suites, go to Workstation.BradyID.com.au.

Printer specifications

Model(s):	
Model name	i3300 Industrial Label Printer
Media alignment	Center justified
User Interface:	
Display type	Touchscreen colour LCD
Display size (diagonal)	88.90 mm
Display resolution (h x w)	240 x 320 pixels
Display languages	Bulgarian, Chinese (simplified), Chinese (traditional), Croatian, Czech, Danish, Dutch, English, Estonian, Finnish, French (Canadian), French, German, Hungarian, Italian, Korean, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Slovakian, Slovenian, Spanish (Iberian), Spanish (Latin America), Swedish, Thai, Turkish
Display status bar	Ribbon and label part number installed, amount of supplies remaining, Wi-Fi connection, Ethernet connection, receiving data icon, ready state/error state,
Print Head / Printing Characteristics:	
Print resolution	300 dpi
Print method	Thermal transfer
Print colour capability	Single print colour
Print speed	Up to 101.60 mm/sec.
Print width (max, cross-web)	101.98 mm
Print length (max, down-web)	1.52 m
Media cut-off	Auto cutter built in (all models)
Media Characteristics:	
Intelligent printing capability	Yes - reads datachip on supplies for no waste printing and auto label setup in software
Media loading/handling	Labels: In cartridge, drops into place, 15 sec. changeover Ribbon: In cartridge, snaps into place, 5 sec. changeover
Media width (cross-web incl liner)	18.03 to 107.95 mm
Label width (cross-web)	6.35 mm to 107.95 mm continuous liner-less media 6.35 mm to 101.98 mm other media
Label length (down-web)	6.35 mm min. die cut media 12.7 mm min. continuous media
Media thickness**	0.06 mm to 0.78 mm label media 1.77 mm B-593 push button media 1.09 mm heat shrink sleeves
Media roll OD (max)	109.22 mm when specifying a custom part
Media roll core ID	n/a (media integrated in cartridge roll)
Media roll winding	n/a (media integrated in cartridge roll)
Media styles	All media are on an integrated cartridge roll with part data on smart cell. Die cut media, continuous media, tagstock liner-mounted, tagstock linerless, perforated materials, adhesive labels, heat-shrink sleeves size 094 and larger (single and double-sided with 2-pass print), self-laminating cable labels, zip-tie cable tags, raised panel push button labels, rapido-style cable tags, Permashield style labels, pre-printed GHS labels, safety and facility identification outdoor grade labels
Media material types	PE (polyethylene), PET (polyester), PET Metallised, PU (polyurethane), PVC (vinyl), PVF (polyvinyl fluoride), PVDF (polyvinylidene fluoride), PP (polypropylene), PI (polyimide), Polyamide, Polyether Polyurethane (Heatex™), Raised Panel Push Button material, Paper, Destructible materials, Tamper-Evident and Tamper-Resistant materials, 8-10 year Outdoor Vinyl, 10-hour Glow-in-the-Dark material, Retroreflective labels, Printable Floor Marking Tape, Nylon and Vinyl cloth, Wash-Down materials, Extreme Temperature Laboratory materials, labels for lab staining (slides), other materials not listed
Media parts offering	800+ stock parts and custom (made-to-spec) parts
Ribbon Characteristics:	
Ribbon length (max)	60.96 m
Ribbon roll o.d. (max)	n/a (ribbon integrated in cartridge)
Ribbon roll core i.d.	n/a (ribbon integrated in cartridge)
Ribbon width (cross-web)***	109.98 mm
Ink side	n/a (ribbon integrated in cartridge—guaranteed correct orientation to print head)
Electronics:	
Processor	32 bit 800 MHz clock rate

Memory (RAM)	512 MB
Data storage (lffs)	195 MB
SD card slot (SDHC, SDXC)	n/a
Internal battery	For internal date and time (RTC)
Data storage when power off	Yes
Physical / Operational Characteristics:	
Dimensions (closed) (h x w x d)	241.30 mm x 228.60 mm x 304.80 mm
Weight (empty)	5.2kg
Power supply	101 to 240V AC, 50/60 Hz
Power consumption	<10W standby / 70W operating / 480W max
Operating environment	10 to 40° C / 10 - 85% RH non condensing
Storage environment	-20 to 50° C / 15 - 90% RH non condensing
Transport environment	-20 to 50° C / 15 - 90% RH non condensing
Agency approvals	CE, FCC class A, cUL, Contact Brady for up-to-date list of environmental compliance information and agency approvals and/or marks covering over 75 countries (awarded or applied for)
Fonts and Graphics:	
Font types (resident)	Arial, Courier New, Times New Roman, Trebuchet MS, Verdana, Tahoma
Font types (storable to printer)	TrueType fonts storable to printer via jump drive
Font attributes	Bold, italic, underlined
Character sets	ASCII character set
Graphic elements	Arrow, line, rectangle, square, circle, ellipse, diamond, dot, star, triangle, seal, and cross
Graphic formats	BMP, GIF, JPEG, PNG
Barcodes:	
Barcode symbologies - linear	Code 39, Code 93, Code 128 A, B, C, EAN-8, EAN-13, EAN/JAN 13, JAN-8, JAN-13, HIBC, Interleaved 2 of 5, Interleaved 2 of 5 w check digit, UPC A, Aztec, QR Code, datamatrix
Barcode symbologies - 2D	Aztec, QR Code, pdf 417
Barcode attributes	Sizing: variable in height and ratio Rotation: 0°, 90°, 180°, 270° human-readable and human-readable location density
Interfaces and Connectivity:	
USB 2.0 hi-speed device port	For PC connect
2 x USB host (back panel)	For scanner, keyboard, USB memory stick
1 x Ethernet 100 BASE-T	For networking
Wireless	Factory installed Wi-Fi 802.11b/g/n (wireless printer model only)
Software and Firmware:	
Label creation software	Brady Workstation (v4.4 or newer) & Workstation apps
WHQL certified Windows® drivers****	Windows 7, 8, 8.1, 10, Server 2008, 2008 R2, 2012, 2012 R2, 2017
Printer command language	BPL - scripting commands for sending scripts to the printer
Options / Accessories:	
Replacement print heads	Factory replaceable via Brady tech repair
Replacement print rollers***	115 mm width, factory replaceable via Brady tech repair if worn
Auto cutter	Built-in auto cutter (on all models)

** User should test the media with the application. Print performance on small labels or a part that is below the minimum label dimension spec. is dependent on multiple factors, including print speed, quantity in print run, heat setting and the size/layout of the printed elements.

*** Use narrow print roller with narrow media, but to avoid head damage, ALWAYS be sure roller is wider than total media width, and ribbon is wider than the roller width.

**** Windows® is a registered trademark of Microsoft Corporation.



**We identify and protect premises,
products and people.**

For more information or to learn more about our innovative products, visit BradyID.com.au or call 1800 620 816.

Brady Australia
Customer Service: 1800 620 816
BradyID.com.au