

SKU 123000-06

GPI RP-10-UL Rotary Hand Fuel Pump

A self priming rotary hand pump for direct mounting on a tank with a 2 inch bung, delivering up to 38 L per 100 revolutions. For petrol up to E15, diesel up to B20, kerosene and oils up to medium weight. UL listed.


38 L

Per 100 revolutions (10 US gal)

E15 / B20

Petrol and diesel blend limits

2 inch

Tank bung mounting

Key features

- Built in anti-siphon vent prevents tank siphoning
- Handle secures with a standard padlock
- Die cast aluminium housing, stainless steel shaft, nitrile seals
- Cast iron rotor with carbon vanes
- 2.4 m statically grounded Buna-N hose and aluminium nozzle
- Plastic suction pipe adjusts from 55 to 102 cm



Technical data


SPECIFICATION	VALUE
Part number	123000-06
Model	RP-10-UL
Pumping capacity	Up to 38 L (10 US gal) per 100 revolutions
Fluids	Petrol to E15, diesel to B20, kerosene, oils to medium weight
Inlet	1 inch NPT female
Outlet	3/4 inch NPT female
Mounting	2 inch bung, 2 inch NPT pipe nipple riser
Housing	Die cast aluminium
Rotor / vanes	Cast iron / carbon
Shaft / seals	Stainless steel / nitrile
Hose	3/4 inch x 2.4 m Buna-N, statically grounded
Nozzle	Aluminium alloy, unleaded
Suction pipe	Plastic, adjustable 55 to 102 cm
Listing	UL listed

Installation and use

Mounts on a tank with a 2 inch bung. Wrap all threads exposed to liquid with 3 to 4 turns of thread tape or a fuel approved sealant, and do not use with chemicals.



Dimensions

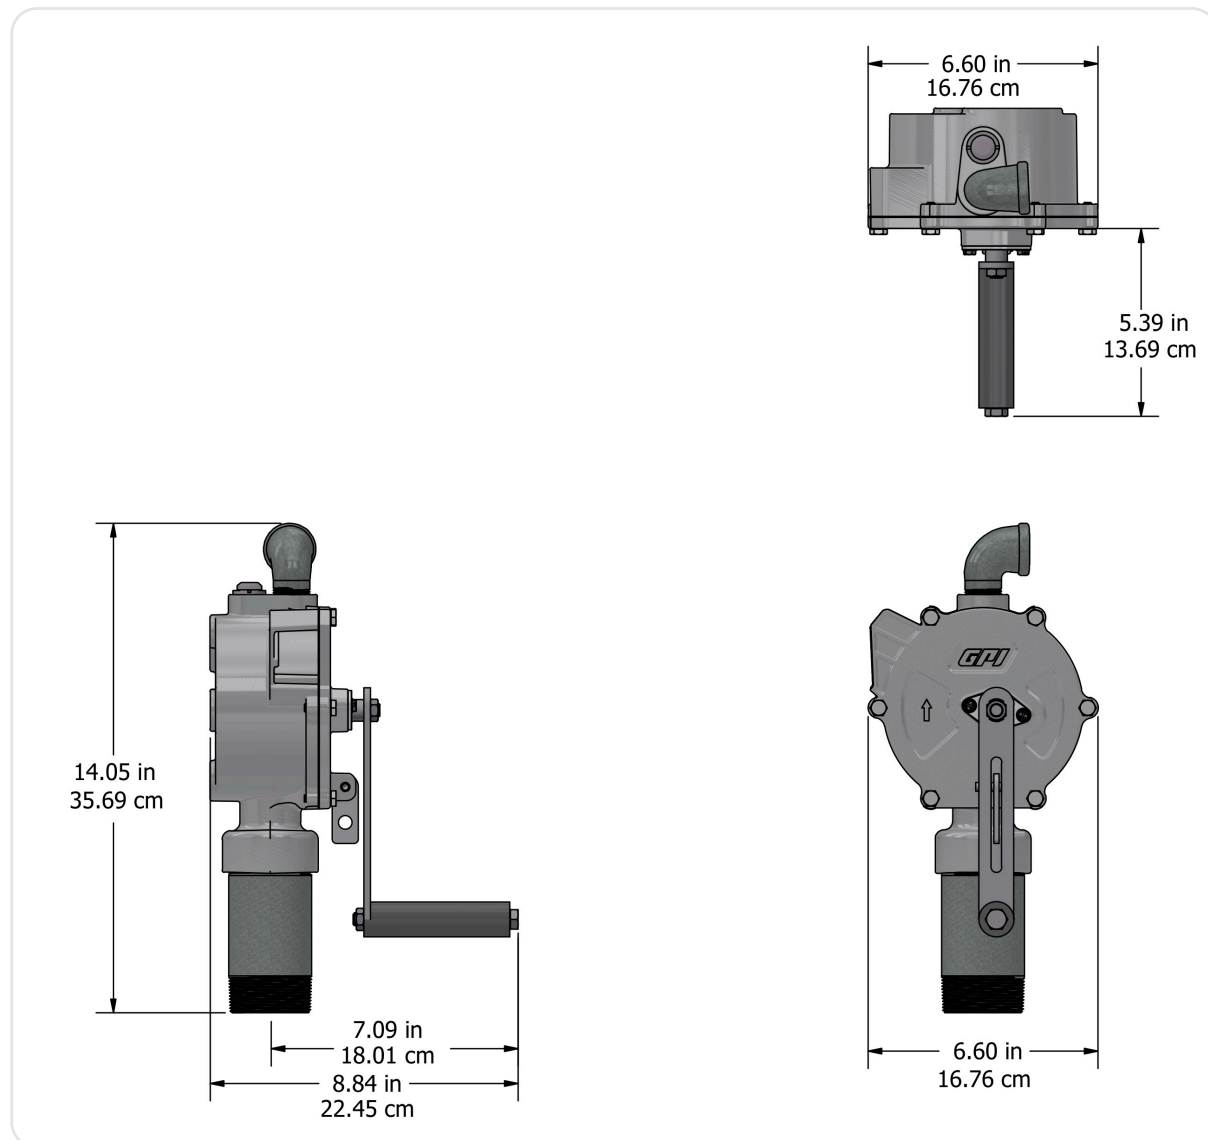

Dimensions in inches and cm, as drawn by the manufacturer for the RP-10.