

SKU DETP0855

GO Fill Elephant 230V Diesel Transfer Pump

Automatic priming 6 vane electric pump for diesel, driven by a 2237 W (3 hp) 230V 50 Hz motor at 1400 rpm. Aluminium body with cast iron rotor insert, 2" BSP female flanged ports, 130 µm filter and by-pass built in.

**191 L/min**

At 1 bar

4 bar

Maximum pressure

230V 50 Hz

2237 W (3 hp) motor

Key features

- 6 vane rotor, automatic priming
- Aluminium pump body, cast iron rotor insert
- Integrated 130 µm filter and by-pass
- Bleeder valve and anti-flood protection
- 6 bar NBR mechanical seal
- 2" BSP female flanged inlet and outlet




Technical data

SPECIFICATION	VALUE
Order code	DETP0855
Flow rate	191 L/min at 1 bar
Max pressure	4 bar
Supply	230V 50 Hz
Motor power	2237 W (3 hp)
Current	11.7 A
Speed	1400 rpm
Motor frame	100L MEC
Inlet / outlet	2" BSP (F), flanged
Suction lift	3 m
Filter	130 µm, integrated
Seal	6 bar mechanical seal, NBR
Compatible liquid	Diesel




Performance

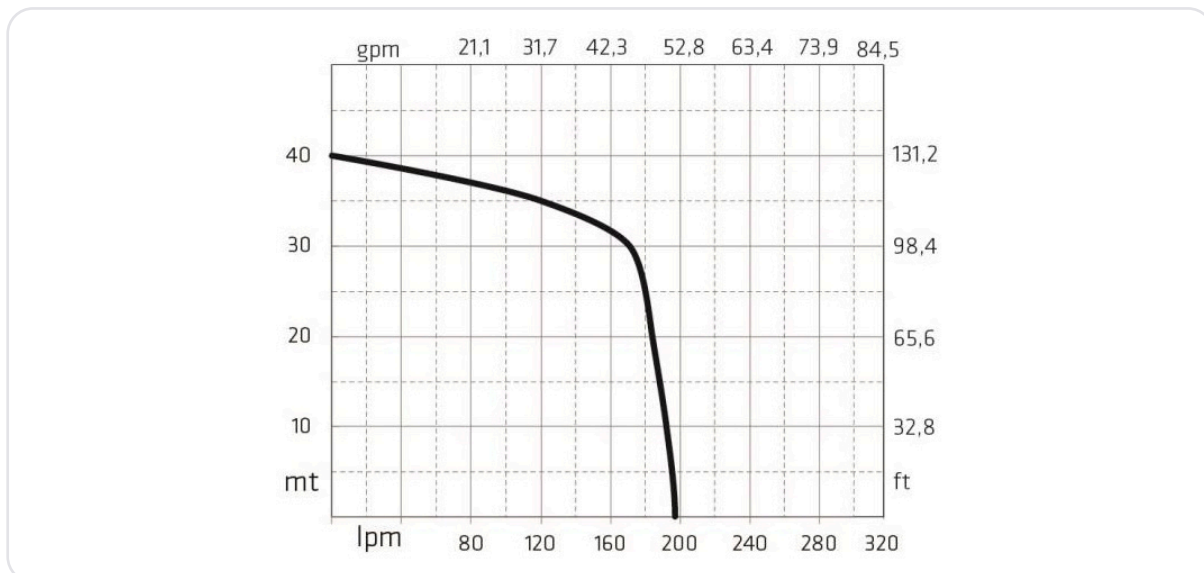

Flow (L/min) against head (m), DETP0855

Dimensions

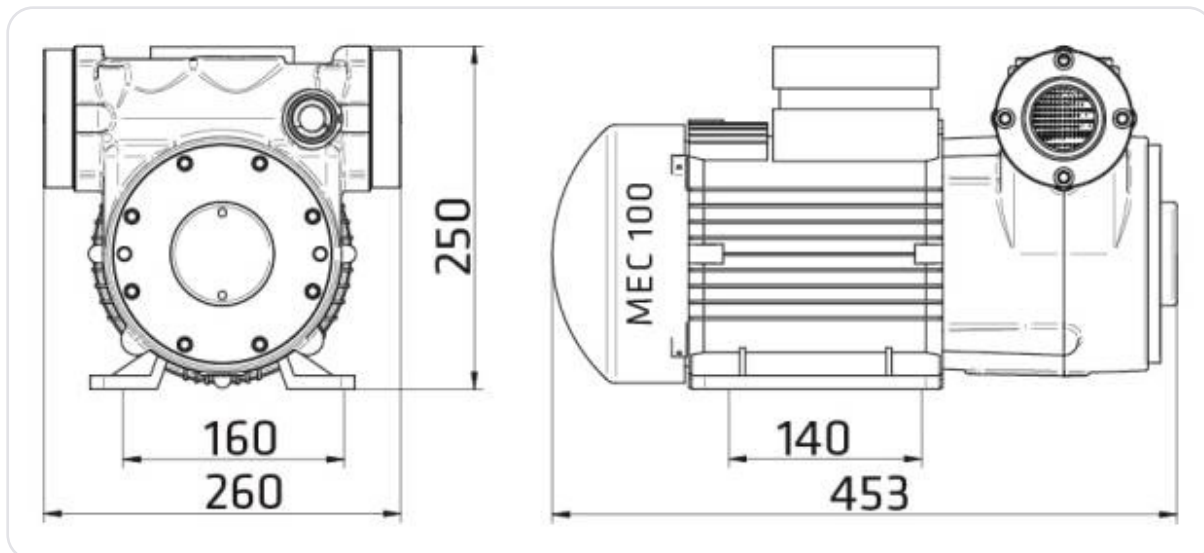

Elephant series drawing as published by the maker, which states no unit