

SKU F0040700A

PIUSI K24 Digital Diesel Meter, M/M 1" BSP

Turbine digital meter designed for diesel, male 1" BSP both ends. LCD display with flow rate indication, 7 to 120 L/min, 10 bar, batteries included.


7 to 120 L/min

Flow rate, diesel

±1%

Accuracy as stated by PIUSI, no test condition given

1" BSP

Male inlet and outlet

Key features

- Turbine meter with LCD and flow rate indication
- Rotatable display, bi-directional install
- Fits in-line or at the end of a delivery pipe
- Easy to calibrate
- 2 x AAA 1.5 V batteries included



Technical data

SPECIFICATION	VALUE
Order codes	F0040700A
Flow range	7 to 120 L/min
Accuracy	±1% (no test condition stated)
Repeatability	0.2%
Max operating pressure	10 bar (150 psi)
Connections	Male 1" BSP inlet and outlet
Fluid	Diesel
Display	LCD with flow rate indication, rotatable
Power	2 x AAA 1.5 V batteries, included
Measuring system	Turbine, bi-directional

In the box


K24 meter and instruction manual.

Installation and use

PIUSI offers NPTF threads and a gallon display on request.




Performance

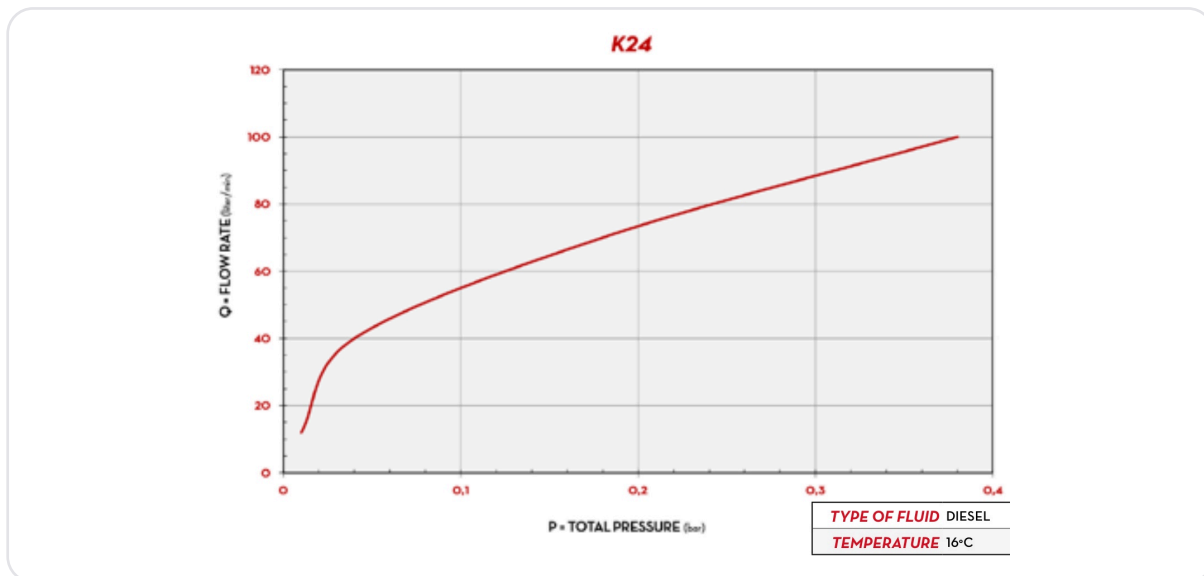

PIUSI K24 curve, flow rate against total pressure, on diesel at 16°C.

Dimensions

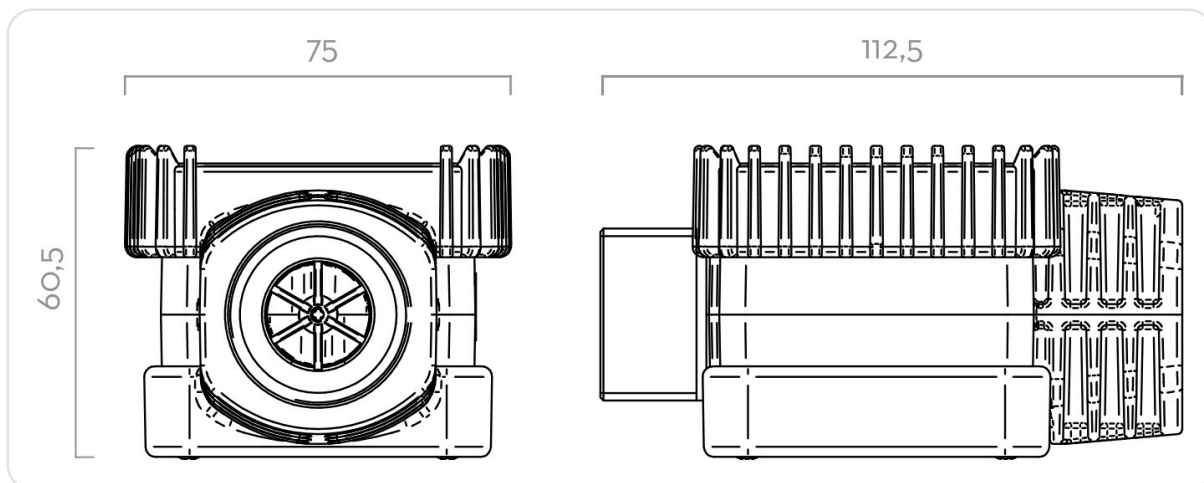

Dimensions in mm.