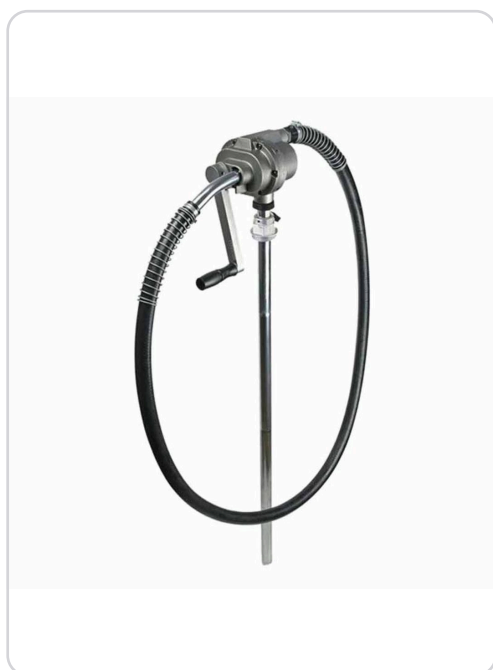


SKU GT-01

MACNAUGHT GT-01 Rapidflo Rotary Hand Fuel Pump

A geared rotary hand pump for diesel, petrol, kerosene and light oils to SAE 30, delivering about 0.8 L per revolution and up to 100 L/min depending on viscosity. Suits 60 to 205 L drums with its 2 inch sliding bung adaptor.


100 L/min

Maximum flow, depending on viscosity

0.8 L/rev

Output per revolution, approx.

2.4 m

Anti-static rubber delivery hose

Key features

- Impeller pump with a gearbox for high output and easy turning
- Rotary action delivers fluid in both directions
- Lockable handle takes a 6 mm shackle padlock, not supplied
- Anti-kink springs and a nozzle holder against spillage
- Three piece suction tube adjusts to different drum heights
- 180 micron mesh strainer on the suction side



Technical data

SPECIFICATION	VALUE
Order code	GT-01
Flow rate	Up to 100 L/min, depending on viscosity
Output per revolution	0.8 L approx.
Fluids	Diesel, petrol, kerosene, light oils to SAE 30
Maximum viscosity	SAE 30 at 20 °C
Maximum suction head	2 m
Maximum discharge	4 m
Delivery hose	2.4 m anti-static rubber
Bung adaptor	2 inch sliding
Suction tube	Three piece, adjustable
Drum size	60 to 205 L
Strainer	180 micron mesh, suction side
Wetted components	Aluminium, steel, zinc, nitrile rubber, Viton
Mass	6.5 kg approx.
Warranty	10 years (Macnaught)

In the box

GT RAPIDFLO pump, 2.4 m anti-static rubber delivery hose, three piece suction tube, built in 2 inch sliding bung adaptor and instruction manual.

Installation and use

Pump only in well ventilated areas, use metal tanks and drums grounded to earth, and fit a strainer to the nozzle if pumping in reverse. Aviation fuel users must check material compatibility first.

