

GLC X Wiring Harness

3A7046A

EN

Wiring harness for connecting a GLC X Controller to an automatic lubrication system. For professional use only.

Part No. 26A882

(Power 10 foot length, Signal 20 foot length)



Important Safety Instructions

For complete warnings and instructions refer to the GLC X Lubrication Controller instruction manual.

Related Manuals

3A7031- GLC X Lubrication Controller




Connections

Table 1: GLC X Controller Wiring Harness Kit P/N 26A882

Cable	PIN	AWG	Color	Function
Signal	1	16	Red	Pump/Motor
Signal	2	18	White	Auxiliary/Alarm
Signal	3	16	Black	GND
Signal	4	18	Yellow	Sensor Power 1
Signal	5	18	Orange	Sensor Power 2
Power	6	16	White	Voltage Source
Signal	7	18	Black	GND
Signal	8	18	Green	GND
Signal	9	18	Brown	Input 2 (Low Level)
Power	10	16	Black	Voltage Source Ground
Signal	11	18	Slate	Input 3 (Cycle)
Signal	12	18	Violet	Input 4 (Machine Count)
Signal	13	18	Green	GND
Signal	14	18	Blue	Input 1 (Pressure)

Note: Signal wires are marked with GLC X pin numbers.

Wire Entry View
TE 776273-1 (Ampseal)

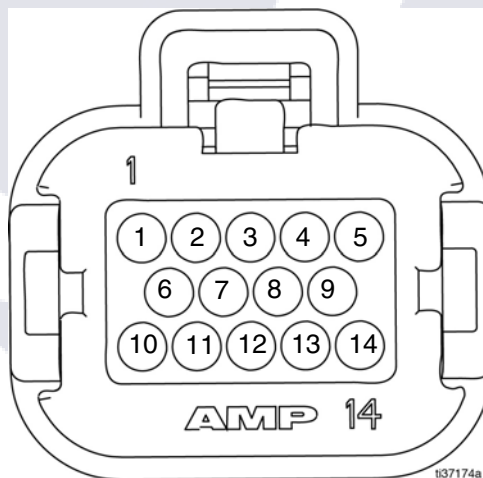

Graco Information

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact

Phone: 612-623-6928 or Toll Free: 1-800-533-9655, Fax: 612-378-3590

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

Original instructions. This manual contains English. MM 3A7046

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA
Copyright 2019, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com
Revision A, October 2019