



Merkur[®]

High Performance Fine Finish Packages

Precise pressure and output in a variety of configurations
delivers long lasting superior performance

PROVEN QUALITY. LEADING TECHNOLOGY.

Advanced Technology. Superior Performance.

The Merkur® spray packages are designed to outperform and outlast other pumps in their class. With a variety of models and configurations to choose from, you get the precise pressure and output you need for all of your finishing applications.



Air Motor

- Highest technology air motor on the market
- Low air consumption for increased efficiency
- Muffler provides low operating noise levels
- External valve access allows for easy servicing and online replacement to minimize downtime

Operator Control Panel

- Air controls located at operator height for easy setting and monitoring

Throat Seal and Rod Enclosure

- Protects pumped material and wet cup from contamination but can be easily removed to monitor and service




DataTrak™

Monitor and protect your pump with our patented DataTrak which integrates local monitoring systems!

- Easy to set runaway protection, where you set the cycle rate limit
- Pump diagnostics help advise when to maintain the pump
- Resettable batch counter tracks material usage and maintenance schedule

Pump Lower

- Easy-to-flush design allows for fast color changes and reduced solvent usage
- 300 Series stainless steel pump construction provides long-lasting durability
- Designed for improved serviceability with fewer parts and lower cost of ownership

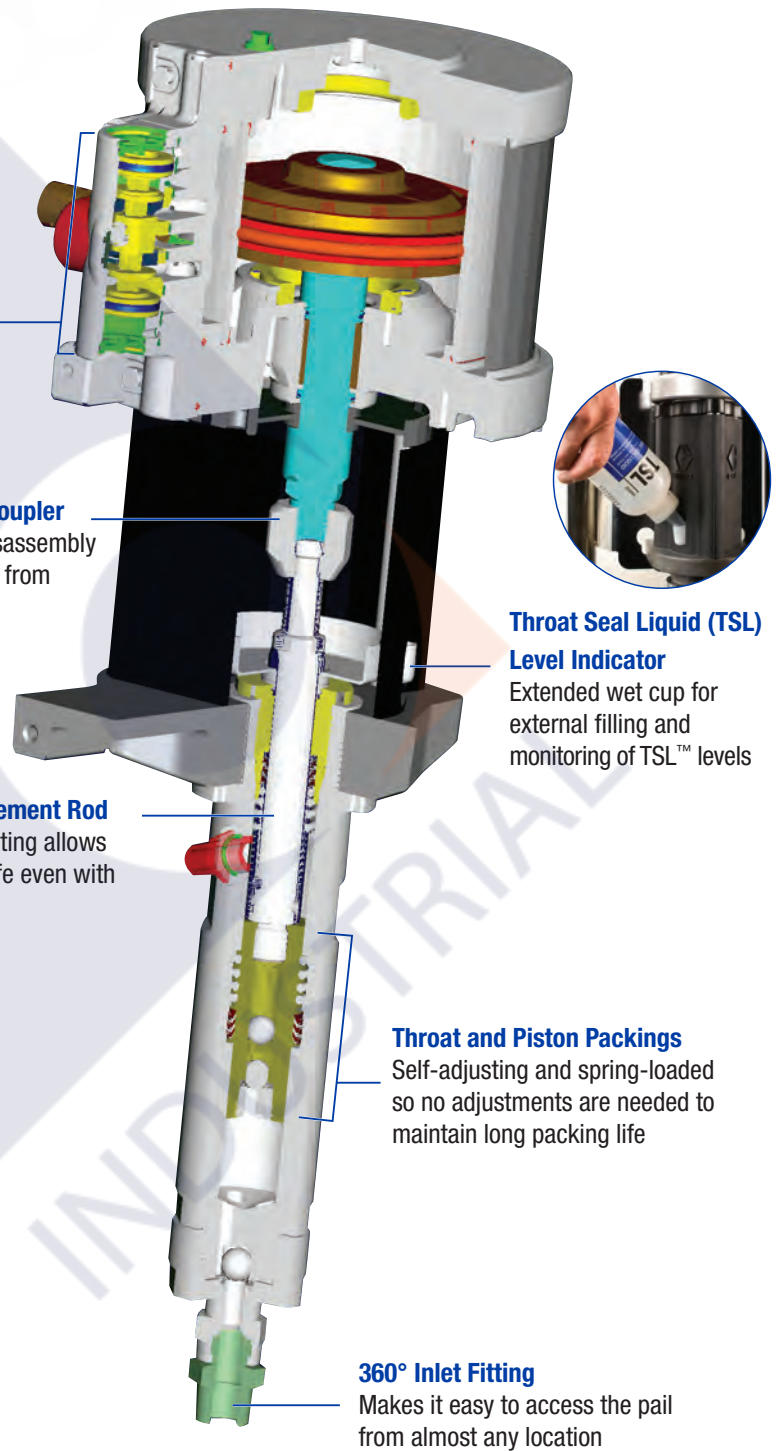

Air Valve
Provides smooth and rapid changeover

Quick Removal Coupler
Allows for easy disassembly of the pump lower from the air motor

Piston and Displacement Rod
Ultralife ceramic coating allows protection for long life even with abrasive materials


Throat Seal Liquid (TSL) Level Indicator
Extended wet cup for external filling and monitoring of TSL™ levels

Throat and Piston Packings
Self-adjusting and spring-loaded so no adjustments are needed to maintain long packing life

360° Inlet Fitting
Makes it easy to access the pail from almost any location



Less Pulsation for Better Results

Merkur is designed to provide a smooth, rapid changeover for a better, more consistent finish and less user fatigue.

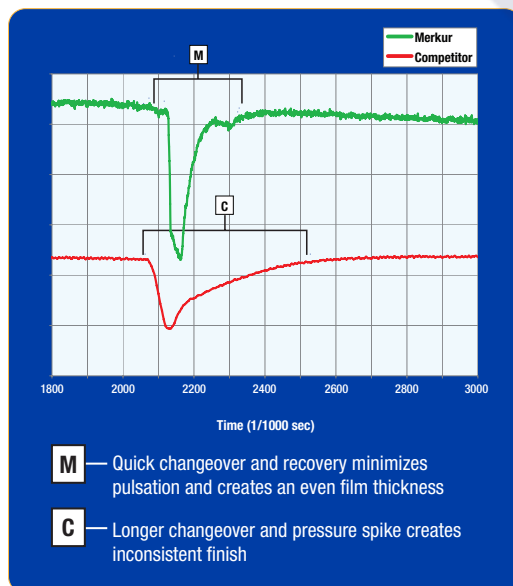

The right flows at the right pressures to fit all of your spraying needs.

With 13 different pump models to choose from, Merkur fine finish spray packages are designed to improve productivity, reduce costs, lower emissions and provide consistent, high quality finishes for all of your demanding applications.

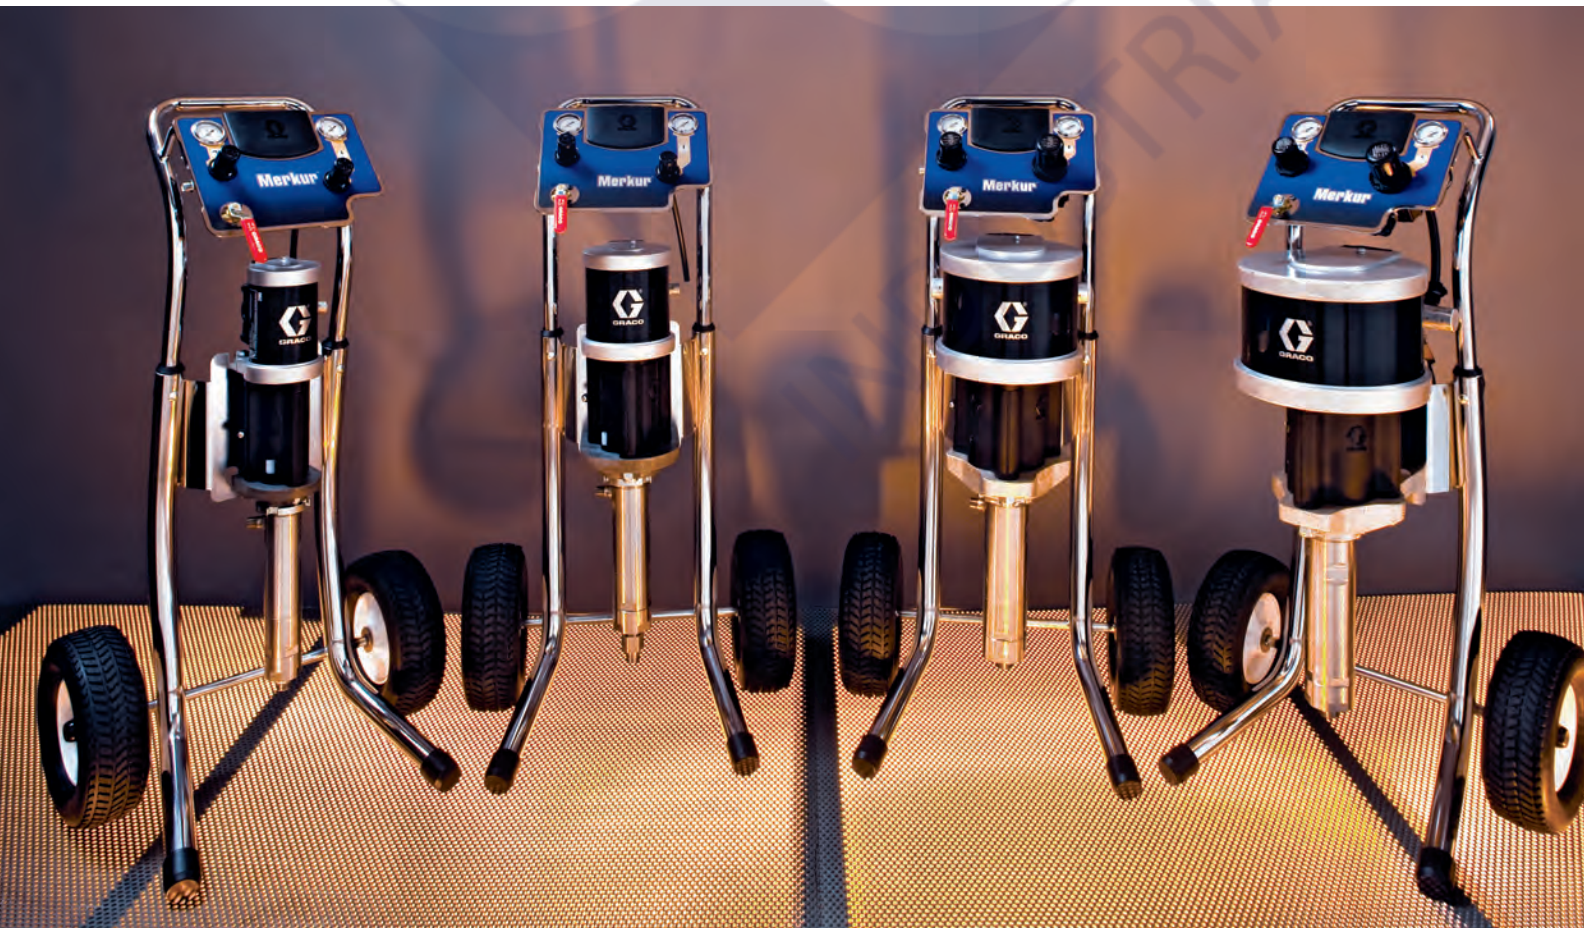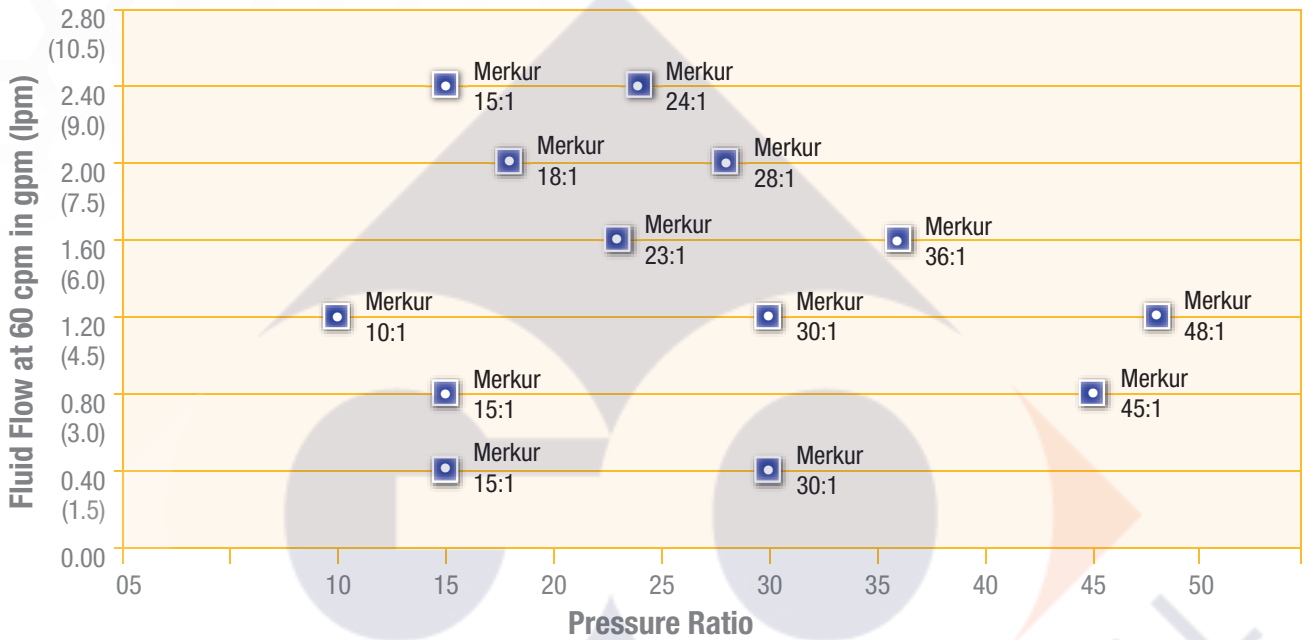

Making the Right Choice for your Application

Combine a Merkur pump with a variety of guns and accessories, and you'll be on your way to selecting the package that's right for you!

Select a Spray Technology



PerformAA™
Air Assist Gun



PerformAA™
Airless Gun



Pro Xp™
Air Assist Electrostatic

Select a Mounting Configuration



Cart Mount



Wall Mount



Stand Mount

Determine the Accessories that are right for you!



Suction Hose



Hopper



Heater



Filter

Ordering Information

Air Assist Packages

| Merkur Assembly Part No. | Pump Ratio | Flow Rate at 60 cpm gpm (lpm) | Wall Mount | Cart Mount | Stand Mount | DataTrak | DataTrak - Cycle Count Only | PerformAA 15 General Finishing Air Cap | PerformAA 15 Air Cap | Fluid Filter | Suction Hose | Hopper (1.5 gal) |
|--------------------------------------|------------|-------------------------------|------------|------------|-------------|----------|-----------------------------|--|----------------------|--------------|--------------|------------------|
| Merkur 10:1 1.2 gpm (4.5 lpm) | | | | | | | | | | | | |
| G10W05 | 10 | 1.2 (4.5) | • | | | | | • | | | • | |
| G10W06 | 10 | 1.2 (4.5) | • | | | | • | • | | | • | |
| G10W07 | 10 | 1.2 (4.5) | • | | | | | • | | | • | |
| G10W08 | 10 | 1.2 (4.5) | • | | | | • | • | | | • | |
| G10W11 | 10 | 1.2 (4.5) | • | | | | | | LV | | • | |
| G10C07 | 10 | 1.2 (4.5) | | • | | | | • | | | • | |
| G10C08 | 10 | 1.2 (4.5) | | • | | | • | • | | | • | |
| G10C09 | 10 | 1.2 (4.5) | | • | | | | • | | | • | |
| G10C10 | 10 | 1.2 (4.5) | | • | | | • | • | | | • | |
| G10C11 | 10 | 1.2 (4.5) | | • | | | | • | | | | • |
| G10C13 | 10 | 1.2 (4.5) | | • | | | | • | | | | • |
| G10C15 | 10 | 1.2 (4.5) | | • | | | | | LV | | • | |
| Merkur 15:1 0.4 gpm (1.5 lpm) | | | | | | | | | | | | |
| G15W05 | 15 | 0.4 (1.5) | • | | | | | • | | | • | |
| G15W06 | 15 | 0.4 (1.5) | • | | | | • | • | | | • | |
| G15W07 | 15 | 0.4 (1.5) | • | | | | | • | | | • | |
| G15W08 | 15 | 0.4 (1.5) | • | | | | • | • | | | • | |
| G15W11 | 15 | 0.4 (1.5) | • | | | | | | WL | | • | |
| G15W13 | 15 | 0.4 (1.5) | • | | | | | | WL | | • | |
| G15C07 | 15 | 0.4 (1.5) | | • | | | | • | | | • | |
| G15C08 | 15 | 0.4 (1.5) | | • | | | • | • | | | • | |
| G15C09 | 15 | 0.4 (1.5) | | • | | | | • | | | • | |
| G15C10 | 15 | 0.4 (1.5) | | • | | | • | • | | | • | |
| G15C11 | 15 | 0.4 (1.5) | | • | | | | • | | | | • |
| G15C12 | 15 | 0.4 (1.5) | | • | | | • | • | | | • | |
| G15C13 | 15 | 0.4 (1.5) | | • | | | | • | | | • | |
| G15C14 | 15 | 0.4 (1.5) | | • | | | • | • | | | • | |
| G15C15 | 15 | 0.4 (1.5) | | • | | | | | WL | | • | |
| G15C17 | 15 | 0.4 (1.5) | | • | | | | | WL | | • | |
| G15T03 | 15 | 0.4 (1.5) | | | • | | | • | | | • | |
| G15T04 | 15 | 0.4 (1.5) | | | • | | • | • | | | • | |
| G15T05 | 15 | 0.4 (1.5) | | | • | | | • | | | • | |
| Merkur 15:1 0.8 gpm (3.0 lpm) | | | | | | | | | | | | |
| G15W25 | 15 | 0.8 (3.0) | • | | | | | • | | | • | |
| G15W26 | 15 | 0.8 (3.0) | • | | | | • | • | | | • | |
| G15W27 | 15 | 0.8 (3.0) | • | | | | | • | | | • | |
| G15W28 | 15 | 0.8 (3.0) | • | | | | • | • | | | • | |
| G15C27 | 15 | 0.8 (3.0) | | • | | | | • | | | • | |
| G15C28 | 15 | 0.8 (3.0) | | • | | | • | • | | | • | |
| G15C29 | 15 | 0.8 (3.0) | | • | | | | • | | | • | |
| G15C30 | 15 | 0.8 (3.0) | | • | | | • | • | | | • | |
| G15C31 | 15 | 0.8 (3.0) | | • | | | | • | | | | • |
| G15C33 | 15 | 0.8 (3.0) | | • | | | | • | | | • | |
| G15T13 | 15 | 0.8 (3.0) | | | • | | | • | | | • | |
| G15T14 | 15 | 0.8 (3.0) | | | • | • | | • | | | • | |
| G15T15 | 15 | 0.8 (3.0) | | | • | | | • | | | • | |
| Merkur 15:1 2.4 gpm (9.0 lpm) | | | | | | | | | | | | |
| G15W55 | 15 | 2.4 (9.0) | • | | | | | • | | | • | |
| G15W56 | 15 | 2.4 (9.0) | • | | | | • | • | | | • | |
| G15C83 | 15 | 2.4 (9.0) | | • | | | | • | | | • | |
| G15C84 | 15 | 2.4 (9.0) | | • | | | • | • | | | • | |



Air Assist Cart Package


*All packages include a 25 ft (7.5m) fluid and air hose and an AXM or AXF spray tip
Air caps: LV = low viscosity, WL = wood lacquer

Ordering Information

Air Assist Packages

| Merkur Assembly Part No. | Pump Ratio | Flow Rate at 60 cpm gpm (lpm) | Wall Mount | Cart Mount | DataTrak | PerformAA 50 | PerformAA RAC Gun | Fluid Filter | Suction Hose | Hopper | Heated Package | Heater Voltage |
|--------------------------------------|------------|-------------------------------|------------|------------|----------|--------------|-------------------|--------------|--------------|--------|----------------|----------------|
| Merkur 18:1 2.0 gpm (7.5 lpm) | | | | | | | | | | | | |
| G18W07 | 18 | 2.0 (7.5) | • | | | • | | • | • | | | |
| G18W08 | 18 | 2.0 (7.5) | • | | • | • | | • | • | | | |
| G18W09 | 18 | 2.0 (7.5) | • | | | | • | • | • | | | |
| G18W10 | 18 | 2.0 (7.5) | • | | • | | • | • | • | | | |
| G18C05 | 18 | 2.0 (7.5) | | • | | • | | • | • | | | |
| G18C06 | 18 | 2.0 (7.5) | | • | • | • | | • | • | | | |
| G18C07 | 18 | 2.0 (7.5) | | • | | | • | • | • | | | |
| G18C08 | 18 | 2.0 (7.5) | | • | • | | • | • | • | | | |
| Merkur 23:1 1.6 gpm (6.0 lpm) | | | | | | | | | | | | |
| G23W09 | 23 | 1.6 (6.0) | • | | | • | | • | • | | | |
| G23W10 | 23 | 1.6 (6.0) | • | | • | • | | • | • | | | |
| G23W11 | 23 | 1.6 (6.0) | • | | | | • | • | • | | | |
| G23W12 | 23 | 1.6 (6.0) | • | | • | | • | • | • | | | |
| G23C07 | 23 | 1.6 (6.0) | | • | | • | | • | • | | | |
| G23C11 | 23 | 1.6 (6.0) | | • | | • | | • | • | • | | |
| G23C09 | 23 | 1.6 (6.0) | | • | | • | | • | • | | | |
| G23C12 | 23 | 1.6 (6.0) | | • | • | • | | • | • | | | |
| G23C13 | 23 | 1.6 (6.0) | | • | | | • | • | • | | | |
| G23C14 | 23 | 1.6 (6.0) | | • | • | | • | • | • | | | |
| Merkur 24:1 2.4 gpm (9.0 lpm) | | | | | | | | | | | | |
| G24W07 | 24 | 2.4 (9.0) | • | | | • | | • | • | | | |
| G24W08 | 24 | 2.4 (9.0) | • | | • | • | | • | • | | | |
| G24W09 | 24 | 2.4 (9.0) | • | | | | • | • | • | | | |
| G24W10 | 24 | 2.4 (9.0) | • | | • | | • | • | • | | | |
| G24C09 | 24 | 2.4 (9.0) | | • | | • | | • | • | | | |
| G24C10 | 24 | 2.4 (9.0) | | • | • | • | | • | • | | | |
| G24C11 | 24 | 2.4 (9.0) | | • | | | • | • | • | | | |
| G24C12 | 24 | 2.4 (9.0) | | • | • | | • | • | • | | | |
| Merkur 28:1 2.0 gpm (7.5 lpm) | | | | | | | | | | | | |
| G28W11 | 28 | 2.0 (7.5) | • | | | • | | • | • | | | |
| G28W12 | 28 | 2.0 (7.5) | • | | • | • | | • | • | | | |
| G28W13 | 28 | 2.0 (7.5) | • | | | | • | • | • | | | |
| G28W14 | 28 | 2.0 (7.5) | • | | • | | • | • | • | | | |
| G28W17 | 28 | 2.0 (7.5) | • | | | • | | • | • | • | • | 120 |
| G28W18 | 28 | 2.0 (7.5) | • | | • | • | | • | • | • | • | 120 |
| G28C09 | 28 | 2.0 (7.5) | | • | | • | | • | • | | | |
| G28C10 | 28 | 2.0 (7.5) | | • | • | • | | • | • | | | |
| G28C11 | 28 | 2.0 (7.5) | | • | | | • | • | • | | | |
| G28C12 | 28 | 2.0 (7.5) | | • | • | | • | • | • | | | |
| G28C15 | 28 | 2.0 (7.5) | | • | | • | | • | • | • | • | 120 |
| G28C16 | 28 | 2.0 (7.5) | | • | • | • | | • | • | • | • | 120 |

*All packages have a 25 ft (7.5 m) fluid and air hose

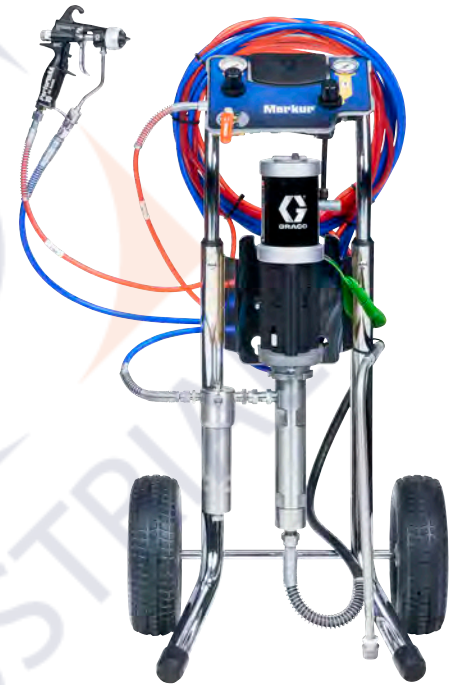

Air Assist Cart Package



Ordering Information

Air Assist Packages

| Merkur Assembly Part No. | Pump Ratio | Flow Rate at 60 cpm gpm (lpm) | Wall Mount | Cart Mount | Stand Mount | DataTrak | PerformAA 50 | PerformAA RAC Gun | Fluid Filter | Suction Hose | Hopper (1.5 gal) | Heated Package | Heater Voltage |
|--------------------------------------|------------|-------------------------------|------------|------------|-------------|----------|--------------|-------------------|--------------|--------------|------------------|----------------|----------------|
| Merkur 30:1 0.4 gpm (1.5 lpm) | | | | | | | | | | | | | |
| G30W13 | 30 | 0.4 (1.5) | • | | | | • | | | • | | | |
| G30W14 | 30 | 0.4 (1.5) | • | | | • | • | | | • | | | |
| G30W15 | 30 | 0.4 (1.5) | • | | | | • | | | • | | | |
| G30W16 | 30 | 0.4 (1.5) | • | | | • | • | | | • | | | |
| G30W17 | 30 | 0.4 (1.5) | • | | | | • | | | • | | | |
| G30W18 | 30 | 0.4 (1.5) | • | | | • | • | | | • | | | |
| G30C21 | 30 | 0.4 (1.5) | | • | | | • | | | • | | | |
| G30C22 | 30 | 0.4 (1.5) | | • | | • | • | | | • | | | |
| G30C23 | 30 | 0.4 (1.5) | | • | | | • | | | • | • | | |
| G30C25 | 30 | 0.4 (1.5) | | • | | | • | | | • | • | | |
| G30C26 | 30 | 0.4 (1.5) | | • | | • | • | | | • | | | |
| G30C29 | 30 | 0.4 (1.5) | | • | | | • | | | • | | | |
| G30C30 | 30 | 0.4 (1.5) | | • | | • | • | | | • | | | |
| G30C31 | 30 | 0.4 (1.5) | | • | | | • | | | • | • | | |
| G30C35 | 30 | 0.4 (1.5) | | • | | | • | | | • | • | | |
| G30C33 | 30 | 0.4 (1.5) | | • | | | • | | | • | | | |
| G30C34 | 30 | 0.4 (1.5) | | • | | • | • | | | • | | | |
| G30T03 | 30 | 0.4 (1.5) | | | • | | • | | | • | | | |
| G30T04 | 30 | 0.4 (1.5) | | | • | • | • | | | • | | | |
| G30T05 | 30 | 0.4 (1.5) | | | • | | • | | | • | | | |
| G30T06 | 30 | 0.4 (1.5) | | | • | • | • | | | • | | | |
| G30T09 | 30 | 0.4 (1.5) | | | • | | • | | | • | • | | |
| G30T07 | 30 | 0.4 (1.5) | | | • | | • | | | • | | | |
| G30T08 | 30 | 0.4 (1.5) | | | • | • | • | | | • | | | |
| G30T11 | 30 | 0.4 (1.5) | | | • | | • | | | • | | | |
| G30T12 | 30 | 0.4 (1.5) | | | • | • | • | | | • | | | |
| Merkur 30:1 1.2 gpm (4.5 lpm) | | | | | | | | | | | | | |
| G30W73 | 30 | 1.2 (4.5) | • | | | | • | | | • | | | |
| G30W74 | 30 | 1.2 (4.5) | • | | | • | • | | | • | | | |
| G30W75 | 30 | 1.2 (4.5) | • | | | | • | | | • | | | |
| G30W76 | 30 | 1.2 (4.5) | • | | | • | • | | | • | | | |
| G30W79 | 30 | 1.2 (4.5) | • | | | | • | | | • | | • | 120 |
| G30W80 | 30 | 1.2 (4.5) | • | | | • | • | | | • | | • | 120 |
| G30C65 | 30 | 1.2 (4.5) | | • | | | • | | | • | | | |
| G30C67 | 30 | 1.2 (4.5) | | • | | | • | | | • | | | |
| G30C68 | 30 | 1.2 (4.5) | | • | | • | • | | | • | | | |
| G30C71 | 30 | 1.2 (4.5) | | • | | | • | | | • | • | | |
| G30C73 | 30 | 1.2 (4.5) | | • | | | • | | | • | | | |
| G30C74 | 30 | 1.2 (4.5) | | • | | • | • | | | • | | | |
| G30C77 | 30 | 1.2 (4.5) | | • | | | • | | | • | | • | 120 |
| G30C78 | 30 | 1.2 (4.5) | | • | | • | • | | | • | | • | 120 |
| Merkur 36:1 1.6 gpm (6.0 lpm) | | | | | | | | | | | | | |
| G36W13 | 36 | 1.6 (6.0) | • | | | | • | | | • | | | |
| G36W14 | 36 | 1.6 (6.0) | • | | | • | • | | | • | | | |
| G36W15 | 36 | 1.6 (6.0) | • | | | | • | | | • | | | |
| G36W16 | 36 | 1.6 (6.0) | • | | | • | • | | | • | | | |
| G36C09 | 36 | 1.6 (6.0) | | • | | | • | | | • | | | |
| G36C10 | 36 | 1.6 (6.0) | | • | | • | • | | | • | | | |
| G36C11 | 36 | 1.6 (6.0) | | • | | | • | | | • | | | |
| G36C12 | 36 | 1.6 (6.0) | | • | | • | • | | | • | | | |

*All packages have a 25 ft (7.5 m) fluid and air hose



Airless Wall Mount Package



Air Assist Stand Package

Ordering Information

Air Assist Packages

| Merkur Assembly Part No. | Pump Ratio | Flow Rate at 60 cpm gpm (lpm) | Wall Mount | Cart Mount | DataTrak | PerformAA 50 | PerformAA RAC Gun | Fluid Filter | Suction Hose |
|--------------------------------------|------------|-------------------------------|------------|------------|----------|--------------|-------------------|--------------|--------------|
| Merkur 45:1 0.8 gpm (3.0 lpm) | | | | | | | | | |
| G45W13 | 45 | 0.8 (3.0) | • | | | • | | • | • |
| G45W14 | 45 | 0.8 (3.0) | • | | • | • | | • | • |
| G45W15 | 45 | 0.8 (3.0) | • | | | | • | • | • |
| G45W16 | 45 | 0.8 (3.0) | • | | • | | • | • | • |
| G45C15 | 45 | 0.8 (3.0) | | • | | • | | • | • |
| G45C16 | 45 | 0.8 (3.0) | | • | • | • | | • | • |
| G45C17 | 45 | 0.8 (3.0) | | • | | | • | • | • |
| G45C18 | 45 | 0.8 (3.0) | | • | • | | • | • | • |
| Merkur 48:1 1.2 gpm (4.5 lpm) | | | | | | | | | |
| G48W13 | 48 | 1.2 (4.5) | • | | | • | | • | • |
| G48W14 | 48 | 1.2 (4.5) | • | | | • | | • | • |
| G48W15 | 48 | 1.2 (4.5) | • | | | | • | • | • |
| G48W16 | 48 | 1.2 (4.5) | • | | • | | • | • | • |
| G48C11 | 48 | 1.2 (4.5) | | • | | • | | • | • |
| G48C12 | 48 | 1.2 (4.5) | | • | • | • | | • | • |
| G48C13 | 48 | 1.2 (4.5) | | • | | | • | • | • |
| G48C14 | 48 | 1.2 (4.5) | | • | • | | • | • | • |

*All packages have a 25 ft (7.5 m) fluid and air hose

Airless Packages

| Merkur Assembly Part No. | Pump Ratio | Flow Rate at 60 cpm gpm (lpm) | Wall Mount | Cart Mount | DataTrak | XTR5+ Gun | PerformAA 50 Airless Gun | Fluid Filter | Suction Hose | Heated Package | Heater Voltage |
|--------------------------------------|------------|-------------------------------|------------|------------|----------|-----------|--------------------------|--------------|--------------|----------------|----------------|
| Merkur 23:1 1.6 gpm (6.0 lpm) | | | | | | | | | | | |
| G23W07 | 23 | 1.6 (6.0) | • | | | • | | • | • | | |
| G23W08 | 23 | 1.6 (6.0) | • | | • | • | | • | • | | |
| G23C03 | 23 | 1.6 (6.0) | | • | | • | | • | • | | |
| G23C04 | 23 | 1.6 (6.0) | | • | • | • | | • | • | | |
| Merkur 24:1 2.4 gpm (9.0 lpm) | | | | | | | | | | | |
| G24W05 | 24 | 2.4 (9.0) | • | | | • | | • | • | | |
| G24W06 | 24 | 2.4 (9.0) | • | | • | • | | • | • | | |
| G24C03 | 24 | 2.4 (9.0) | | • | | • | | • | • | | |
| G24C04 | 24 | 2.4 (9.0) | | • | • | • | | • | • | | |
| Merkur 28:1 2.0 gpm (7.5 lpm) | | | | | | | | | | | |
| G28W05 | 28 | 2.0 (7.5) | • | | | • | | • | • | | |
| G28W06 | 28 | 2.0 (7.5) | • | | • | • | | • | • | | |
| G28W07 | 28 | 2.0 (7.5) | • | | | • | | • | • | • | 120 |
| G28W08 | 28 | 2.0 (7.5) | • | | • | • | | • | • | • | 120 |
| G28C03 | 28 | 2.0 (7.5) | | • | | • | | • | • | | |
| G28C04 | 28 | 2.0 (7.5) | | • | • | • | | • | • | | |
| G28C05 | 28 | 2.0 (7.5) | | • | | • | | • | • | • | 120 |
| G28C06 | 28 | 2.0 (7.5) | | • | • | • | | • | • | • | 120 |
| Merkur 30:1 0.4 gpm (1.5 lpm) | | | | | | | | | | | |
| G30W07 | 30 | 0.4 (1.5) | • | | | • | | • | • | | |
| G30W08 | 30 | 0.4 (1.5) | • | | • | • | | • | • | | |
| G30C07 | 30 | 0.4 (1.5) | | • | | • | | • | • | | |
| G30C08 | 30 | 0.4 (1.5) | | • | | • | | • | • | | |
| G30C09 | 30 | 0.4 (1.5) | | • | | • | | • | • | | |
| G30C10 | 30 | 0.4 (1.5) | | • | • | • | | • | • | | |
| Merkur 30:1 1.2 gpm (4.5 lpm) | | | | | | | | | | | |
| G30W57 | 30 | 1.2 (4.5) | • | | | • | | • | • | | |
| G30W58 | 30 | 1.2 (4.5) | • | | • | • | | • | • | | |
| G30W59 | 30 | 1.2 (4.5) | • | | | • | | • | • | | |
| G30W60 | 30 | 1.2 (4.5) | • | | • | • | | • | • | | |
| G30W67 | 30 | 1.2 (4.5) | • | | | • | | • | • | • | 120 |
| G30W68 | 30 | 1.2 (4.5) | • | | • | • | | • | • | • | 120 |
| G30W87 | 30 | 1.2 (4.5) | • | | | • | | • | • | | |
| G30C55 | 30 | 1.2 (4.5) | | • | | • | | • | • | | |
| G30C56 | 30 | 1.2 (4.5) | | • | • | • | | • | • | | |
| G30C59 | 30 | 1.2 (4.5) | | • | | • | | • | • | • | 120 |
| G30C60 | 30 | 1.2 (4.5) | | • | • | • | | • | • | • | 120 |
| G30C97 | 30 | 1.2 (4.5) | | • | | • | | • | • | | |
| G30C99° | 30 | 1.2 (4.5) | | • | | • | | • | • | | |

*All packages have a 25 ft (7.5 m) fluid hose

°Fluid filter includes drain valve



Heated Air Assist Cart Package

| Merkur 45:1 0.8 gpm (3.0 lpm) | | | | | | | | | | | |
|--------------------------------------|----|-----------|---|---|--|--|--|---|---|---|--|
| G45C25 | 45 | 0.8 (3.0) | | • | | | | • | • | • | |
| G45W21 | 45 | 0.8 (3.0) | • | | | | | • | • | • | |

Ordering Information

Electrostatic Packages

All electrostatic packages include a Pro Xp Air Assist electrostatic gun, suction hose and fluid filter

| Merkur Assembly Part No. | Pump Ratio | Flow Rate at 60 cpm gpm (lpm) | Wall Mount | Cart Mount | DataTrak | Heated Package | Heater Voltage | Pro Xp85 kV Smart | Pro Xp85 kV Standard | Pro Xp60 kV Standard |
|--------------------------------------|------------|----------------------------------|------------|------------|----------|----------------|----------------|-------------------|----------------------|----------------------|
| Merkur 15:1 2.4 gpm (9.0 lpm) | | | | | | | | | | |
| G15W57 | 15 | 2.4 (9.0) | • | | | | | • | | |
| G15W58 | 15 | 2.4 (9.0) | • | | • | | | • | | |
| G15C85 | 15 | 2.4 (9.0) | | • | | | | • | | |
| G15C86 | 15 | 2.4 (9.0) | | • | • | | | • | | |
| Merkur 18:1 2.0 gpm (7.5 lpm) | | | | | | | | | | |
| G18W11 | 18 | 2.0 (7.5) | • | | | | | • | | |
| G18W12 | 18 | 2.0 (7.5) | • | | • | | | • | | |
| G18W13 | 28 | 2.0 (7.5) | • | | | • | 120 | • | | |
| G18W14 | 28 | 2.0 (7.5) | • | | • | • | 120 | • | | |
| G18C09 | 18 | 2.0 (7.5) | | • | | | | • | | |
| G18C10 | 18 | 2.0 (7.5) | | • | • | | | • | | |
| Merkur 23:1 1.6 gpm (6.0 lpm) | | | | | | | | | | |
| G23W13 | 23 | 1.6 (6.0) | • | | | | | • | | |
| G23W14 | 23 | 1.6 (6.0) | • | | • | | | • | | |
| G23C15 | 23 | 1.6 (6.0) | | • | | | | • | | |
| G23C16 | 23 | 1.6 (6.0) | | • | • | | | • | | |
| Merkur 24:1 2.4 gpm (9.0 lpm) | | | | | | | | | | |
| G24W11 | 24 | 2.4 (9.0) | • | | | | | • | | |
| G24W12 | 24 | 2.4 (9.0) | • | | • | | | • | | |
| G24C13 | 24 | 2.4 (9.0) | | • | | | | • | | |
| G24C14 | 24 | 2.4 (9.0) | | • | • | | | • | | |
| Merkur 28:1 2.0 gpm (7.5 lpm) | | | | | | | | | | |
| G28W15 | 28 | 2.0 (7.5) | • | | | | | • | | |
| G28W16 | 28 | 2.0 (7.5) | • | | • | | | • | | |
| G28W21 | 28 | 2.0 (7.5) | • | | | • | 120 | • | | |
| G28W22 | 28 | 2.0 (7.5) | • | | • | • | 120 | • | | |
| G28C13 | 28 | 2.0 (7.5) | | • | | | | • | | |
| G28C14 | 28 | 2.0 (7.5) | | • | • | | | • | | |
| G28C19 | 28 | 2.0 (7.5) | | • | | • | 120 | • | | |
| G28C20 | 28 | 2.0 (7.5) | | • | • | • | 120 | • | | |
| G28C23 | 28 | 2.0 (7.5) | | • | | | | • | | • |
| G28C25 | 28 | 2.0 (7.5) | | • | | | | • | | • |
| Merkur 30:1 1.2 gpm (4.5 lpm) | | | | | | | | | | |
| G30W77 | 30 | 1.2 (4.5) | • | | | | | • | | |
| G30W78 | 30 | 1.2 (4.5) | • | | • | | | • | | |
| G30W83 | 30 | 1.2 (4.5) | • | | | • | 120 | • | | |
| G30W84 | 30 | 1.2 (4.5) | • | | • | • | 120 | • | | |
| G30C75 | 30 | 1.2 (4.5) | | • | | | | • | | |
| G30C76 | 30 | 1.2 (4.5) | | • | • | | | • | | |
| G30C81 | 30 | 1.2 (4.5) | | • | | • | 120 | • | | |
| G30C82 | 30 | 1.2 (4.5) | | • | • | • | 120 | • | | |
| G30C87 | 30 | 1.2 (4.5) | | • | | | | • | | • |
| G30C89 | 30 | 1.2 (4.5) | | • | | | | • | | • |

*All packages have a 25 ft (7.5 m) grounded electrostatic fluid and air hose

Spray Guns

Refer to the spray gun brochure for additional model numbers.

All guns include tip of choice.

| | |
|--------|--|
| 26B501 | PerformAA 15 Spray Gun |
| 26B503 | PerformAA 15 Wood Lacquer Spray Gun |
| 26B505 | PerformAA 15 Low Viscosity Spray Gun |
| 26B511 | PerformAA 50 Spray Gun |
| 26B518 | PerformAA RAC Spray Gun |
| XTR521 | XTR5+ Airless Spray Gun |
| 26B520 | PerformAA 50 Airless |
| H85M10 | Pro Xp85 AA Smart Electrostatic Spray Gun |
| H85T10 | Pro Xp85 AA Standard Electrostatic Spray Gun |
| H60T10 | Pro Xp60 AA Standard Electrostatic Spray Gun |

Accessories

| | |
|--------|--|
| 256410 | Hopper 1.5 gal (5 l) polyethylene |
| 243340 | Pail Cover with Agitator Use to agitate material in a 5 gal (18.9 l) pail |
| 222121 | Fluid Regulator, Stainless Steel Maximum working pressure: 1500 psi (103 bar, 10.3 MPa) Regulator range: 150-1200 psi (10-28 bar, 1-8.2 MPa) |
| 24A587 | Pump Outlet Fluid Filter, Stainless Steel 60 mesh (250 micron), 5000 psi (350 bar, 25 MPa) |
| 256425 | Fluid Filter Drain Valve, Stainless Steel 5000 psi (350 bar, 35 MPa) |
| 224458 | Replacement Filter Screen Element 2-pack elements, 30 mesh, SST |
| 224459 | Replacement Filter Screen Element 2-pack elements, 60 mesh, SST |
| 24A540 | Air Control Gauge Covers 5 sheets of 10 covers |
| 24B187 | Second AA Gun Kit Includes air regulator and gauge |

DataTrak

| | |
|--------|--|
| 24A575 | Upgrade Kit for 200 cc and 400 cc Air Motors |
| 24A576 | Upgrade Kit for 1200 cc and 1800 cc Air Motors |
| 24A592 | Upgrade Kit for DataTrak with Cycle Count Only |

Suction Hoses

| | |
|--------|---|
| 24A954 | 55 gal (208 l) Drum Suction Hose and Strainer, 3/4 in fluid inlet |
| 24B598 | 55 gal (208 l) Drum Suction Hose and Strainer, 1 in fluid inlet |
| 24B337 | PTFE Lined Suction Hose for Cart Mount Pump, 3/4 in inlet |
| 24B338 | PTFE Lined Suction Hose for Cart Mount Pump, 1 in inlet |
| 24J315 | PTFE Lined Suction Hose for Wall Mount Pumps, 1/2 in inlet |
| 24B424 | PTFE Lined Suction Hose for Wall Mount Pump, 3/4 in inlet |
| 24B425 | PTFE Lined Suction Hose for Wall Mount Pump, 1 in inlet |

Gun Hoses

| | |
|--------|--|
| 256390 | 25 ft (7.5 m) Air Hose |
| 241812 | 25 ft (7.5 m) Fluid Hose 3300 psig (228 bar) |
| 24A955 | 50 ft (15.2 m) Bundled Air and Fluid Hose 3300 psig (228 bar) |
| 256389 | 50 ft (15.2 m) Air Hose |
| 24B562 | 50 ft (15.2 m) Fluid Hose 3300 psig (228 bar) |
| 24A588 | Hose Clips Pack of 10 |

Technical Information

Merkur Technical Specifications

| Pump Ratio | Merkur 10:1 | Merkur 15:1 | Merkur 15:1 | Merkur 15:1 | Merkur 18:1 | Merkur 23:1 | Merkur 24:1 |
|--|-------------------------|-------------------------|-------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Fluid Flow @ 60 cpm | 1.2 gpm (4.5 lpm) | 0.4 gpm (1.5 lpm) | 0.8 gpm (3.0 lpm) | 2.4 gpm (9.0 lpm) | 2.0 gpm (7.5 lpm) | 1.6 gpm (6.0 lpm) | 2.4 gpm (9.0 lpm) |
| Pump Volume per Cycle | 2.5 oz (75 cc) | 0.8 oz (25 cc) | 1.7 oz (50 cc) | 5 oz (150 cc) | 4.2 oz (125 cc) | 3.4 oz (100 cc) | 5 oz (150 cc) |
| Maximum Fluid Outlet Pressure | 1000 psi (69 bar) | 1500 psi (103 bar) | 1500 psi (103 bar) | 1500 psi (103 bar) | 1800 psi (124 bar) | 2300 psi (158 bar) | 2400 psi (165 bar) |
| Maximum Air Inlet Pressure | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) |
| Air Motor Displacement (cc per stroke) | 400 cc | 200 cc | 400 cc | 1200 cc | 1200 cc | 1200 cc | 1800 cc |
| Air Consumption @ 100 psi (7 bar, 0.7 MPa) @ 20 cpm | 6 scfm (0.17 m3/min) | 3 scfm (0.08 m3/min) | 6 scfm (0.17 m3/min) | 17 scfm (0.48 m3/min) | 17 scfm (0.48 m3/min) | 17 scfm (0.48 m3/min) | 26 scfm (0.74 m3/min) |
| Fluid Inlet Size | 3/4 npt(m) | 1/2 npt(m) | 3/4 npt(m) | 1 npt(m) | 1 npt(m) | 3/4 npt(m) | 1 npt(m) |
| Fluid Outlet Size | 3/8 npt(m) | 3/8 npt(m) | 3/8 npt(m) | 3/4 npt(m) | 1/2 npt(m) | 3/8 npt(m) | 3/4 npt(m) |
| Air Inlet (motor) | 1/4 npt(f) | 1/4 npt(f) | 1/4 npt(f) | 1/2 npt(f) | 1/2 npt(f) | 1/2 npt(f) | 1/2 npt(f) |

| Pump Ratio | Merkur 28:1 | Merkur 30:1 | Merkur 30:1 | Merkur 36:1 | Merkur 45:1 | Merkur 48:1 |
|--|--------------------------|-------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Fluid Flow @ 60 cpm | 2.0 gpm (7.5 lpm) | 0.4 gpm (1.5 lpm) | 1.2 gpm (4.5 lpm) | 1.6 gpm (6.0 lpm) | 0.8 gpm (3.0 lpm) | 1.2 gpm (4.5 lpm) |
| Volume per Cycle | 4.2 oz (125 cc) | 0.8 oz (25 cc) | 2.5 oz (75 cc) | 3.4 oz (100 cc) | 1.7 oz (50 cc) | 2.5 oz (75 cc) |
| Maximum Fluid Outlet Pressure | 2800 psi (192 bar) | 3000 psi (206 bar) | 3000 psi (206 bar) | 3600 psi (248 bar) | 4500 psi (310 bar) | 4800 psi (330 bar) |
| Maximum Air Inlet Pressure | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) | 100 psi (7 bar) |
| Air Motor Displacement (cc per stroke) | 1800 cc | 400 cc | 1200 cc | 1800 cc | 1200 cc | 1800 cc |
| Air Consumption @ 100 psi (7 bar, 0.7 MPa) @ 20 cpm | 26 scfm (0.74 m3/min) | 6 scfm (0.17 m3/min) | 17 scfm (0.48 m3/min) | 26 scfm (0.74 m3/min) | 17 scfm (0.48 m3/min) | 26 scfm (0.74 m3/min) |
| Fluid Inlet Size | 1 npt(m) | 1/2 npt(m) | 3/4 npt(m) | 3/4 npt(m) | 3/4 npt(m) | 3/4 npt(m) |
| Fluid Outlet Size | 1/2 npt(m) | 3/8 npt(m) | 3/8 npt(m) | 3/8 npt(m) | 3/8 npt(m) | 3/8 npt(m) |
| Air Inlet (motor) | 1/2 npt(f) | 1/4 npt(f) | 1/2 npt(f) | 1/2 npt(f) | 1/2 npt(f) | 1/2 npt(f) |

Instruction and Parts Manuals

- 312797 Merkur AA and Airless Spray Package
- 312798 Merkur Electrostatic Spray Package
- 313255 Merkur AA and Airless Heated Package
- 312794 Merkur Pumps
- 312792 Merkur Displacement Lower
- 312796 Merkur Air Motor



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Fluid Equipment
(Shanghai) Co., Ltd.
Building 7, No.1-2,
Wenshui Road 299,
Jing'an District,
Shanghai 200436
The People's Republic of China
Tel: 86 21 649 50088

INDIA

Graco India Pvt Ltd
Plot No 295, Udyog Vihar Phase-IV
Gurugram - 122015 (Haryana)
India
Tel: 91 124 661 0200
Fax: 91 124 661 0201

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
38, Samsung 1-ro 1-gil
Hwaseong-si, Gyeonggi-do,
18449
Republic of Korea
Tel: 82 31 8015 0961
Fax: 82 31 613 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877-84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America
Customer Service
800-328-0211
Fax 877-340-6427