


Flow Control Valve 3"

Our 3" Flow Control Valve is purpose built for remote/in-line installations. It supports diesel flow rates from 200lpm to 950lpm.

This product features a rotating Pilot Line inlet collar for ease of external Pilot Line routing during installation.

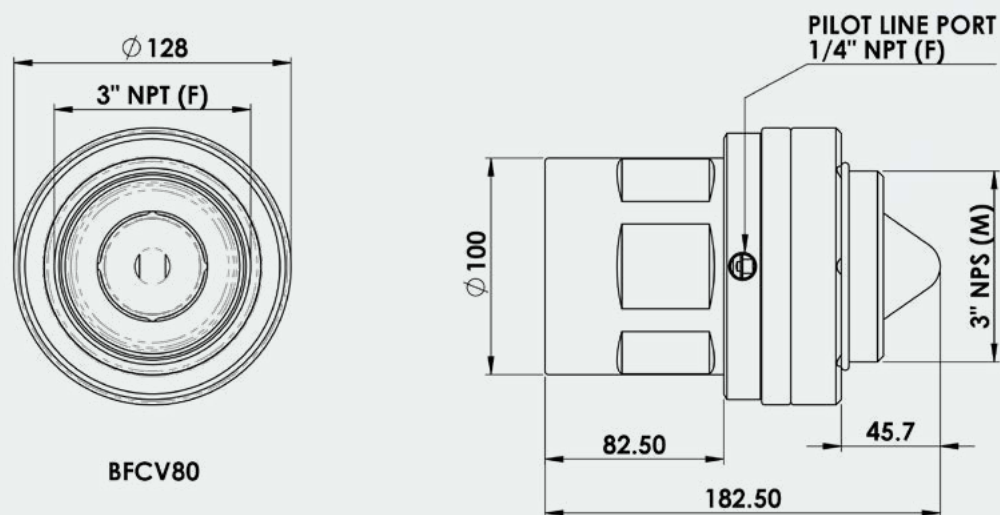

Part Number	Product Description	Tech Specs	Shipping - Dimensions & Weight
BFCV80	FillSafe Zero, Flow control Valve, 3" NPTF (inlet) x 3" NPSM (outlet), External Pilot Line	3"NPTFx3"NPSM	20x13x13cm 2.3kg

