




LOCKOUT HASPS

Lockout hasps ensure the energy source stays locked out until every individual working on the repairs or inspection is finished. Each worker involved in the process puts a lock on the hasp but the hasp cannot be removed until all locks have been removed. Ideal for group lockout programs where visibility to the energy source is important.

Dual Level Safety Lockout

▼ 12-hole

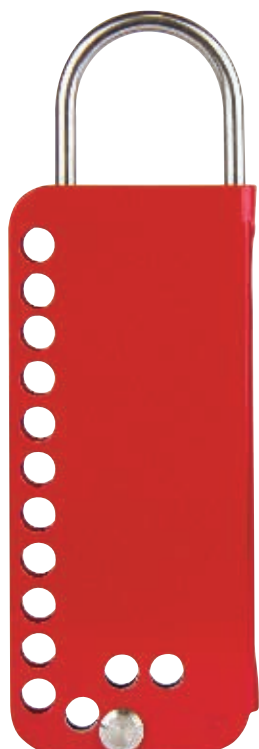

▼ 6-hole



Especially designed to allow for the removal of personal padlocks. This lockout enables a supervisory padlock (2 padlocks on the 12 hole) to remain safely locked in place to ensure the machine remains isolated.

- ▶ Fool proof access to the hasp entry and a tamperproof locking facility adds additional safety
- ▶ Manufactured from marine grade 316 stainless steel for maximum performance
- ▶ The lockout has a 5.7mm hasp shank that will fit most electrical switch gear, cabinets and distribution boards
- ▶ Available in 6 hole x 1 supervisory or 12 hole x 2 supervisory configurations

STANDARD PACKAGE: 1



PART NO.	DESCRIPTION
852439	Dual Level 6 Hole Safety Lockout
873384	Dual Level 12 Hole Safety Lockout

Safety Lockout Hasp



Allows for up to 6 workers to lockout a single point.

- ▶ Vinyl coated high tensile steel plated to resist rust
- ▶ Accepts up to 6 padlocks up to 9mm shackle diameter



PART NO.	JAW DIAMETER	QTY
65375	25mm	12
65375/1	25mm	1
65376	38mm	12
65376/1	38mm	1