



Parts and Accessories

For Protective Coatings High-Pressure Equipment



PROVEN QUALITY. LEADING TECHNOLOGY.

Table of Contents:

Airless Spray Guns	Page 4 - 5
Gun Tips and Guards	Page 6 - 7
Hoses	Page 8 - 9
Pump Lowers	Page 10
Packings	Page 11
Repair Parts and Accessories	Page 12 - 15



Don't risk your reputation with anything less

It's happened before: A critical piece of equipment meets an unfortunate end due to the failure of one, tiny component. That's why Graco doesn't build just any off-the-shelf part into its equipment. We select and manufacture high quality components our customers have come to rely on. Our equipment is superior because its parts are superior – in design, quality and performance.

Designed, tested and built for reliability

Great design is in the details. At Graco, our engineering team designs and specifies every part that is built into our machines. We test and re-test our parts to make sure they provide you with outstanding performance, long life and durability. You can't afford your equipment to fail in the field. As the trusted brand you rely on, neither can we.

Each quality part is dependent on another

Graco equipment is designed as a unified system, not as a collection of stand-alone parts. Every part is designed with a careful eye toward the parts it will interact with, and adjusted accordingly. When any of a system's parts is replaced with a lower quality, non-Graco part, the result may be a ripple effect that degrades not only its own functionality, but that of other parts throughout the system.

Protect your business with genuine Graco parts

When you need replacement parts, you could purchase cheaper alternatives. But why risk it? Off-the-shelf parts may hinder performance and possibly even damage your Graco equipment. You invest in Graco equipment because it is superior quality. It's what your business depends on. So protect your investment and your future. Trust only genuine Graco parts.

XTR-5 and XTR-7 Guns - Lightweight and ergonomic

While they are lightweight and comfortable to use, Graco's XTR™ guns can handle the toughest coatings and perform in the most extreme spray conditions. All our airless spray guns are made with pride and built to exacting standards in our Sioux Falls, South Dakota, U.S.A. manufacturing facility.

XTR-5: Maximum working pressure of 5000 psi (345 bar, 34.5 MPa)

XTR-7: Maximum working pressure of 7250 psi (500 bar, 50.0 MPa)

Needle Assembly and XHD™ Reverse-A-Clean (RAC)® SwitchTip™

- Exceptional life, pattern and finish
- Great for high solids coatings
- Factory-set needle needs no adjustment

Variety of Handle and Trigger Options

- 2- and 4-finger trigger options
- Oval-insulated or round handle
- Lightweight trigger pull

Easy Out™ Gun Filter

- Reduces tip plugs
- Eliminates collapsed filters
- Provides more filtration area

Trigger Guard

- Easily detaches for access to filter
 - Acts as a wrench to remove filter from gun handle
- Small profiles spray in tight areas

EasyGlide™ Swivel

- Allows easier gun movement under high pressure



Ordering Information

XTR-5 Airless Spray Guns

Maximum working pressure: 5000 psi (345 bar, 34.5 MPa)

XTR500	One inch round handle, four-finger trigger, no tip
XTR501	One inch round handle, four-finger trigger, 519 flat tip
XTR502	Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
XTR503	Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
XTR504	One inch round handle, four-finger trigger, 519 XHD RAC tip
XTR505	One inch round handle, two-finger trigger, 519 XHD RAC tip

XTR-7 Airless Spray Guns


Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)

XTR700	Round handle, four-finger trigger, no tip
XTR701	Round handle, four-finger trigger, 519 flat tip
XTR702	Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
XTR703	Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
XTR704	Round handle, four-finger trigger, 519 XHD RAC tip
XTR705	Round handle, two-finger trigger, 519 XHD RAC tip

XHF™ Gun - Rugged and capable

Graco's XHF gun is designed for high-flow, high-pressure applications. It handles the most demanding high-viscosity, protective coatings, including epoxy intumescent coatings and fiber-filled materials.

Maximum working pressure of 7250 psi (500 bar, 50 MPa)

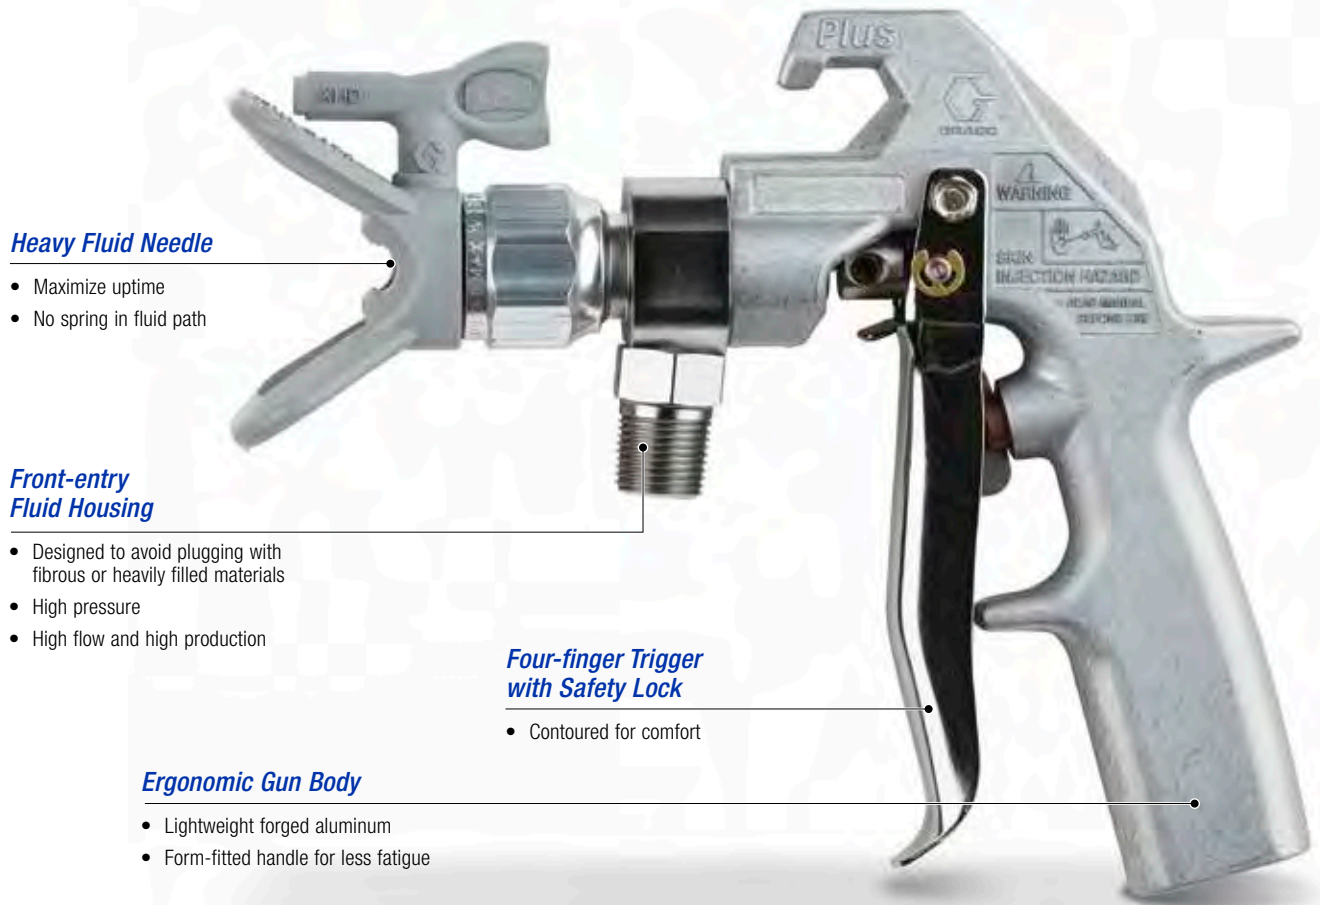

Heavy Fluid Needle

- Maximize uptime
- No spring in fluid path

Front-entry Fluid Housing

- Designed to avoid plugging with fibrous or heavily filled materials
- High pressure
- High flow and high production

Four-finger Trigger with Safety Lock

- Contoured for comfort

Ergonomic Gun Body

- Lightweight forged aluminum
- Form-fitted handle for less fatigue

Ordering Information

XHF Airless Spray Gun

262854 XHF Gun, includes XHD 429 tip

Gun Accessories for XTR and XHF Guns

237260 XHF Gun repair kit

246294 10 in (254 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)

246295 15 in (380 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)

246296 18 in (457 mm) Gun Extension, 7250 psi (500 bar, 50 MPa)

246297 180° spray nozzle, 7/8-14 UNC-2B, 7250 psi (500 bar, 50 MPa)

24P834 Gun swivel, 1/2 in f x 3/8 npsm, PTFE packing, 6500 psi (448 bar, 44.8 MPa)

248837 Gun Repair Kit, Includes Gasket, Needle and Seat

287449 Four-finger Round Trigger Kit

287450 Two-finger Trigger Kit

287451 Four-finger Oval Insulation Trigger Kit

287032 Filter, 60 Mesh

287033 Filter, 100 Mesh

287034 Filter, 60 and 100 Mesh Combination

247634 Seal kit, GHD conversion (5-pack)



ORIFICE SIZE - INCHES

		.041	.043	.045	.047	.049	.051	.053	.055	.057	.059	.061	.063	.065	.067	.069	.071	.075	.081	
FAN WIDTH	2-4 (51-102)																			
	4-6 (102-152)																			
	6-8 (152-203)	341	343	345	347		351		355											
	8-10 (203-254)	441	443	445	447	449	451		455		459	461	463	465	467		471	475	481	
	10-12 (254-305)	541	543	545	547	549	551	553	555	557		561		565	567		571	575		
	12-14 (305-356)	641	643	645	647	649	651		655	657	659	661	663	665	667	669	671	675		
	14-16 (356-406)	741	743		747	749	751	753	755			761			767		771			
	16-18 (406-457)	841	843		847		851		855			861	863		867					
	18-20 (457-508)																			
	Flow Rate (gpm)	1.8	1.98	2.17	2.37	2.58	2.79	4.26	3.25	3.49	3.74	4.0	4.26	4.53	4.82	5.11	5.41	6.04	7.04	
Flow Rate (lpm)	6.83	7.51	8.23	8.98	9.76	10.57	16.13	12.29	13.20	14.14	15.12	16.13	17.17	18.24	19.34	20.48	22.85	26.66		

Xtreme-Duty™ High-Pressure Hoses – Built to take a beating

Graco Xtreme-Duty high-pressure hoses are flexible and durable, yet extremely easy to use. Because hoses take a beating on the jobsite, Graco puts its hoses through a unique safety testing regimen in our state-of-the-art manufacturing facility. Each hose design undergoes **impulse, burst, flexibility** and **cold bend testing** to give you top quality, durability and reliable performance. Xtreme-Duty hoses are available in different lengths, diameters, and three different pressure ratings.

The length and diameter of hose you use affects the pressure drop of fluid to the spray gun. A longer hose has a greater pressure drop. A smaller hose diameter has greater pressure drop. If using two different diameter hoses coupled together, attach the larger diameter hose to the pump and the smaller hose to the gun to minimize pressure drop.



Designed for durability

- Chemical-resistant hose cover withstands a variety of solvents, acids and bases
- Cover stands up to sunlight, ozone, oxygen and extreme weather conditions
- Color-coded by pressure to take the guesswork out of using the right hose

Ordering Information

Xtreme-Duty 4500 psi (310 bar)			
Part #	Length	Hose Diameter	Female NPSM
H42503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H42506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H42510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H42525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H42550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H4251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H43803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H43806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H43810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H43825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H43850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H4381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H45010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H45025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H45050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H4501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

Xtreme-Duty 5600 psi (386 bar)			
Part #	Length	Hose Diameter	Female NPSM
H52503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H52506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H52510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H52525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H52550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H5251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H53803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H53806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H53810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H53825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H53850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H5381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H55010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H55025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H55050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H5501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

Xtreme-Duty 7250 psi (500 bar)			
Part #	Length	Hose Diameter	Female NPSM
H72503	3 ft (0.9 m)	1/4 in (6.4 mm)	1/4 in
H72506	6 ft (1.8 m)	1/4 in (6.4 mm)	1/4 in
H72510	10 ft (3.0 m)	1/4 in (6.4 mm)	1/4 in
H72525	25 ft (7.6 m)	1/4 in (6.4 mm)	1/4 in
H72550	50 ft (15.2 m)	1/4 in (6.4 mm)	1/4 in
H7251X	100 ft (30.5 m)	1/4 in (6.4 mm)	1/4 in
H73803	3 ft (0.9 m)	3/8 in (9.5 mm)	3/8 in
H73806	6 ft (1.8 m)	3/8 in (9.5 mm)	3/8 in
H73810	10 ft (3.0 m)	3/8 in (9.5 mm)	3/8 in
H73825	25 ft (7.6 m)	3/8 in (9.5 mm)	3/8 in
H73850	50 ft (15.2 m)	3/8 in (9.5 mm)	3/8 in
H7381X	100 ft (30.5 m)	3/8 in (9.5 mm)	3/8 in
H75003	3 ft (0.9 m)	1/2 in (12.7 mm)	1/2 in
H75010	10 ft (3.0 m)	1/2 in (12.7 mm)	1/2 in
H75025	25 ft (7.6 m)	1/2 in (12.7 mm)	1/2 in
H75050	50 ft (15.2 m)	1/2 in (12.7 mm)	1/2 in
H7501X	100 ft (30.5 m)	1/2 in (12.7 mm)	1/2 in

3/4 Inch Hoses

- H67550 3/4 in x 50 ft (15.2 m), 6500 psi (448 bar, 44.8 MPa)
 H77550 3/4 in x 50 ft (15.2 m), 7250 psi (500 bar, 50.0 MPa)

Heated Hoses – Reliable performance for plural-component sprayers

Heated hoses are designed for use with plural component high-pressure airless equipment, such as the Graco XP™ and XM™ plural component sprayers.



Safety Information

Remember to check your airless hose for kinks anywhere along its length. The hose should also be closely examined for splits, cracks or abrasions. Bulging anywhere on the hose or any amount of separation from the coupling could lead to hose failure and it should be replaced. For optimum hose life, never exceed the hose's rating for pressure and temperature.

Ordering Information

Water Jacketed Heated Hose (Approved for explosive atmospheres) 50 ft (15.2 m) sections

245840	Single hose, 1/4 in (6.3 mm), 5000 psi (345 bar, 34.5 MPa)
245841	Single hose, 1/4 in (6.3 mm), 7250 psi (500 bar, 50 MPa)
245842	Single hose, 3/8 in (9.5 mm), 5000 psi (345 bar, 34.5 MPa)
245843	Single hose, 3/8 in (9.5 mm), 7250 psi (500 bar, 50 MPa)
245844	Single hose, 1/2 in (12.7 mm), 5000 psi (345 bar, 34.5 MPa)
245845	Single hose, 1/2 in (12.7 mm), 7250 psi (500 bar, 50 MPa)
248118	Dual hose bundles, 1/2 in & 1/2 in (12.7 mm) 7250 psi (345 bar, 3.45 MPa)
248119	Dual hose bundles, 3/8 in & 3/8 in (9.5 mm) 7250 psi (345 bar, 3.45 MPa)
248120	Dual hose bundles, 1/2 in & 3/8 in (12.7 & 9.5 mm) 7250 psi (345 bar, 3.45 MPa)
248121	Dual hose bundles, 3/8 in & 1/4 in (9.5 & 6.3 mm) 7250 psi (345 bar, 3.45 MPa)

Electric Heated Hose (Not approved for explosive atmospheres), 5000 psi (345 bar, 34.5 MPa) 50 ft (15 m)

24P616	Hose heat control box. 1 zone, 230 VAC, 15A. Controls up to 200 ft of dual hose. Ref manual 310798.
15E750	Hose A, ID 1/4 in (6.3 mm) Dash 5 JIC fittings, (1/2-20 thread)
15E751	Hose A, ID 3/8 in (9.5 mm) Dash 5 JIC fittings, (1/2-20 thread)
15E752	Hose B, ID 3/8 in (9.5 mm) Dash 6 JIC fittings, (9/16-18 thread)
248907	Hose Set, ID 1/4(A) x 3/8(B) (6.3 x 9.5 mm) Dash 5 on "A", Dash 6 on "B"
248908	Hose Set, ID 3/8(A) x 3/8(B) (9.5 x 9.5 mm) Dash 5 on "A", Dash 6 on "B"

Static Mixing, 7250 psi (500 bar, 50 MPa)

248925	1/4 in x 12 ft (3.6 mm) whip hose mixing kit, includes (2) 15E592 housings and 6 mix chemicals
262478	Static mix housing kit, 1/2 in x 5 in (12 mm x 127 mm) 7250 psi. Uses 248927 mix elements
248927	25-pack, disposable, 1/2 in (12 mm), 12 element acetel sticks fit 15E592 housing
511352	Static mixer, 7250 psi (500 bar, 50.0 MPa), MxM, 3/8 npt x 9.5 in npt (9.5 mm x 241 mm), 12 welded set elements, SST



Protect your investment! Scuff Guard provides extra protection and prolongs the life of your hose. Available in two sizes and fabrications.

246078	Scuff Guard, 50 ft (15.2 m) braided polyester mesh. Blue 2.5 in nominal diameter
246456	Scuff Guard, 50 ft (15.2 m) polyethylene (6 mil) clear tubing 5 in diameter
16T138	Reusable Scuff Jacket with hook and loop fastener, 50 ft (15.2 m)

Pump Lowers - Built to last

With Graco's pump lowers, you can easily customize your sprayer for various coatings without purchasing an additional sprayer. Our quick knockdown pump lowers allow for easy maintenance and repair, reducing downtime so you can finish each job faster. The parts inside the lower are designed and tested for longevity and are proven to withstand more cycles than non-Graco pumps.



Ordering Information

Xtreme Lowers for Xtreme Sprayers

Part #	Output per cycle (cc)	Packing	Filter	Rod	Cylinder	Rebuild Kits*	Part #	Output per cycle (cc)	Packing	Filter	Rod	Cylinder	Rebuild Kits*
L085C1	85	Xseal_LTH	None	24B819	15F682	24F973	L180C3	180	Tuff-Stack (5)	None	24B822	197316	24F970
L085C2	85	Xseal_LTH	Built-In	24B819	15F682	24F973	L180C4	180	Tuff-Stack (5)	Built-In	24B822	197316	24F970
L085C3	85	Tuff-Stack (5)	None	24B819	15F682	262507	L220C1	220	Xseal_LTH	None	24B823	197317	24F967
L085C4	85	Tuff-Stack (5)	Built-In	24B819	15F682	262507	L220C2	220	Xseal_LTH	Built-In	24B823	197317	24F967
L115C1	115	Xseal_LTH	None	24B820	15F656	24F972	L220C3	220	Tuff-Stack (5)	None	24B823	197317	24F968
L115C2	115	Xseal_LTH	Built-In	24B820	15F656	24F972	L220C4	220	Tuff-Stack (5)	Built-In	24B823	197317	24F968
L115C3	115	Tuff-Stack (5)	None	24B820	15F656	262508	L250C1	250	Xseal_LTH	None	24B824	197318	24F965
L115C4	115	Tuff-Stack (5)	Built-In	24B820	15F656	262508	L250C2	250	Xseal_LTH	Built-In	24B824	197318	24F965
L145C1	145	Xseal_LTH	None	24B821	197315	24F971	L250C3	250	Tuff-Stack (5)	None	24B824	197318	24F966
L145C2	145	Xseal_LTH	Built-In	24B821	197315	24F971	L250C4	250	Tuff-Stack (5)	Built-In	24B824	197318	24F966
L145C3	145	Tuff-Stack (5)	None	24B821	197315	262510	L290C1	290	Xseal_LTH	None	24B825	197319	24F963
L145C4	145	Tuff-Stack (5)	Built-In	24B821	197315	262510	L290C2	290	Xseal_LTH	Built-In	24B825	197319	24F963
L180C1	180	Xseal_LTH	None	24B822	197316	24F969	L290C3	290	Tuff-Stack (5)	None	24B825	197319	24F964
L180C2	180	Xseal_LTH	Built-In	24B822	197316	24F969	L290C4	290	Tuff-Stack (5)	Built-In	24B825	197319	24F964
							244849	Connection Kit. Includes tie rods and coupler to adapt Xtreme lower to King, Senator® or Bulldog® motors					

* Includes seals for both old and new series filter caps.

Sprayer Packings – Optimize the performance of your pump

Packings play a critical role in optimizing spray performance by sealing pressure and holding material inside the pump. The tighter the seal, the better the performance. Graco packings feature two material constructions. UHMWPE (Ultra-high-molecular-weight polyethylene) is a durable, high-impact resistant material, used in such products as bulletproof safety vests. PTFE (Polytetrafluoroethylene) is a non-stick coating that can withstand extreme heat and is well-known for its use in cookware. Consult your manual for proper packing order.



Xtreme® Seals

Contains 3 UHMWPE and 2 leather packings

- Ideal for abrasive materials
- Standard in Graco Xtreme NXT Spray Packages



Tuff-Stack™

Contains 5 carbon-filled PTFE packings

- Excellent for chemical resistance and high temperature applications
- Not ideal for abrasive materials
- Won't swell in solvent
- Won't stick to piston



X-Tuff®

Contains 3 UHMWPE and 2 carbon-filled PTFE packings

- Ideal for chemical resistance and durability in applications below 140°F (60°C)
- Standard in Graco XP™ Plural Component Spray Packages

Ordering Information

Repair Kits

Xtreme® Seals

Part #	Lower	Part #	Lower
24F973	85cc	24F967	220cc
24F972	115cc	24F965	250cc
24F971	145cc	24F963	290cc
24F969	180cc		

Tuff-Stack™

Part #	Lower	Part #	Lower
262504	36cc	262510	145cc
24F505	48cc	24F970	180cc
24F506	58cc	24F968	220cc
24F507	85cc	24F966	250cc
24F508	115cc	24F964	290cc

X-Tuff™

Part #	Lower	Part #	Lower
262786	36cc	262777	97cc
262787	48cc	262790	115cc
262774	54cc	262791	145cc
262788	58cc	262792	180cc
262775	72cc	262793	220cc
262789	85cc	262794	250cc
262776	90cc	262795	290cc

Xtreme NXT Sprayer Accessories



Part #	Description
288347	Hopper Feed Kit
255143	Wall-Mount Bracket
245132	Xtreme Floor-Stand Kit
NXT107	NXT Air Motor Valve – fits all three sizes
262230	External Air Controls for Lightweight Xtreme Package Carts
262231	External Air Controls for Heavy-Duty Xtreme Package Carts
NXT112	De-Ice Control Knob (5-Pack)
NXT102	De-Ice Control Repair Kit
NXT107	Replacement Poppet Valve Kit
181072	Round Suction Tube Strainer
191635	Tube Strainer
245176	Suction Kit, Replaces OEM Suction Assembly (6 ft, 1.8 m hose)
288687	Suction Kit, Wall Mount Version (10 ft, 3 m hose)
245136	55 gal (200 l) suction tube extension,
245190	Inlet Ball Spring Load Kit: 145cc, 180cc
245191	Inlet Ball Spring Load Kit: 220cc, 250cc, 290cc
245127	Carbide piston ball for 145 or 180 cc lower, 3-pack
244841	Lubricator – NXT Air Motor
206995	TSL, 1 qt (0.9 L)

DataTrak™



Graco's exclusive DataTrak control kit collects information about the performance of your Xtreme NXT sprayer, including pump diagnostics and material usage. It also offers protection against motor runaway in the event of a problem or accident.

NXT206	DataTrak Upgrade Kit for the NXT 2200
NXT306	DataTrak Upgrade Kit for the NXT 3400
NXT606	DataTrak Upgrade Kit for the NXT 6500

Pump Lower Fluid Filters



Fluid Filter Elements

Used with 85cc and 115cc:

236495	30 mesh (595 micron), 2-pack
238444	30 mesh (595 micron), 25-pack
236496	60 mesh (250 micron), 2-pack
238446	60 mesh (250 micron), 25-pack
236497	100 mesh (149 micron), 2-pack
238448	100 mesh (149 micron), 25-pack

Used with 145cc, 180cc, 220cc, 250cc, 290cc:

224458	30 mesh (595 micron), 2-pack
238436	30 mesh (595 micron), 25-pack
224459	60 mesh (250 micron), 2-pack
238438	60 mesh (250 micron), 25-pack
224468	100 mesh (149 micron), 2-pack
238440	100 mesh (149 micron), 25-pack

Filter Support

186075	Poly filter support
179801	Carbon steel filter support

Filter Cap Conversion Kit

24F975	For 85-290cc lowers – Ref. manual 406882
--------	--

Ball Valves (Ref. manual 306861)*



- 102644 3000 psi (207 bar, 20.7 MPa) cs, inlet: 3/4 npt (f), outlet: 3/4 npt (f), PTFE seals, nylon seats
 - 102646 3000 psi (207 bar, 20.7 MPa) cs, inlet: 1/2 npt (f), outlet: 1/2 npt (f), PTFE seals, nylon seats
 - 218901 5000 psi (345 bar, 34.5 MPa) cs, inlet: 1/4 npsm (m), outlet: 3/4 unf (m), PTFE seals, JIC-8 outlet
 - 239018 5000 psi (345 bar, 34.5 MPa) ss, inlet: 1/4 npt (m), outlet: 1/4 npt (m), PTFE seals, nylon seat
 - 223959 5000 psi (345 bar, 34.5 MPa) cs, inlet: 3/8 npt (m), outlet: 1/4 npt (m), PTFE seals, nylon seats
 - 248271 5000 psi (345 bar, 34.5 MPa) ss, inlet: 1/4 npt (m), outlet: 1/4 npt (m), PTFE seals, nylon seats
 - 235992 5000 psi (345 bar, 34.5 MPa) ss, inlet: 3/8 npt (m), outlet: 1/4 npt (m), PTFE seals, nylon seats
 - 238635 5000 psi (345 bar, 34.5 MPa) cs, inlet: 1/4 npt (m), outlet: 1/4 npt (m), fluoroelastomer seals, nylon seats
 - 210659 5000 psi (345 bar, 34.5 MPa) cs, inlet: 1/4 npt (m), outlet: 3/8 npt (m), fluoroelastomer seals, nylon seats
 - 214037 5000 psi (345 bar, 34.5 MPa) cs, inlet: 1/4 npt (m), outlet: 1/4 npt (m), PTFE seals, nylon seats
 - 223960 5000 psi (345 bar, 34.5 MPa) cs, inlet: 3/8 npt (m), outlet: 3/8 npt (m), PTFE seals, nylon seats
 - 210657 5000 psi (345 bar, 34.5 MPa) cs, inlet: 1/4 npt (m), outlet: 1/4 npt (m), fluoroelastomer seals, nylon seats
 - 210658 5000 psi (345 bar, 34.5 MPa) cs, inlet: 3/8 npt (m), outlet: 3/8 npt (m), fluoroelastomer seals, nylon seats
 - 262739 7250 psi (500 bar, 50 MPa) 1/2 in (13 mm) - with handle
 - 262740 7250 psi (500 bar, 50 MPa) 1/2 in (13 mm) - no handle
 - 237304 7400 psi (5105 bar, 515 MPa) cs, inlet: 3/8 npt (m), outlet: 3/8 npt (m), PTFE seals, PEEK seats
 - 237303 7400 psi (5105 bar, 515 MPa) cs, inlet: 1/4 npt (m), outlet: 1/4 npt (m), PTFE seals, PEEK seats
- *Repair kits also available, Ref. manual 406882



Inlet Strainers and Suction Tubes

- 245136 55 gal (200 l) suction tube extension kit
- 109534 Strainer suction-line, 3/8 npt (f), 20 mesh, sst
- 241576 Suction tube kit w/ 6 ft (1.8 m) hose. Xtreme sprayer kit
- 181072 Strainer, inlet, 1 in npsm (f), 8 mesh internal, 16 mesh external, SST. Fits Xtreme sprayer suction kit
- 249024 1 in (25 mm) inlet "Y" strainer kit (w/ball valve)
- 248970 3/4 in (19 mm) inlet "Y" strainer kit (w/ball valve)



Supply Pump Kits and Accessories

- 256276 5:1 hopper feed pump kit - for use with 20 gal (76 l) hoppers - Ref. manual 312769
- 256433 10:1 feed pump w/hose and regulator kit - Ref. manual 312769
- 248825 Monark® 5:1, with 10 ft (3.0 m) hose, regulator kit - Ref. manual 310863
- 248885 Monark 23:1, pail-mount, with 50 ft (15.3 m) hose - Ref. manual 310863
- 248826 Monark 23:1, wall or cart mount, with 50 ft (15.3 m) hose - Ref. manual 310863
- 256275 T2 2:1 hopper feed pump kit - for use with 20 gal (76 l) hoppers - Ref. manual 312769
- 295616 T2 transfer pump, 2.25:1, 5.0 gpm, (19 lpm) - Ref. manual 311882
- 246081 Complete T2 supply pump system, plural component - Ref. manual 311882
- 248829 Feed pump regulator kit - Ref. manual 310863





Elbow Fitting

- 100840 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 npt (f), Street, 90
- 164259 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 1/4 npt (f), Street, 90
- 155699 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (f), Street, 90
- 166999 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/4 npt (f), Street, 90
- 158683 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 1/2 npt (f), Street, 90



Elbow

- 100840 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/2 npt (f), Street, 60



Nipple

- 166606 7000 psi (483 bar, 48.3 MPa), 3/4 npt (m), 3/8 npt (m), 4 1/2 in, Reducing, hex
- 158979 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 3/8 npt (m), 2 3/4 in, Reducing, hex
- 164672 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 1/4 npsm, 1 3/8 in, Reducing, hex
- 156877 7250 psi (5010 bar, 50 MPa), 1/2 npt (m), 1/2 npt (m), 2 1/2 in, Reducing, hex
- 160790 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (m), 3 5/8 in, Reducing, hex
- 156849 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (m), 1 1/2 in, Reducing, hex
- 156850 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (m), 2 1/2 in, Reducing, hex
- 166846 7250 psi (500 bar, 50 MPa), 1/4 npt (m), 1/4 nps (m), Reducing, hex, SST
- 157129 7250 psi (500 bar, 50 MPa), 3/4 npt (m), 3/8 npt (m), 3 1/4 in, Reducing, hex
- 158491 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 1/2 npt (m), 1 5/8 in, Reducing, hex
- 162449 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 1/4 npt (m), 1 5/8 in, Reducing, hex
- 159239 7400 psi (510 bar, 51 MPa), 1/2 npt (m), 3/8 npt (m), 1 5/8 in, Reducing, hex
- 162453 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 nps (m), 1 1/5 in, Reducing, hex
- 156971 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 npt (m), 1 3/8 in, Reducing, hex
- 196181 7500 psi (517 bar, 51.7 MPa), 1/4 npt (m), 1/4 nps (m), 1 1/5 in, nickel plated, Reducing, hex
- 192593 8000 psi (552 bar, 55.2 MPa), 3/4 npt (m), 1/2 nps (m), 2 3/4 in, Reducing, hex, SST
- 164856 8000 psi (552 bar, 55.2 MPa), 3/8 npt (m), 1/4 npt (m), 1 5/8 in, Reducing, hex
- 165198 10000 psi (690 bar, 69 MPa), 3/8 npt (m), 1/4 npt (m), 1 3/4 in, Reducing, hex



Tee

- 15R875 7250 psi (500 bar, 50 MPa), 1/4 npt (m), 1/4 npt (f), 1/4 npt (f), (mxf) run (f) branch
- 15R874 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (f), 3/8 npt (f), (mxf) run (f) branch
- 15R873 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/2 npt (f), 1/2 npt (f), (mxf) run (f) branch



Unions and Swivels

- 114339 5000 psi (345 bar, 34.5 MPa), (mxf), 1/4 npt (m), 1/4 npsm (f), SST
- 207152 7250 psi (500 bar, 50 MPa), (fxf), 3/8 npt (f), 3/8 npsm (f)
- 155865 7250 psi (500 bar, 50 MPa), (fxf), 1/2 npt (f), 1/2 npsm (f)
- 156684 7250 psi (500 bar, 50 MPa), (mxf), 1/2 npt (m), 1/2 npsm (f)
- 156173 7400 psi (510 bar, 51 MPa), (fxf), 3/8 npt (f), 3/8 npsm (f)
- 157705 7500 psi (517 bar, 51.7 MPa), (mxf), 1/4 npt (m), 3/8 npsm (f)
- 155665 7500 psi (517 bar, 51.7 MPa), (mxf), 3/8 npt (m), 3/8 npsm (f)
- 235208 7500 psi (517 bar, 51.7 MPa), (mxf), 3/8 npt (m), 3/8 npsm (f), SST
- 162505 7500 psi (517 bar, 51.7 MPa), (mxf), 3/8 npt (m), 1/2 npsm (f)
- 158256 7500 psi (517 bar, 51.7 MPa), (mxf), 1/2 npt (m), 3/8 npsm (f)
- 155570 10000 psi (690 bar, 69 MPa), (fxf), 1/4 npt (f), 1/4 npsm (f)
- 156823 10000 psi (690 bar, 69 MPa), (mxf), 1/4 npt (m), 1/4 npsm (f)
- 236987 Hose swivel, 7250 (500 bar, 50 MPa), (mxf) 1/4 npsm (m), 1/4 npsm (f), SST
- 189018 Gun swivel, 7500 psi (517 bar, 51.7 MPa), (mxf) 1/4 npsm (m), 1/4npsm (f), nickel plated





Reducing Bushings

- 159841 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 1/4 npt (f)
- 100206 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 1/4 npt (f)
- 121433 7250 psi (500 bar, 50 MPa), 1/2 npt (m), 3/8 npt (f)



Coupling

- 113093 7250 psi (500 bar, 50 MPa), 1/4 npt (f), 1/4 npt (f)
- 162024 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 3/8 npt (f)
- 158581 7250 psi (500 bar, 50 MPa), 1/2 npt (f), 1/2 npt (f)



Coupling Adapter

- 150286 7250 psi (500 bar, 50 MPa), 3/8 npt (m), 3/8 npt (f). Used for inlet of 15E592 mix tube.
- 15B729 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 3/8 npsm (m)
- 150287 7250 psi (500 bar, 50 MPa), 3/8 npt (f), 1/4 npt (m)



Plug

- 100721 7250 psi (500 bar, 50 MPa), 1/4 npt, hex, socket, short
- 101754 7250 psi (500 bar, 50 MPa), 3/8 npt, hex, socket, short
- 100361 7250 psi (500 bar, 50 MPa), 1/2 npt, hex, socket, short



Hoppers

- 234097 7.5 gal (28 l) green fluid tank. Includes cover, seal, 1 in npt (m) outlet fitting
- 234017 7.5 gal (28 l) blue fluid tank. Includes cover, seal, 1 in npt (m) outlet fitting
- 255963 Hopper, double wall, 20 gal (76 l) - Ref. manual 312747
- 256257 Double wall 20 gal (76 l) hopper heater kit, 240V, includes 12 ft (3.6m) cable - Ref. manual 312747
- 256512 Desiccant kit-for use with 20 gal (76 l) hoppers, dries incoming air - Ref. manual 406739
- 256274 Twistork agitator kit - for use with 20 gal (76 l) hoppers - Ref. manual 312769

High Pressure Viscon® Fluid Heaters, Non-Hazardous Location

Ref. manual 309524



- 245867 120 VAC, 2300 watts, 19.2 amps
- 245868 200 VAC, 4000 watts, 20.0 amps
- 245869 240 VAC, 4000 watts, 16.7 amps
- 245870 480 VAC, 4000 watts, 8.3 amps
- 246276 380 VAC, 4000 watts, 10.5 amps

High Pressure Viscon Fluid Heaters, Hazardous Location

Ref. manual 309524



- 245848 120 VAC, 2300 watts, 19.2 amps
- 245862 200 VAC, 4000 watts, 20 amps
- 245863 240 VAC, 4000 watts, 16.7 amps
- 246254 380 VAC, 4000 watts, 10.5 amps
- 245864 480 VAC, 4000 watts, 8.3 amps



AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88 -11th Avenue N.E.
Minneapolis, MN 55413

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000 Fax: 612-623-6777

EUROPE

BELGIUM

Graco BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
B-3630 Maasmechelen,
Belgium
Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South,
Huangpu District
Shanghai, 200011
The People's Republic of China
Tel: 86 21 649 50088 Fax: 86 21 649 50077

INDIA


Graco India Private Limited
4th Floor
Augusta Point
Sector 53, Golf Course Road
Gurgaon, Haryana, India 122001
Tel: 91 124 435 4208 Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300 Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400 Fax: 82 31 476 9801

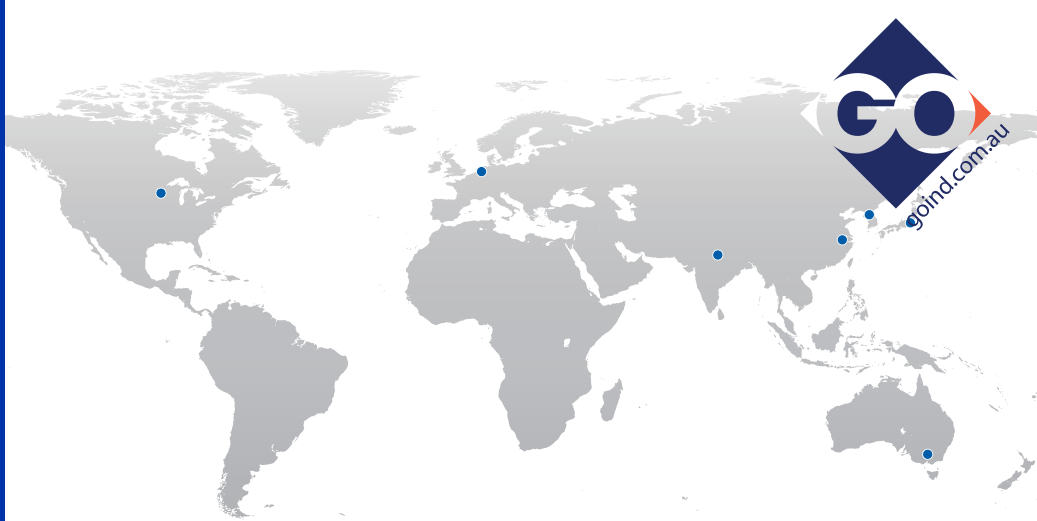

Graco Has You Covered

Facilities Worldwide for Global Support



Quality First

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry. We provide you with world-class customer support and expertise to help solve your application challenges.



Global Reach

Graco has facilities across the globe to provide you with the products and service you need, where you live. Plus, Graco has dedicated field experts in all areas of the world to support the products we sell.



Product Capabilities

Graco has a broad range of products that are engineered and tested to perform in the harshest environments so you can be certain your equipment is protected and working at peak performance.



Contact us today!

Call **866-361-5959** to talk with a Graco representative,
or visit www.graco.com for more information.

