



SANKI

SK52QF111AD Adblue Dispenser




- Customer Friendly Operation
- Precise Metrology Equipment
- High Performance Hydraulic & Electronic Components
- Available as a dispenser only
- Suitable for Adblue
- Works well in harsh Australian conditions
- NMI & ANZEX Compliant
- Dual Unit available on request



Technical Specifications

| | |
|-----------------------------------|---|
| Accuracy | ± 0.25% |
| Flow Rate | 30L/min |
| Ambient Temperature | -25°C ≈ +55°C |
| Relative Humidity | 0% - 95% |
| Unit Noise Rate | < 70dB |
| Communication Protocols Supported | Sanki RS485, NZPP (PEC/Compac), Gilbarco* |
| Power Supply | AC 220V, AC380V (-15% ≈ +10%) |
| Sale Digits | 7 (0.00 – 99999.99) Decimal Adjustable |
| Volume Digits | 6 (0.00 – 9999.99) Decimal Adjustable |
| Unit Price Digits | 5 (0.00 – 999.99) Decimal Adjustable |
| NMI Approval Number | 5-6A-231 |

*Contact us to confirm controller compatibility

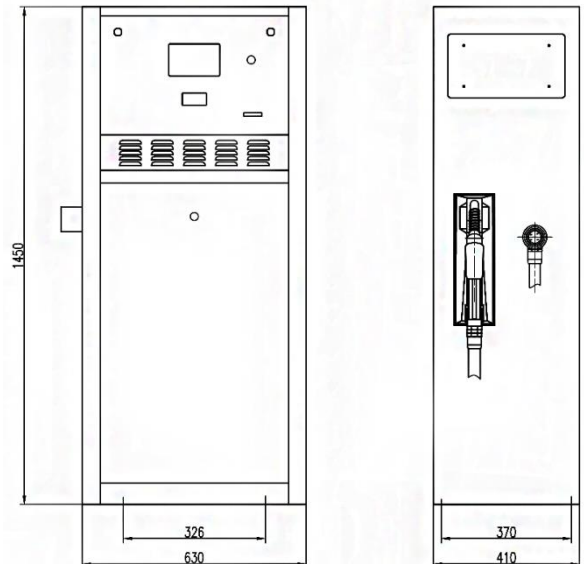

Models

| Model | Type | Nozzles | Products | Flow Meters | Displays | Package Size (mm) | Gross Weight | Unit Size (mm) |
|--------------|-----------|---------|----------|-------------|----------|-------------------|--------------|------------------|
| SK52QF111-AD | Dispenser | 1 | 1 | 1 | 2 | 768 * 546 * 1570 | 104kg | 630 x 410 x 1450 |

Footprint

