

# Glazing Nozzle Kits

406902B

Finex™ Mini Gravity Feed Guns (1 mm Nozzles)

ENG



### Important Safety Instructions

Read all warnings and instructions in manual 312388. Save all instructions.

## Kit 24F733


Ref.	Description	Qty.
101	NOZZLE, glazing	1

## Kit 24F734



Ref.	Description	Qty.
102	AIR CAP, for glazing nozzle	1
103	O-RING	1

## Installation


1. Remove air cap (A), nozzle (B), and air distributor (C) from Mini-Finex gun.

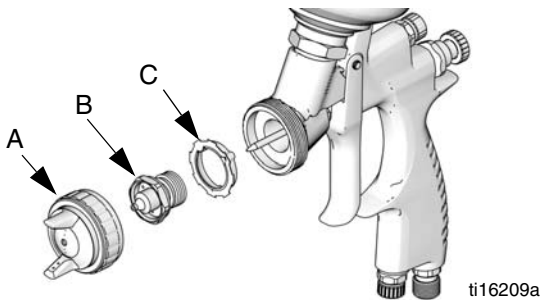

3. If air cap is to be used, install o-ring (103) in air cap (102). Tighten air cap onto gun. Be sure to fully seat the air cap on the gun so the o-ring will form to the gun body.



2. Turn fluid control knob (D) counterclockwise until fully open. Screw glazing nozzle (101) into gun and tighten.

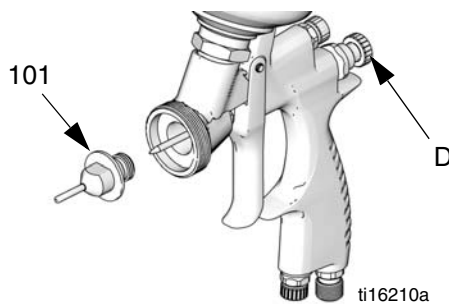

## Operation

**Kit 24F733 only:** Gun will function as a gravity feed dispenser.

**Kit 24F733 + Kit 24F734:** Addition of the air cap causes gun to spatter the fluid for more area coverage. Use only as much air pressure as needed. Do not exceed 30 psi at the gun inlet. Excessive air pressure will cause significant overspray and material waste.

Graco Inc. P.O. Box 1441 Minneapolis, MN 55440-1441

Original instructions. This manual contains English. MM 406902

Copyright 2010, Graco Inc. is registered to ISO 9001

Revised 12-2010