



# OWNER'S MANUAL

## PRODUCT CODE: 1036T/1037T/1038T

### ULTRASONIC PARTS CLEANER



Product Code	Tank Size (mm)	Unit Size (mm)	Volume (L)	Ultrasonic Power	Ultrasonique Frequency	Heating Power
1036T	300x155x150	330x180x310	6	150W	40kHz	300W
1037T	330x300x150	360x330x310	13	300W	40kHz	400W
1038T	500x300x200	550x330x360	27	500W	40kHz	500W

**WARNING**

**IMPORTANT: READ ALL INSTRUCTIONS BEFORE USE**



The instructions and warnings contained in this manual should be read and understood before using or operating this equipment. Do not allow anyone to use or operate this equipment until they have read this manual and have developed a thorough understanding of how this equipment works. Failure to observe any of the instructions contained in the manual could result in severe personal injury to the user or bystanders, or cause damage to the equipment and property. Keep this manual in a convenient and safe place for future reference.

Whilst every effort has been made to ensure accuracy of information contained in this manual, the TQB Brands Pty Ltd policy of continuous improvement determines the right to make modifications without prior warning.

**CONTENT**

WARNING .....	2
CONTENT .....	2
SAFETY INSTRUCTIONS .....	3
ASSEMBLY, OPERATION, PREVENTITIVE MAINTENANCE .....	4
WARRANTY .....	9

## SAFETY INSTRUCTIONS



### SAFETY OPERATING INSTRUCTIONS

While the machine is working normally, ultrasonic and tank syntonny gives a well-proportioned sound, and no shudder on the surface of the water, yet there is spray made by the tiny bubbles. If there are discontinuous surges, please add or release a little of washing solution in the tank, stopping the surges is better for the objects cleaning.

Please read the following very carefully as failure to comply may invalidate your guarantee.


- ✖ DO NOT run the cleaner continuously for more than 30 minutes at a time, as doing so can damage the internal components.
- ✖ DO NOT operate the unit without fluid in the tank. Always ensure the fluid is no higher than the max mark. Always ensure there is a minimum depth of 7cm.
- ✖ DO NOT drop any item into the tank as this may cause damage to the transducer.
- ✓ Always place the items gently into the tank and use the basket whenever possible.
- ✓ The more items that you place in your cleaning bath the less efficient it will clean. It is not advised to overlap items. Always allow plenty of clear space between the items.
- ✓ Keep the lid on during use. This will prevent splashes and reduce evaporation of the fluid.
- ✓ Always wear suitable protective clothing, gloves and goggles.
- ✖ DO NOT immerse the machine or power cord in water or other liquid.
- ✖ DO NOT touch the unit if the machine has fallen into water during operation. Remove the power plug from the socket first.
- ✓ UNPLUG the power source while filling or emptying the tank.
- ✖ DO NOT spray water or liquid over the device and the control panel
- ✖ DO NOT operate the cleaner without proper grounding.
- ✖ DO NOT place the device on a soft surface, where the vents could be blocked.
- ✓ Upon completion of the cleaning cycle, turn the heater dial off and isolate the machine from the electrical supply.
- ✓ Take care when adding or removing items from the cleaning tank as the fluid is likely to be hot and displaced fluid can damage the internal components. Any displaced fluid must be dried up immediately.
- ✓ In the event of failure/emergency, disconnect the mains supply by removing the plug from the mains socket.
- ✓ When servicing, use only Tradequip identical replacement parts. Use of any other parts will void the warranty. Ensure the Ultrasonic Parts Cleaner is disconnected from power before servicing.
- ✓ Use the right product for the job. There are certain applications for which the Ultrasonic Parts Cleaner was designed. Do not modify the Ultrasonic Parts Cleaner and do not use the Ultrasonic Parts Cleaner for a purpose for which it was not intended.

# ASSEMBLY, OPERATION, PREVENTITIVE MAINTENANCE

## 1. FEATURES

The Tradequip Ultrasonic Parts Cleaner.

- Normal and soft power control to resolve the cleaning blind spot.
- Stainless steel housing, tank and lid.
- Pressed tank without welded joints for better waterproof.
- Cooling fan.
- Moisture-proofed PCB.
- Industrial grade IC & ultrasonic transducer.



Ultrasonic cleaning is based on the cavitation effect caused by high frequency ultrasonic wave vibration signal in the fluid. Microscopic bubbles are formed, and they implode violently causing the cavitation which creates an intense scrubbing action on the small enough to penetrate microscopic crevices, cleaning them thoroughly and consistently. Ultrasonic cleaning is extremely effective at removing dirt and grime which would normally require tedious manual cleaning by hand. This unit can be used to clean a wide variety of instruments and mechanical parts such as carburettors, returning them to almost “like new” condition without damage to delicate parts.

## 2. ASSEMBLY

**Unpacking:** after removing the packing material, make sure the product is in perfect condition and that there are no visible damaged parts. The packaging materials (Polyethylene bags, polystyrene etc.), must be disposed of in an appropriate refuse collection container. Recycle cardboard.

1. Place the cleaner on a flat, clean surface where the cooling fans will receive adequate ventilation and ensure all controls are set to off.
2. Ensure the drain tap is in the closed position.
3. Ensure the power lead is securely plugged into the cleaner and that no part of the lead is likely to come into contact with moisture.
4. Carefully fill at least 1/2 of the tank with a solvent solution. For demanding cleaning we recommend a small amount of washing up liquid, this will help increase the cleaning performance. The cleaner is now ready for use.

### Contents:

Main Machine, Lid, Power Cord, Outlet Filter, Mesh Basket.

### 3. BEFORE USE

Prior to each use conduct a visual inspection by checking for abnormal conditions, such as cracked joins and damaged, loose, or missing parts.

#### ***Items Not Suitable for Ultrasonic Cleaning***

Soft Jewellery: Pearls, emerald, ivory, coral. Agate, sea turtle shells, etc.

Welded, Plated and Glued Items: Welded or plated metal items, glued items.

Watches: Except diver's watches with depth rating over 50m(150ft).

Others: Ceramic, camera filters with pre-existing cracks.

#### **Cleaning Solutions:**

**WARNING :** Strong acid or alkaline cleaning solution will cause corrosion, rust and even puncture of tank or machine body. To overcome this problem, dilute to mild PH solution or request for tank made of specific grade of stainless steel like SUS304.

*\*Warning: For use with aqueous (water) based solutions only. Petroleum based cleaning fluids are harmful and will damage the pump and void the warranty.*




#### 4. OPERATION

1. Select your cleaning solution; fill at least  $\frac{1}{2}$  of solution into the tank. Do not exceed the filling line. **Note: Do not use alcohol, gasoline or flammable solutions.** Doing so could cause a fire or explosion. Use only water-based solutions.
2. Place the items into a basket, then slowly lower the basket into tank. Do not allow items to contact the tank bottom (solution should cover the items).

Power switch (C) - Plug the machine into grounded outlet.


Turn on the power switch on back side of the machine. The timer and heating indicator light up.

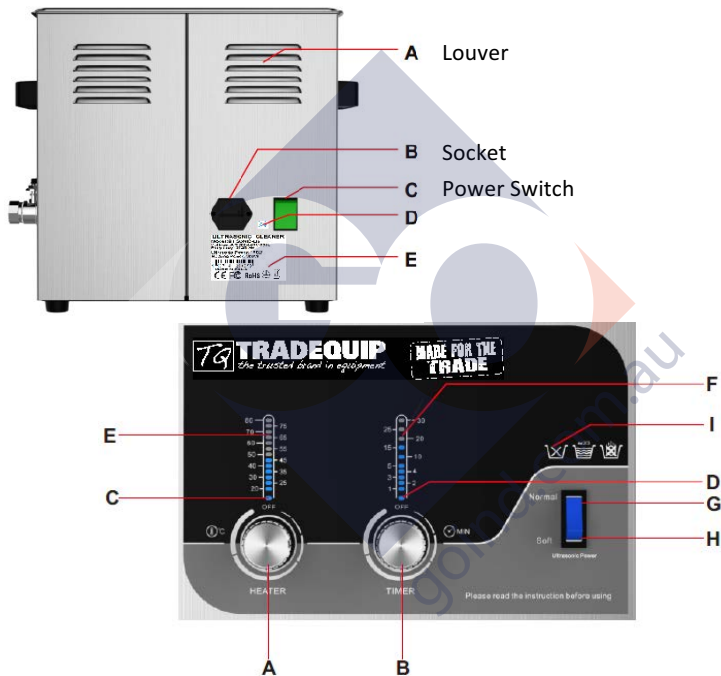

3. Select Ultrasonic power Normal or Soft (G & H) to suit item to be cleaned. Normal power (G) operates at 100% and Soft power (H) operates at 50% for delicate applications.
4. Turn the "Heater" dial (A) clockwise to adjust the heating temperature from 20°C to 80°C. The pre-set temperature light will illuminate for 3 seconds to start heating, the LED light bar will display the ambient temperature and rise until the desired temperature is reached. Heating will automatically stop, the light of the pre-set temperature will continue to blink, the LED light bar below the pre-set temperature all light off and heating indicator light up.
5. Turn the 'Heater' dial anti clockwise to reduce the temperature. To stop heating, turn the dial anti clockwise to off until heating indicator light up again.

**Note:**

- The temperature control has 13 increments> 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80°C.
- Heating will automatically start again when the actual temperature drops 3°C below the pre-set temperature.
- To achieve the best cleaning result, the recommended solution temperature is 40°C-60°C. Warm water and dish washing liquid can soften grease and improve cleaning result.
- If the pre-set temperature is below the ambient temperature, the heating will not start.

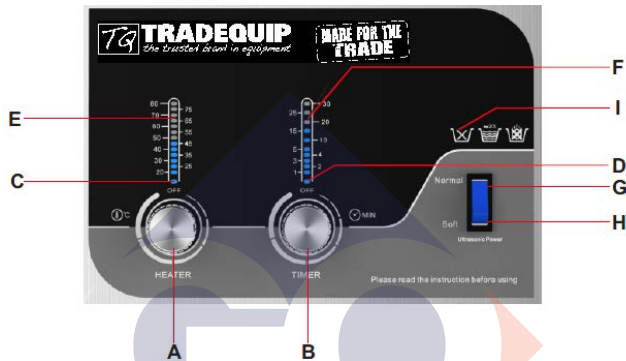

6. Turn the “Timer” dial (B) clockwise to set timer from 0-30 minutes. The pre-set timer light will blink for 3 seconds and LED light bar below pre-set timer will illuminate.
7. As cleaning cycle is completed, the timer indicator will diminish.
8. Turn the dial counter-clockwise to reduce the ultrasonic cleaning cycle time.
9. To stop ultrasonic immediately, turn dial counter-clockwise to off.

**Note:** Timer 9 increments from 1, 2, 3, 4, 5, 15, 20, 25, 30mins

10. **Commence Operation:** Once the timer has been set the Ultrasonic Parts Cleaner will start operating.

**Note:** During ultrasonic cleaning cycle, you should notice a “sizzling” noise. This is normal and means the cleaner is working correctly.

11. **Cease Operation:** When the cleaning cycle is complete turn the Timer Dial and the Heating Dial to the “OFF” position, the Ultrasonic Parts Cleaner will stop operating and the timer and heating indicator will illuminate.

12. **Clean Up:** Turn off the power switch on the back of the machine. Unplug the power cord, open the lid and retrieve the basket and the items. Empty the tank and clean both the outside and inside of the machine with clean and dry cloth for next use. Keep the drainage valve closed.

13. Cleaning Options:

General Cleaning: Use only tap water at an operating temperature of 50°C .

Enhanced Cleaning: Add a few drops of standard washing up liquid, liquid soap, or detergent into the water. Other non-acidic cleaning agents can also be used.

**Note:** Any spillages should be mopped up immediately, to minimise safety hazards.

## 5. STORAGE

This Ultrasonic Parts Cleaner should always be stored in a dry location on a level surface. Disconnect 240V power supply and empty the cleaning fluid into a separate container.

## 6. MAINTENANCE

Disconnect power prior to any maintenance

Inspect the general condition of the Ultrasonic Parts Cleaner checking:

- For loose hardware
- Misalignment of binding or parts, cracked, bent, or broken parts, and
- Any other condition that may affect the Ultrasonic Parts Cleaners safe operation

## 7. SERVICE & REPAIR

Any Ultrasonic Parts Cleaner found damaged in any way, or found to be worn or operates abnormally should be removed from service until repaired by an authorised service agent. Owners and / or operators should be aware that repair of this product may require specialised equipment and knowledge. Only authorised parts, labels and decals shall be used on this equipment. Annual inspection of the Ultrasonic Parts Cleaner is recommended and can be made by an authorised repair facility to ensure that your equipment is in optimum condition and that the equipment has the correct decals and safety labels specified by the manufacturer.



## WARRANTY

Tradequip products have been carefully tested and inspected before shipment and are guaranteed to be free from defective materials and workmanship for a period of 12 months from the date of purchase except where tools are hired out when the guarantee period is ninety days from the date of purchase.

Should this piece of equipment develop any fault, please return the complete tool to your nearest authorised warranty repair agent or contact TQB Brands Pty Ltd Warranty team – [warranty@tqbbrands.com.au](mailto:warranty@tqbbrands.com.au).

If upon inspection it is found that the fault occurring is due to defective materials or workmanship, repairs will be carried out free of charge. This guarantee does not apply to normal wear and tear, nor does it cover any damage caused by misuse, careless or unsafe handling, alterations, accident, or repairs attempted or made by any personnel other than the authorised TQB Brands Pty Ltd repair agent.

This guarantee applies in lieu of any other guarantee expressed or implied and variations of its terms are not authorised.

Your TQB Brands Pty Ltd guarantee is not effective unless you can produce upon request a dated receipt or invoice to verify your proof of purchase within the 12 month period.

### Consumer Guarantee

Our goods come with a guarantee that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.



TQB Brands Pty Ltd 1/40 Metrolink Circuit Campbellfield Vic 3061

Another great product "Made for the Trade"



# GARAGE EQUIPMENT

Product Code: 5126

Rechargeable

## Worklight

The Tradequip Underbonnet LED Worklight is Designed for use in professional workshops, the Tradequip Underbonnet Folding LED Worklight features 40, super high-intensity LED's for maximum light output. It offers 0° to 180° angle of adjustment, 180° Individual tube rotation, spring-loaded hooks & 3 function switch for maximum versatility. This light has the option of the 240V wall charger with a 2m cord, 12V Cig Lighter charger with a handy 4m cord. This very versatile worklight can also be operated for long periods whilst connected via the 12V Cig Lighter socket.



**Features:**

- 3 function switch: Low, High & Off
- Centre hinge between tubes for 0° to 180° angle of adjustment
- Individual tubes rotate through a full 180°
- Spring loaded, rubber coated bonnet hooks range from 1200mm to 1700mm
- 240V AC/DC charger with 2m cord
- 12V Cig lighter adaptor with 4m cord

**MADE FOR THE  
TRADE**

**Specifications:**

- Battery Power: 7.4V 2200mAh Lithium Ion
- Light Output: 1400 Lumens
- Max working time on High: 1.5 Hours
- Max. working time on Low: 3 Hours
- Charge time: Up to 6 Hours

[www.tqbbrands.com.au](http://www.tqbbrands.com.au)

Visit [www.tqbbrands.com.au](http://www.tqbbrands.com.au) for full details