

FUEL FILTER HA, GB, VA

Thank you for purchasing a Macnaught Fuel Filter.



Please read and retain this instruction sheet to assist you in the operation and maintenance of this quality product. Take particular note of all warnings and safety messages.



Features

Your Macnaught Bowl-Type Fuel Filter utilises a replaceable 10µm paper element, contained within a “See-Thru” weather resistant bowl.

Each unit is manufactured with a Zinc die-cast body, nitrile rubber gasket and a polycarbonate transparent filter bowl - with drain tap. The die-cast body has 1” BSP (F) inlet and outlet threads, and has a maximum working pressure of up to 150 psi (1033 kPa).

The Fuel filters are suitable for use with Diesel fuel, Petrol and Methanol. If other fluids are to be filtered, please consult your Macnaught Distributor.

Important Notes



WARNING

DO NOT USE TEFLON TAPE ON THESE FILTER ASSEMBLIES



Handling flammable liquids is hazardous. There is the potential for an explosion and/or fire. Your personal safety, and the safety of others are at risk. It is your responsibility to know and follow all safety precautions when handling flammable liquids & ensure all equipment operators have adequate instructions concerning safe procedures.

Follow all recommended safety precautions when handling flammable liquids such as petrol.



IMPORTANT

The filter bowl should be hand tightened only

Pumps

HP LITRESTROKE™ -	USE HA-01
GT RAPIDFLO™ -	USE VA-01
RVP ROTARY VANE PUMP -	USE VA-01

Filter Kits




Older Models

GP RAPIDFLO™ -	USE GB-01
----------------	-----------


ASSEMBLY HP LITRESTROKE™ (HA-01)







GP RAPIDFLO™ (GB-01)

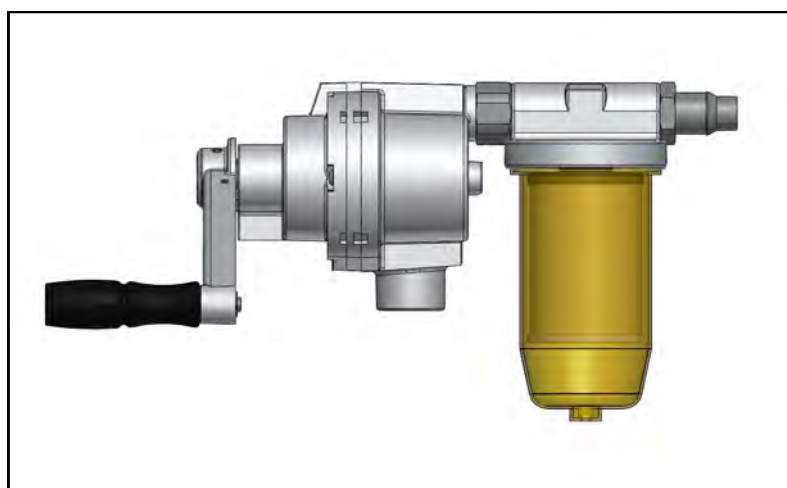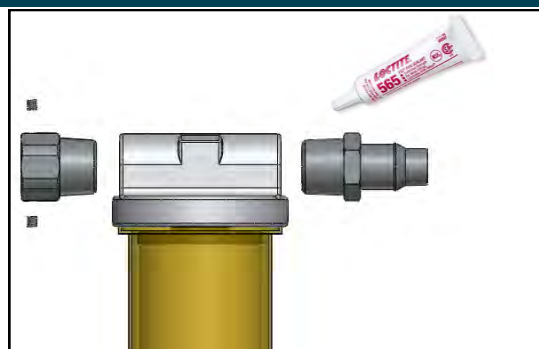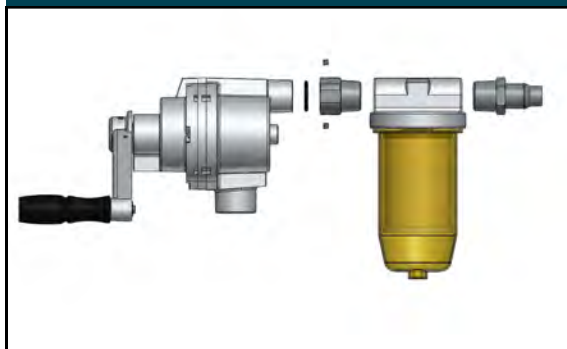

ASSEMBLY RVP (VA-01)

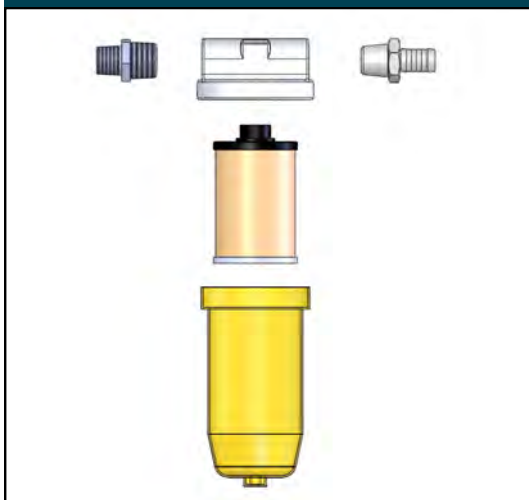

GT RAPIDFLO™ (VA-01)

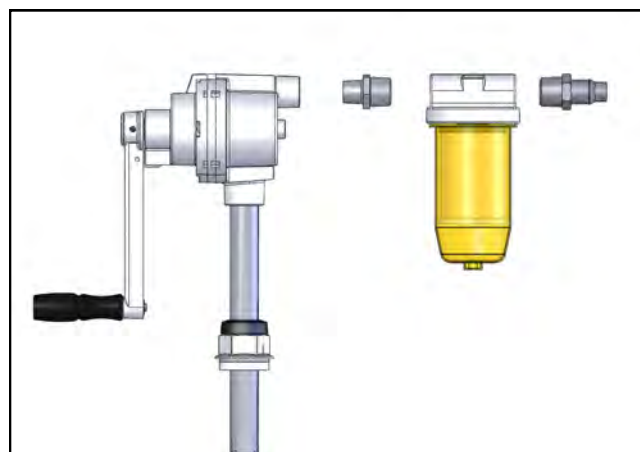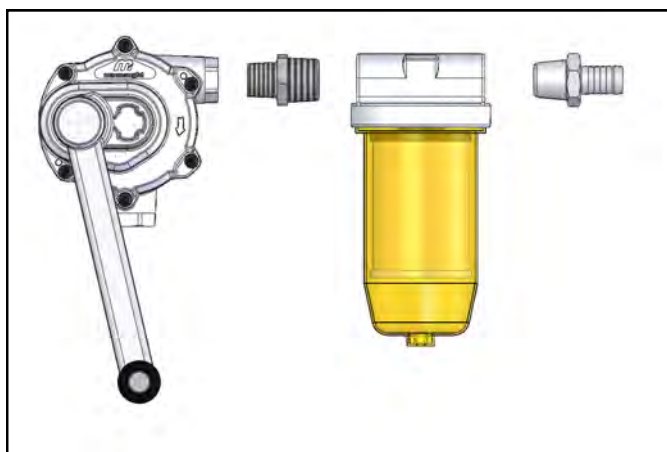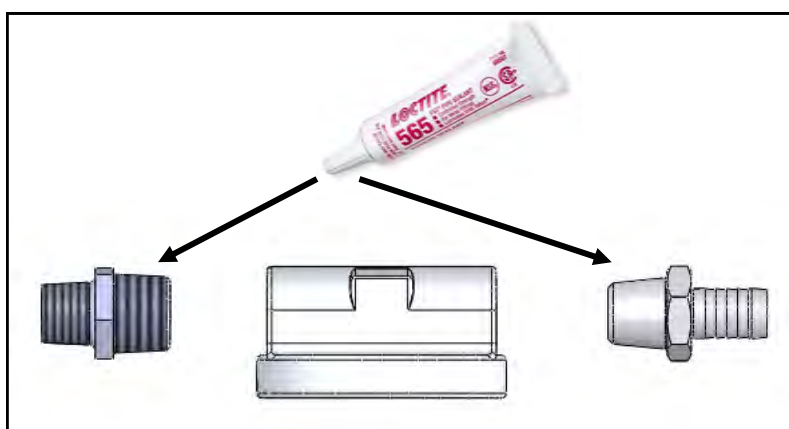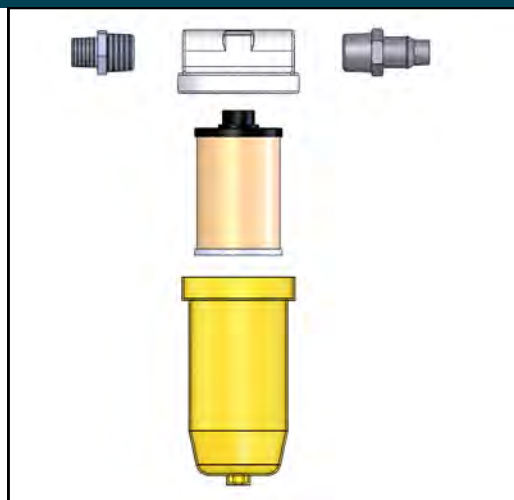

For Warranty Terms and Conditions see macnaught.com.au

