
DGK - SWIVELS

- ✓ **Improved gun mobility**
- ✓ **Plug Nipple: ISO-6150 B-profile**
- ✓ **Spray guns and compressed air guns**
- ✓ **High quality design**
- ✓ **High quality swivel for use with your specific application**

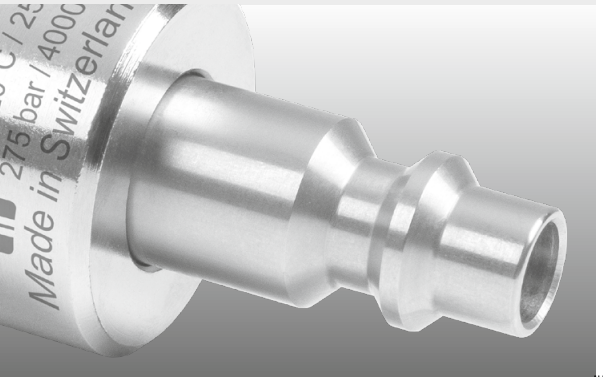


Application

Compressed air guns, paint guns


TECHNICAL DATA

Pressure	275 bar (27.5 MPa)
Temperature	120°C
RPM	max. 30 rpm
Body	stainless steel brass, nickel plated
Inner part	stainless steel
Seal	O-ring NBR (optional: EPDM or FKM)
Bearing	1x thrust ball bearing
Throughput medium	pH 3 - 12 10 µm filtered 20 bar compressed air


Flow

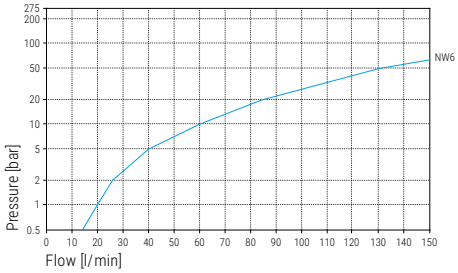

Torque

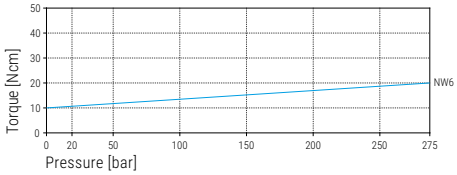




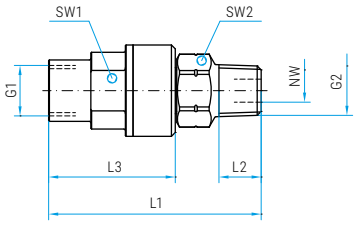

DGK

Part No.	G1 (F)	G2 (M)	NW	SW1	SW2	L1	L2	L3	Weight
32.985	G1/4" F	1/4" NPTM	6	17	17	55	11	33	90 g



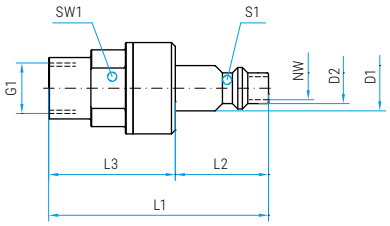

DGK (ISO-6150 B-profile)

Part No.	G1 (F)	S1	NW	SW1	L1	L2	L3	D1	D2	Weight
32.986	G1/4" F	1/4"	6	17	57	24	33	11.8	8	80 g

Legend

M.. = metric thread, **..M =** male thread, **F =** female thread, **G =** gas pipe thread, **R =** conical gas pipe thread, **QV =** quick connects
SV = profile ring fitting, **D =** diameter, **L =** length, **NW =** nominal width, **SW =** wrench size

Additional Seal Options available

EPDM (E) or **FKM/Viton (V)**. Please indicate letter of seal material after part number.
Minimum orders apply.

WWW.MOSMATIC.COM