

SKU F0037501A

PIUSI EX50 Drum 12V DC ATEX Fuel Transfer Kit

Complete ATEX/IECEx drum transfer kit: EX50 12 V DC pump, K33 ATEX meter, A60 ATEX automatic nozzle, filter and 1100 mm telescopic suction pipe. 50 L/min.


50 L/min

Flow rate

12 V DC

Supply

±1%

Meter accuracy

Key features

- K33 ATEX meter and A60 ATEX automatic nozzle
- Suction pipe with integrated filter, plus 10 µm (85%) gasoline filter
- Built-in bypass valve and thermal protection
- Flanged components, no sealants needed
- Diesel, petrol and kerosene
- 1 inch BSP inlet, 3/4 inch delivery hose



Technical data

SPECIFICATION	VALUE
Order code	F0037501A
Fluids	Diesel, petrol, kerosene
Flow rate	50 L/min (13 GPM)
Supply	12 V DC
Power	250 W
Max current	21 A
Meter	K33 ATEX
Nozzle	A60 ATEX automatic
Filter	Yes, 10 µm (85%)
Inlet	1" BSP
Delivery hose	4 m, 3/4"
Suction pipe	1100 mm telescopic

In the box


EX50 pump, telescopic suction pipe, delivery hose, gasoline filter, A60 ATEX nozzle, 2" connector, K33 ATEX meter and instruction manual.

Installation and use

Hazardous area selection must be confirmed by the site EEHA competent person.




Performance

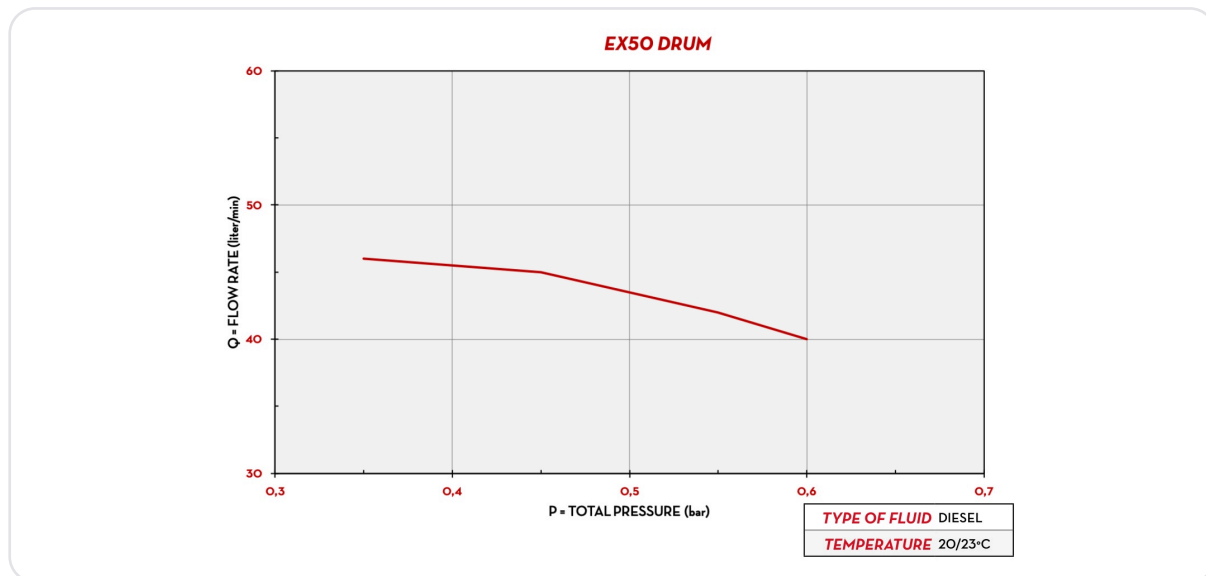

PIUSI EX50 Drum curve on diesel at 20/23°C.

Dimensions

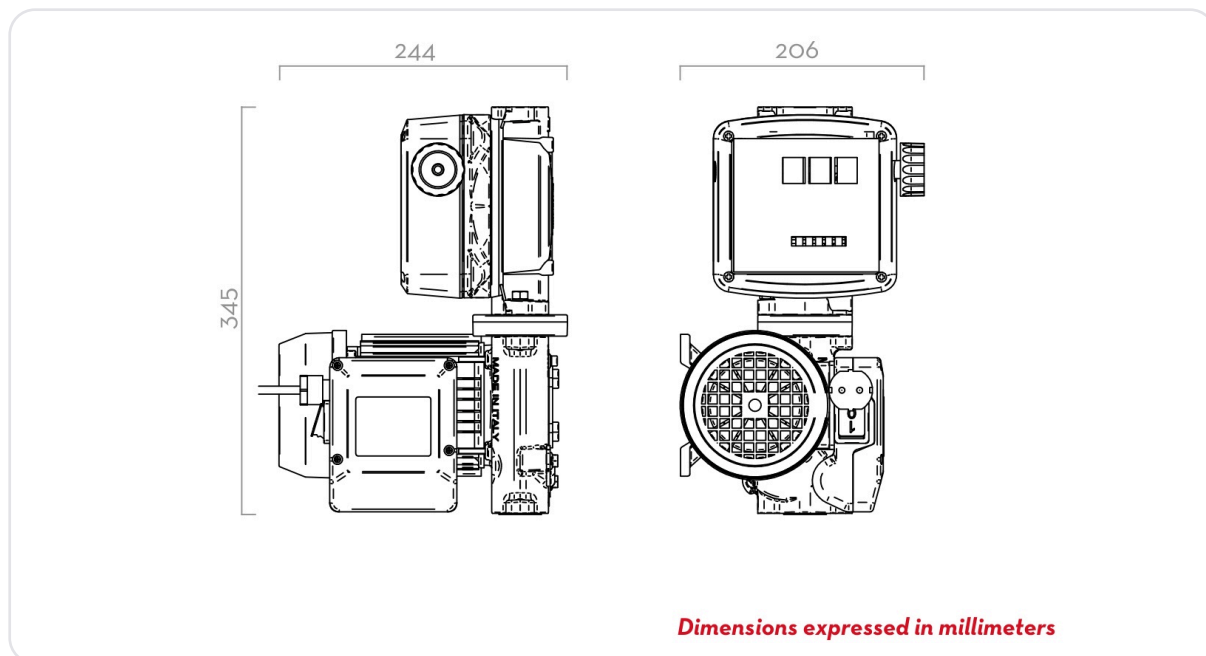

Dimensions in mm, shown with the K33 meter fitted.